



PM212 - Supervised Linear Power Supply / Charger

Overview:

PM212 supervised linear power supply/charger converts a low voltage AC input to a filtered and regulated 12VDC, 1 amp continuous power-limited output.

Specifications:

Input:

- 16VAC/20VA.

Output:

- 12VDC output.
- 1 amp continuous supply current.
- Filtered and electronically regulated output.
- Thermal and short circuit protection with auto reset.

Battery Backup:

- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switchover to stand-by battery when AC Fails.
- PTC battery protection.


Supervision:

- AC fail supervision (form "C" contacts).
- Low battery supervision (form "C" contacts).

Additional Features:

- AC input and DC output LED indicators.
- Includes battery leads.

Board Dimensions (W x L x H): 2.75" x 5.25" x 1.5" (69.85mm x 133.35mm x 38.1mm).

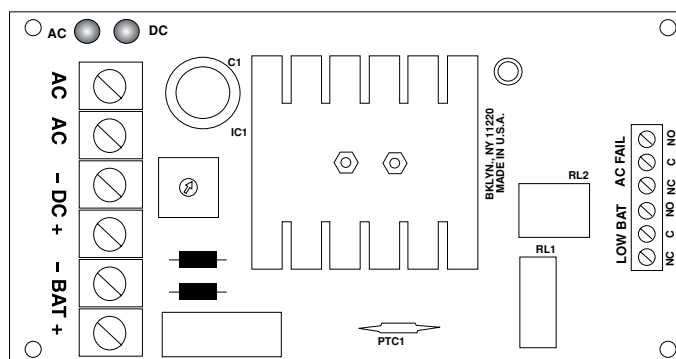

Installation Instructions:

1. Connect proper transformer (16VAC, 20VA) to the terminals marked [AC].
2. Measure output voltage before connecting devices. This helps avoiding potential damage.
3. Connect devices to be powered to the terminals marked [- DC +], carefully observing polarity.
4. When the use of stand-by batteries is desired, they must be lead acid or gel type.
Connect battery to the terminals marked [- BAT +] on the unit (battery leads included).
Note: When batteries are not used, a loss of AC will result in the loss of output voltage.
5. Connect appropriate signaling notification devices to AC Fail & Low battery supervisory relay output terminals marked [N.C., C, N.O.].
Note: During normal operation (AC and battery connected), the N.C. and C relay contacts will be in the closed position and the N.O. and C relay contacts will be in the open position.
These contacts are rated at 2 amp, 120VAC/28VDC.

Terminal Identification:

Terminal Legend	Function/Description
AC / AC	Low voltage AC input (16VAC / 20VA mi.). Altronix part # TP1620.
+ DC -	12VDC @ 1 amp continuous power-limited output.
AC FAIL N.C., C, N.O.	Used to notify loss of AC power, e.g. connect to audible device or alarm panel. Relay normally energized when AC power is present. Contact rating 2 amp @ 120VAC / 28VDC.
Low Battery N.C., C, N.O.	Used to indicate low battery condition, e.g. connect to alarm panel. Relay normally energized when DC power is present. Contact rating 2 amp @ 120VAC / 28VDC.
- BAT +	Stand-by battery connections. Maximum charge rate 200mA.

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056
website: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.
IIPM212 - Rev. 081004

C10N

