

Green Power™

97% Recyclable

Sealed Lead Acid Battery
For standby power supplies

12 Volt 4Ah
GP1240

Specifications


Nominal Voltage		12
Rated Capacity (20 hour rate)		4
Dimensions	Length	90.0 mm (3.54")
	Width	70.0 mm (2.76")
	Height	101.0 mm (3.98")
	Total Height	107.0 mm (4.21")
Approximate Mass		1.4 Kg (3.1 lbs.)
Expected Trickle Life		25°C (77°F) 3-5 yrs
Case Material		ABS
Terminal Type		F1 (.187)



Characteristics

Capacity (25°C, 77°F)		20 hour rate (0.200A) 10 hour rate (0.372A) 5 hour rate (0.680A) 1 hour rate (2.400A)	4.00Ah 3.72Ah 3.40Ah 2.40Ah
Self Discharge (25°C, 77°F)		after standing 3 months after standing 5 months after standing 12 months	91% 82% 64%
Charge method (constant voltage) (25°C, 77°F)	Cycle Use	Initial Current	1.6A or smaller
		Control Voltage	14.5 - 14.9 V
	Trickle Use	Initial Current	0.6A or smaller
		Control Voltage	13.6 - 13.8 V

Discharge Curve 25°C (77°F)

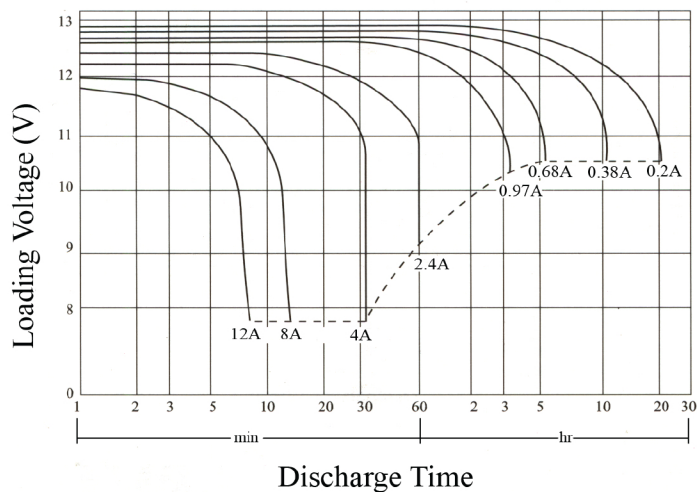

Distributed exclusively by:



877-254-2172