

Green Power™

97% Recyclable

Sealed Lead Acid Battery
For standby power supplies

12 Volt 7Ah
GP1270

Specifications


Nominal Voltage		12
Rated Capacity (20 hour rate)		7
Dimensions	Length	151.0 mm (5.94")
	Width	65.0 mm (2.56")
	Height	94.0 mm (3.70")
	Total Height	100.0 mm (3.94")
Approximate Mass		2.1 Kg (4.7 lbs.)
Expected Trickle Life		25°C (77°F) 3-5 yrs
Case Material		ABS
Terminal Type		F1 (.187)



Characteristics

Capacity (25°C, 77°F)	20 hour rate (0.35A)		7.0Ah
	10 hour rate (0.65A)		6.5Ah
	5 hour rate (1.18A)		5.9Ah
	1 hour rate (4.20A)		4.2Ah
Self Discharge (25°C, 77°F)	after standing 3 months		91%
	after standing 5 months		82%
	after standing 12 months		64%
Charge method (constant voltage) (25°C, 77°F)	Cycle Use	Initial Current	2.80A or smaller
		Control Voltage	14.5 - 14.9 V
	Trickle Use	Initial Current	1.05A or smaller
		Control Voltage	13.6 - 13.8 V

Discharge Curve 25°C (77°F)

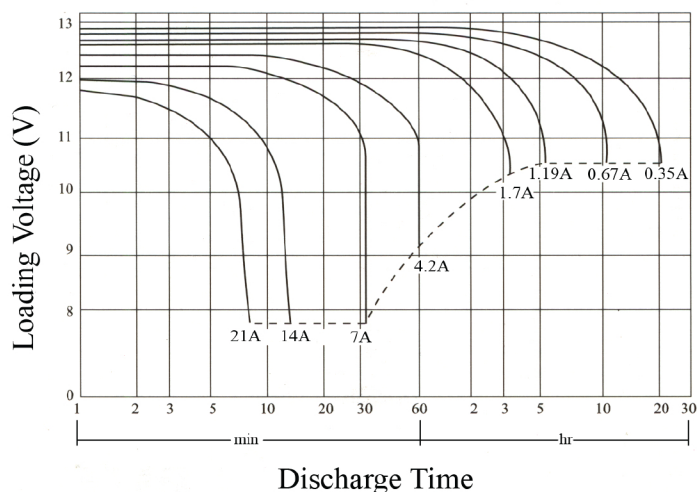

Distributed exclusively by:



877-254-2172