

**NO
EXCUSES!**



The **SSU-PAM-1** Relay provides 10.0 Amp form C contacts. The relay may be energized by one of three input voltages: 24VDC, 24VAC, or 120VAC. The input voltages are polarity sensitive and diode protected. A red LED is provided which, when illuminated, indicates the relay coil is energized. This relay may not be suitable for continuous duty use at the 120VAC coil input for extended periods of time. For these applications please refer to our RIC Series or MR-100/200 Series products.

SAE PN# SSU-PAM-1



The **SSU-PAM-2** Relay provides 7.0 Amp form C contacts. The relay may be energized by one of two input voltages: 12VDC or 24VDC. The input voltages are polarity sensitive and diode protected. A red LED is provided which, when illuminated, indicates the relay coil is energized.

SAE PN# SSU-PAM-2



The **SSU-PAM-SD** Relay provides 7.0 Amp form C contacts. The relay may be energized by an input voltage between 18VDC to 32VDC, making it ideal for 24VDC NAC circuits. The input voltages are polarity sensitive and diode protected. The PAM-SD provides an additional set of wires for redundant input voltage (circuit supervision pass through).

SAE PN# SSU-PAM-SD



PAM Series Relays Multi-Voltage Relay Modules

The PAM Series Relays are encapsulated multi-voltage devices with "flying" leads that offer versatile, reliable performance in a convenient package. Several of the versions provide a red LED which, when illuminated, indicates coil energization. The PAM Series Relays are packaged with a self-tapping screw and a piece of double sided tape for easy installation almost anywhere. The relays are also packaged with wire-nuts to aid installation.

PAM Relays are ideal for applications where remote relays are required for control or status feedback. They are suitable for use with HVAC, temperature control, fire alarm, security, energy management, lighting control systems and building automation systems.



The **SSU-PAM-4** Relay provides 10.0 Amp form C contacts. The relay may be energized across a wide voltage range from 9VDC to 40VDC, making it ideal for 12VDC and 24VDC EOL circuits. The 15mA operating current is constant across the operating range. The input voltages are polarity sensitive and diode protected.

SAE PN# SSU-PAM-4

ISO9001
REGISTERED




**MEA STATE OF
NEW YORK**



Building Control

Space Age Electronics, Inc.
406 Lincoln Street
Marlboro, MA 01752-2195
www.1sae.com
800.486.1723—voice
508.485.0966
508.485.4740—fax

Wiring

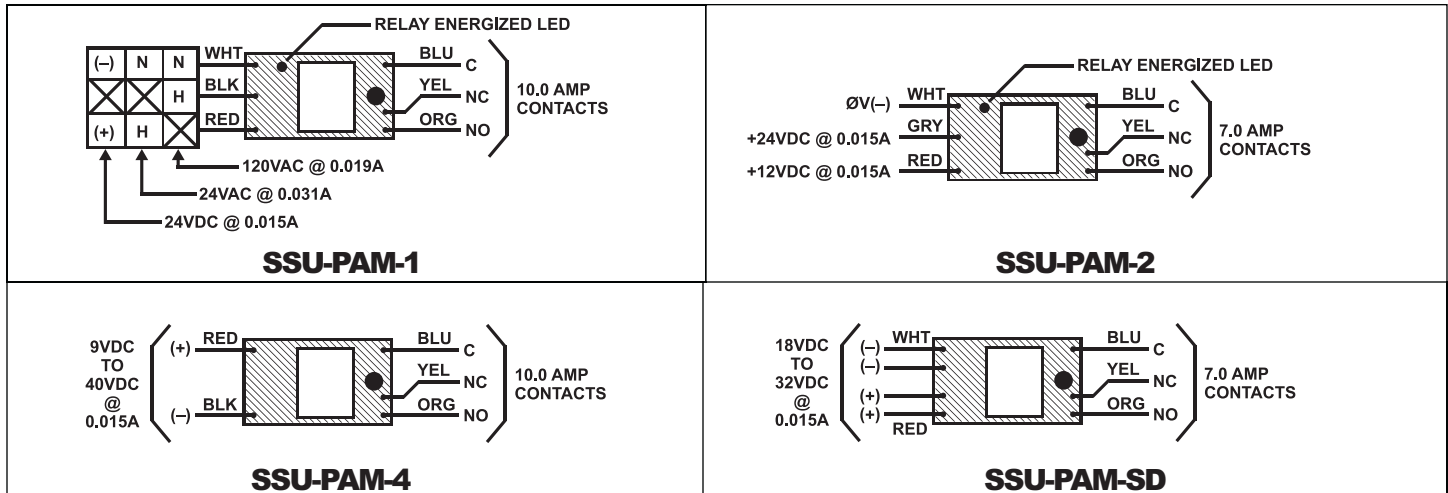

Specifications

SAE PN#	SSU-PAM-1	SSU-PAM-2	SSU-PAM-4	SSU-PAM-SD
COIL VOLTAGE:	24VAC/24VDC/120VAC	12VDC/24VDC	9 to 40VDC	18 to 32VDC
POLARIZED:	YES	YES	YES	YES
ENERGIZED LED INDICATOR:	YES	YES	NO	NO
CURRENT REQUIREMENT:				
@12VDC		15mA	15mA	
@24VDC	15mA	15mA	15mA	15mA
@24VAC	31mA			
@120VAC	19mA			
CONTACT CONFIGURATION:	(1) SPDT Dry Form "C"	(1) SPDT Dry Form "C"	(1) SPDT Dry Form "C"	(1) SPDT Dry Form "C"
CONTACT RATINGS:				
(Contact rating/ Power Factor)				
@5VDC	250μA / .35	250μA / .35	250μA	250μA / .35
@24VDC	7A / .35	7A / .35	7A	7A / .35
@120VAC	10A	7A / .35	10A	7A / .35
WIRE LEADS:	12" / 18 AWG	12" / 18 AWG	12" / 18 AWG	12" / 18 AWG
AMBIENT TEMPERATURE:	-58°F to 185°F	-58°F to 185°F	-58°F to 185°F	-58°F to 185°F
(@ 100% RH, Condensing)	(-50°C to 85°C)	(-50°C to 85°C)	(-50°C to 85°C)	(-50°C to 85°C)
CONSTRUCTION:	100% Potted (Sealed) with "Flying" Leads			
MOUNTING:	Pre-Drilled mounting screw hole and self tapping screw provided. Double sided tape provided.			
DIMENSIONS:				
H	1.5" (38.1mm)	1.5" (38.1mm)	1.5" (38.1mm)	1.5" (38.1mm)
W	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)	1.875" (30.16mm)
D	.875" (22.2mm)	.875" (22.2mm)	.875" (22.2mm)	.8125" (20.64mm)
LISTINGS AND APPROVALS:				
UL*:	U0XX/2/7.S3403	U0XX/2/7.S3403	U0XX/2/7.S3403	U0XX/2/7.S3403
MEA:	73-92-E Vol. 21	73-92-E Vol. 21	73-92-E Vol. 21	73-92-E Vol. 25
CSFM:	7300-1004:101	7300-1004:101	7300-1004:101	7300-1004:101

*UOXX=Control Unit Accessories, System; /2=also Component; /7=also Certified for Canada

NOTICE: The information contained in this document is intended only as a summary and is subject to change without notice. The products described have specific instructional/ installation documentation, which covers various technical, approval, code, limitation and liability information. Copies of this documentation along with any general product warning and limitation documents, which also contain important information, are provided with the product and are also available from Space Age Electronics, Inc. The information contained in all of these documents should be considered before specifying or using the products. Any example applications shown are subject to the most current enforced local/national codes, standards, approvals, certifications, and/or the authority having jurisdiction. All of these resources, as well as the specific manufacturer of any shown or mentioned related equipment, should be consulted prior to any implementation. For further information or assistance concerning the products, contact Space Age Electronics, Inc. Space Age Electronics Inc. reserves the right to change any and all documentation without notice.

Building Control

Space Age Electronics, Inc.
406 Lincoln Street
Marlboro, MA 01752-2195
www.1sae.com
800.486.1723—voice
508.485.0966
508.485.4740—fax