


PRODUCT SPECIFICATIONS

PART#: 16/2SP-65-BK		DESCRIPTION: 2C/16 AWG 65 STRAND SPEAKER CABLE, PVC-BLACK- 500 FT BOX			
Edition:	B	Date:	2012/11/26	Rev Date:	2014/02/21
Approval:	Richard	Checked:	John	Finish:	Jennifer

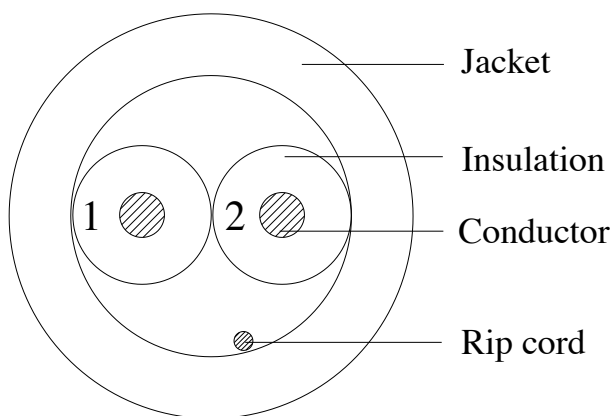

Regulatory: UL 444 & UL 13, NEC Article 760 & NEC Article 725

Type (UL) CMR/CL3R or c(UL) FT4

EU RoHS 2011/65/EU Compliant

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 2C (1.31mm ²)
	Construction	65/0.16mm(0.0063")±0.004mm
Insulation	Material	PVC
	Min. Thickness	0.27mm(0.0106")
	AVG. Thickness	0.31mm(0.0122")
	Diameter	2.10mm(0.0827")±0.05mm
	Colors	Black & Red
Jacket	Material	PVC
	AVG. Thickness	0.50mm(0.0197")
	Min. Thickness	0.45mm(0.0177")
	Diameter	5.10mm(0.2008")±0.10mm
	Rip Cord	Nylon
	Color	Per request

Electrical & Physical Characteristics:

Rating			75℃ 300V	
Conductor Resistance			Max 15.5ohm/km at 20℃	
Insulation Resistance			Min 50MΩ·km at 20℃	
Dielectric Strength			Min AC1.5KV	
AC Leakage Current Through overall Jacket			AC 1500V ≤10mA	
Mutual capacitance			< 9.8 nF/100M	
Twists per foot			3.0	
Insulation	Unaged	Tensile Strength	13.8 Mpa	
		Elongation	150%	
	Aged	Tensile Strength	11.7 Mpa(100℃ 168h)	
		Elongation	80%(100℃ 168h)	
Jacket	Unaged	Tensile Strength	13.8 Mpa	
		Elongation	150%	
	Aged	Tensile Strength	11.7 Mpa(100℃ 168h)	
		Elongation	80%(100℃ 168h)	
Cold Bend Test			-20℃ 4hours No Cracking	
Marking: STRUCTURED CABLE PRODUCTS --- P/N 16/2SP-65 --- 2 COND 16 AWG 65 STRAND TYPE CMR/CL3R FT4 75C -- (UL) OR C(UL) E198137 CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXXXFEET				
Packaging:				
Approx. Weight(kg)		Approx. Dimension(mm)	package	Packages per Pallet
7.15		280X240X300	500 ft/Box	64/48
13.60		335X260X350	1000 ft/Box	36