


PRODUCT SPECIFICATIONS

PART#: CAT6-P-BL		DESCRIPTION: CAT6 PLENUM- ENHANCED 550 MHz 23 AWG SOLID 4PR UTP, TIA/EIA 568-C.2, CMP- BLUE- 1000 FT BOX			
Edition	A	Established Date	2012/12/13	Rev Date	2013/06/25
Approval	Richard	Checked	John	Finish	Leo

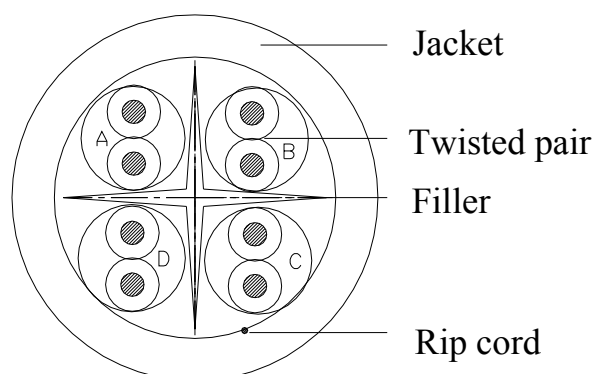

Standard: UL 444 、 ANSI/TIA-568-C.2 & ISO/IEC 11801

Application: Lan Cable

Construction Characters:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57±0.005mm
Insulation	Material	FEP
	Min. Thickness	0.185mm
	AVG. Thickness	0.200mm
	Diameter	0.97±0.01mm
	Colors	Blue-White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Filler	Filler	PVC
Jacket	Material	PVC
	AVG. Thickness	0.50mm
	Min. Thickness	0.45mm
	Diameter	6.00±0.10mm
	Colors	Per request
	Rip Cord	Nylon

Electrical & Physical Characters

rating	75°C 30V
Conductor Resistance	Max 72.2ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Spark Test	5.0KV
AC Leakage Current Through overall Jacket	AC 1500V ≤10mA

PRODUCT SPECIFICATIONS

Insulation	Unaged	Tensile Strength	11.8 Mpa
		Elongation	150%
	Aged	Tensile Strength	10.1 Mpa(100°C 168h)
		Elongation	80%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8 Mpa
		Elongation	150%
	Aged	Tensile Strength	11.7 Mpa(100°C 168h)
		Elongation	80%(100°C 168h)
		Cold Bend Test	-20℃ 4hours No Cracking
		DC Resistance Unbalance	Max 5%
		Pair-to-Ground Capacitance Unbalance	Max 3300pF/km
		Characteristic Impedance	1~500MHZ 100±15OHM
		Propagation Delay	500MHZ Max 536ns/100m
		Delay Skew	1~500MHZ Max 40ns/100m
Marking: STRUCTURED CABLE PRODUCTS --- P/N CAT6-P --- CAT6 ENHANCED 550 MHz 4 PR 23 AWG UTP VERIFIED TO ANSI/TIA-568-C.2 CMP FT6 75C -- cETLus 30099905 CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXXXFEET			
Packaging:			
Approx. Weight(kg)		Approx. Dimension(mm)	package
16.60		335X270X335	1000 ft/Reel-in-Box
16.00		390X280X420	1000 ft/Box
			Packages per Pallet
			36
			36/24

Performance

ITEM	Attention	NEXT	PS NEXT	RL	ELFEXT	PS ELFEXT	ACR
Frequency	Max (dB/100m)	Min (dB)	Min (dB)	Min (dB)	Min (dB)	Min (dB)	Min (dB)
1	2.1	74.3	72.3	20.0	67.8	64.8	72.2
4	3.8	65.3	63.3	23.0	55.8	52.8	61.5
8	5.3	60.8	58.8	24.5	49.7	46.7	55.5
10	5.9	59.3	57.3	25.0	47.8	44.8	53.4
16	7.5	56.2	54.2	25.0	43.7	40.7	48.7
25	9.4	53.3	51.3	24.3	39.8	36.8	43.9
31.25	10.5	51.9	49.9	23.6	37.9	34.9	41.4
62.5	15.0	47.4	45.4	21.5	31.9	28.9	32.4
100	19.1	44.3	42.3	20.1	27.8	24.8	25.2
200	27.6	39.8	37.8	18.0	21.8	18.8	12.2
250	31.1	38.3	36.3	17.3	19.8	16.8	7.2
300	34.3	37.1	35.1	16.8	18.3	15.3	2.8
400	40.1	35.3	33.3	15.9	15.8	12.8	---
500	45.3	33.8	31.8	15.2	13.8	10.8	---