

VTC-T4B4HR5MD

5 MegaPixel 4-in-1 Indoor / Outdoor HDA Dual Voltage
(12VDC/24VAC) Motorized Varifocal Bullet Camera [Preliminary Specs]



VITEKCCTV.COM
(888) VITEK-70



KEY FEATURES

- 1/2.8" 5.69 Megapixel Sony® Starvis™ Progressive Scan CMOS Sensor
- 20fps live view @ 2592 x 1944p
- True Day/Night by IR Cut Filter
- HD-TVI / HD-CVI / AHD / 960H CVBS Video Output (Selectable)
- Motorized 2.7~13.5mm MegaPixel IR Corrected Auto Focus Varifocal Lens
- 4 Integrated High Power Dynamic IR LEDs with up to 165' IR Range
- XD-DNR Noise Reduction (3D & 2D-DNR)
- True Wide Dynamic Range (WDR)
- Auto White Balance
- IP66 Weather Resistance
- Supports Control over COAX (CoC)
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- Optional Junction Box Available (VT-TJB04)
- 12VDC / 24VAC Dual Voltage Operation
- 3 Year Warranty

ACCESSORIES



VT-TJB04 - Optional Junction Box for Use with
VTC-T4B4HR5MD / 8MD, and VTC-T4T3HR5MD / 8MD




VT-TR4VPK
Video and Power Balun
Transmitter / Receiver
Pair for HD-TVI / AHD
/ CVI for Distances
Up to 1000'



VT-TR4K
Passive Video Balun
Transmitter / Receiver
Pair for HD-TVI /
AHD / CVI for
Distances Up to
1440'

DIMENSIONS

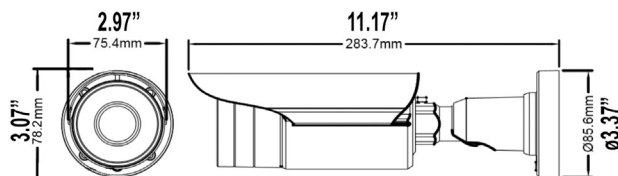

RECORDERS



Pair with **VITEK Transcendent
Series 5-in-1 Digital Video Recorders**
Supporting HD-TVI / AHD / CVI / IP /
960H Cameras!



SPECIFICATIONS

Image Sensor	1/2.8" 5.69 Megapixel Sony® Starvis™ Progressive Scan CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2592 (H) × 1944 (V)
Resolution / Video Output	Up to 5MP TVI: 1080P@25fps, 1080P@30fps, 4MP@25fps, 4MP@30fps, 5MP@12.5fps, 5MP@20fps AHD: 1080P@25fps, 1080P@30fps, 4MP@25fps, 4MP@30fps, 5MP@12.5fps, 5MP@20fps CVI: 1080P@25fps, 1080P@30fps, 4MP@25fps, 4MP@30fps
Lens	Motorized 2.7 ~ 13.5mm Motorized Varifocal Lens
Day/Night	True Day/Night by ICR (Extern, Color, B&W, Auto)
Min. Illumination	0.001 Lux @ f2 (B/W) / 0.1Lux @ F2.0 (Color) / 0 Lux (IR ON)
IR LEDs	4x High Power Dynamic IR LEDs
IR Distance	Up to 165'
DSS (Sens-Up)	OFF / X2 ~ X32
S/N Ratio	≥50dB (AGC Off)
WDR	Double Shutter Wide Dynamic Range (WDR)
Digital Noise Reduction	XD-DNR (2D-DNR & 3D-DNR)
White Balance	Auto / Present / External / Manual
BLC	Adjustable
Defog	Adjustable
Privacy Mask	16 Programmable Areas
Motion Detection	4 Programmable Areas
Control over COAX (CoC)	YES
Transmission Distance	Up to 1500' (Depending on cable characteristics & integrity)
Power Input	Dual Voltage: 12VDC / 24VAC
Power Consumption	<7.5W
Power Consumption (12VDC)	600mA (IR ON) / 300mA (IR OFF)
Power Consumption (24VAC)	300mA (IR ON) / 150mA (IR OFF)
Weather Resistance	IP66
Storage Temperature	-4° ~ 122°
Working Conditions	14° ~ 122° / Humidity 90% or less
Weight	31.04 oz. / 1.94 lbs. / 880g
Dimensions	2.97" × 3.07" × 11.17" (75.4 × 78.2 × 283.7mm)