

VTC-THB8R2

Transcendent Series 8 MegaPixel [4K] Indoor/Outdoor
4-in-1 Fixed Bullet Camera



VITEKCCTV.COM
(888) VITEK-70



KEY FEATURES

- 1/2.5" 8MegaPixel [4K] Progressive Scan CMOS image sensor
- High Definition Analog (HDA) / HD-TVI / AHD / HD-CVI / CVBS
- 8MP@15fps, 5MP@20fps, 4MP@30fps High Res, True Color
- Supports OSD Menu
- Digital Wide Dynamic Range (D-WDR)
- 2.8mm Fixed Iris Lens
- 1 Matrix IR with up to 100' IR Range
- True Mechanical Day/Night function by ICR
- 3D-DNR (Digital Noise Reduction)
- IP67 Weather Resistance
- Supports Control over COAX (CoC)
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- Wall Mount Included and Optional Junction Boxes (VT-TJB08) Available
[See Other Mounting Options Below]
- 12VDC Operation
- 3-Year Warranty

ACCESSORIES



VT-TJB08
Optional Junction Box
for Cable Management



VT-TPLMT
Universal Pole
Mount - Ivory,
reqs. VT-TJB08



VT-TCNMT
Universal Corner
Mount - Ivory, reqs.
VT-TJB08



VT-TR4VPK
Video and Power
Balun Transmitter
/ Receiver Pair for
HD-TVI / AHD / CVI
for Distances Up to
1000'



VT-TR4K
Passive Video
Balun Transmitter
/ Receiver Pair for
HD-TVI / AHD /
CVI for Distances
Up to 1440'


RECORDERS



Pair with VITEK Transcendent
Series 5-in-1 Digital Video Recorders
Supporting HD-TVI / AHD / CVI / IP /
960H Cameras!

SPECIFICATIONS

Image Sensor	1.25" 8.0 MegaPixel Progressive Scan CMOS Sensor
Signal System	NTSC/PAL
Effective Pixels	3840 × 2160
Resolution	HD-TVI & AHD: 8.0 MegaPixel / CVI: 4.0 MegaPixel / CVBS: 960H
Video Output	HD-TVI / AHD / CVI / CVBS (Selectable)
Frame Rate	8MP@15fps / 5MP@20fps / 4MP@30fps
Lens	2.8mm - Fixed
Day/Night	True Day/Night by ICR
Min. Illumination	Color: 0.001 lux@F1.2, AGC ON / B/W: 0 lux (with IR ON)
IR LEDs	1 Matrix
IR Distance	Up to 100'
Dynamic (Smart) IR	YES
S/N Ratio	≥52 dB (AGC Off)
Wide Dynamic Range	D-WDR (Digital Wide Dynamic Range)
Digital Noise Reduction	3D-DNR
Auto White Balance	YES (AWB)
Back Light Compensation	YES (BLC)
Control over COAX (COC)	YES
Transmission Distance	Up to 1500' (Depending on Cable Characteristics and Integrity)
Power Input	12VDC
Power Consumption	IR Off: < 2W / IR On: < 5W
Weather Resistance	IP67
Operation Conditions	-4° ~ 122° / 10% ~ 90% Humidity
Weight	15.52oz / .97lb / 440g
Dimensions L × W × H	6.58" × 2.93" × 2.93" (167.5mm × 74.5mm × 74.5mm)

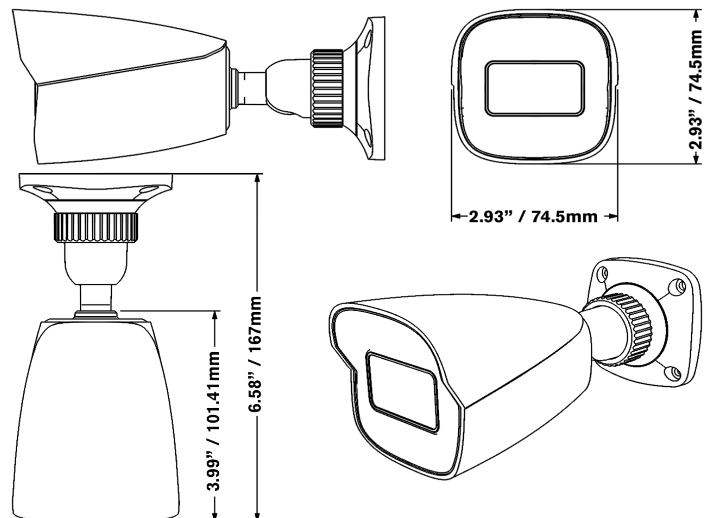

(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On
Innovation