

VTD-T4D6HR5MD

5.0 Megapixel 4-in-1 Motorized Varifocal WDR Vandal Dome Camera with 6 High Power IR LED Illumination



VITEKCCTV.COM
(888) VITEK-70



KEY FEATURES

- 1/2.5" 5.0 Megapixel Progressive Scan CMOS Sensor
- 5MP@20fps/12.5fps, 4MP@30fps/25fps/15fps, 1080P@30fps/25fps
- True Day / Night by IR Cut Filter
- HD-TVI / HD-CVI / AHD / 960H CVBS Video Output (Selectable)
- 2.8~12mm Motorized Varifocal Lens
- 6 Integrated High Power Dynamic IR LEDs with up to 165' IR Range
- XD-DNR (3D-DNR / 2D-DNR) Noise Reduction
- True Wide Dynamic Range (WDR)
- IP66 Weather Resistance, 4000V Lightning Protection
- Supports CoC (Control over COAX)
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- 12VDC / 24VAC Dual Voltage Operation
- 3 Year Warranty

ACCESSORIES



Push-button Style Cable Switch
+ Mounting Screws



VT-TJB06 - Optional Junction Box for Cable Management for Transcendent VTD-T4D6HR5MD and VTD-T4D6HR8MD



VT-TWM4-D - Optional Wall Mount for Transcendent VTD-T4D6HR5MD and VTD-T4D6HR8MD




VT-TR4VPK
Video and Power Balun
Transmitter / Receiver
Pair for HD-TVI / AHD
/ CVI for Distances
Up to 1000'



VT-TR4K
Passive Video Balun
Transmitter / Receiver
Pair for HD-TVI /
AHD / CVI for
Distances Up to
1440'

DIMENSIONS

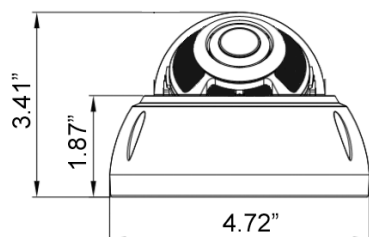

SPECIFICATIONS

Image Sensor	1/2.5" 5 Megapixel Progressive Scan CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2704 (H) × 1950 (V)
Resolution	5MP@20fps/12.5fps, 4MP@30fps/25fps/15fps, 1080P@30fps/25fps
Video Output	HD-TVI / HD-CVI / AHD / CVBS (Selectable), 1Vp-p Composite Output(75Ω/BNC), 4-in-1
Lens	Motorized 2.8~12mm MegaPixel IR Corrected Varifocal Lens
Day/Night	True Day/Night by ICR (Extern, Color, B&W, Auto)
Min. Illumination	Color 0.017 LUX / BW 0.0008 LUX
Shutter Speed	Auto
IR LEDs	6 x High Power Dynamic IR LEDs
IR Distance	165' (50M)
Smart IR	YES
OSD Cable	YES
S/N Ratio	≥50dB (AGC Off)
WDR	Off / On
Digital Noise Reduction	XD-DNR (3D-DNR, 2D-DNR) Auto / Manual 0~20
White Balance	Auto
BLC	Adjustable - GLOBAL / ON: 0~7
Brightness / Sharpness	0~100 Steps, AUTO / MANUAL: 0~20
Control over COAX (COC)	YES
Transmission Distance	Up to 1500' (Depending on cable characteristics & integrity)
Power Input	Dual Voltage: 12VDC / 24VAC
Max Power	6W
Power Consumption (12VDC)	560mA (IR ON) / 280mA (IR OFF)
Power Consumption (24VAC)	280mA (IR ON) / 140mA (IR OFF)
Resistance Rating	IP66 / IK10
Lightning Protection	4000V
Operation Conditions	-4~140F / 10%~90% Humidity
Weight (Net)	18.34oz / 1.15lbs / 520g
Weight (Shipping)	21.87oz / 1.37lbs / 620g
Dimensions (Dia × H)	4.72" × 3.41" × 4.72" (120cm × 86.5cm × 120mm)

RECORDERS



Pair with VITEK Transcendent
Series 5-in-1 Digital Video Recorders
Supporting HD-TVI / AHD / CVI / IP /
960H Cameras!



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On
Innovation