

VTD-T4D6HR8MD

8.0 Megapixel 4-in-1 Motorized Varifocal WDR Vandal Dome Camera with 6 High Power IR LED Illumination



VITEKCCTV.COM
(888) VITEK-70



KEY FEATURES

- 1/2.3" 8.0 Megapixel [4K] Progressive Scan CMOS Sensor
- 8MP[4K]@15fps/12.5fps, 4MP@30fps/25fps, 1080P@30fps/25fps
- True Day / Night by IR Cut Filter
- HD-TVI / HD-CVI / AHD / 960H CVBS Video Output (Selectable)
- 3.6~10mm Motorized Varifocal Lens
- 6 Integrated High Power Dynamic IR LEDs with up to 165' IR Range
- XD-DNR (3D-DNR / 2D-DNR) Noise Reduction
- True Wide Dynamic Range (WDR)
- IP66 Weather Resistance, 4000V Lightning Protection
- Supports CoC (Control over COAX)
- Over 1500' HD Video Transmission (Depending on cable characteristics and integrity)
- 12VDC / 24VAC Dual Voltage Operation
- Available in Ivory or Charcoal (VTD-T4D6HR5MDB)
- 3 Year Warranty

ACCESSORIES



INCLUDED Push-button Style Cable Switch + Mounting Screws



VT-TJB06 - Optional Junction Box for Cable Management - Add "B" for Charcoal Version



VT-TWM4-D - Optional Wall Mount - Add "B" for Charcoal Version




VT-TR4VPK
Video and Power Balun Transmitter / Receiver Pair for HD-TVI / AHD / CVI for Distances Up to 1000'



VT-TR4K
Passive Video Balun Transmitter / Receiver Pair for HD-TVI / AHD / CVI for Distances Up to 1440'

DIMENSIONS

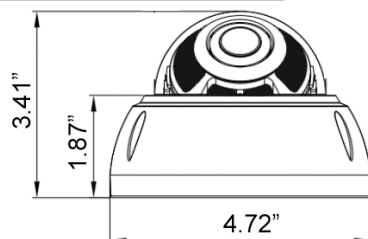

SPECIFICATIONS

Image Sensor	1/2.3" 8 Megapixel Progressive Scan CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	3840 (H) × 2160 (V) [4K]
Resolution	8MP@15fps/12.5fps, 4MP@30fps/25fps, 1080P@30fps/25fps
Video Output	HD-TVI / HD-CVI / AHD / CVBS (Selectable), 1Vp-p Composite Output(75Ω/BNC), 4-in-1
Lens	Motorized 3.6~10mm MegaPixel IR Corrected Varifocal Lens
Day/Night	True Day/Night by ICR (Extern, Color, B&W, Auto)
Min. Illumination	Color 0.01 LUX @ f2 / BW 0.0 LUX (IR ON)
Shutter Speed	Auto
IR LEDs	6 x High Power Dynamic IR LEDs
IR Distance	165' (50M)
Smart IR	YES
OSD Cable	YES
S/N Ratio	≥50dB (AGC Off)
WDR	Off / On
Digital Noise Reduction	XD-DNR (3D-DNR / 2D-DNR)
White Balance	Auto
BLC	Adjustable - GLOBAL / ON: 0~7
Brightness / Sharpness	0~100 Steps, Auto / Manual 0~20
Control over COAX (COC)	YES
Transmission Distance	Up to 1500' (Depending on cable characteristics & integrity)
Power Input	Dual Voltage: 12VDC / 24VAC
Max Power	8W
Power Consumption (12VDC)	560mA (IR ON) / 280mA (IR OFF)
Power Consumption (24VAC)	280mA (IR ON) / 140mA (IR OFF)
Resistance Rating	IP66 / IK10
Lightning Protection	4000V
Operation Conditions	-4~140F / 10%~90% Humidity
Weight (Net)	18.34oz / 1.15lbs / 520g
Weight (Shipping)	21.87oz / 1.37lbs / 620g

RECORDERS

Pair with VITEK Transcendent Series 5-in-1 Digital Video Recorders Supporting HD-TVI / AHD / CVI / IP / 960H Cameras!



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On
Innovation