

VTD-TND8RFA4-2

Transcendent Gen. IV 8 MegaPixel [4K] Advanced A.I.
Fixed Lens Vandal Dome Camera [PRELIMINARY SPECS]



KEY FEATURES

- 1/2.8" 8 MegaPixel [4K] Progressive Scan CMOS Sensor
- NDAA Compliant
- Up to 30fps live view @ 8 MegaPixel (3840×2160)
- 2.8mm Fixed Iris Lens
- Matrix IR (up to 100' IR Range)
- True Wide Dynamic Range (120dB)
- True Mechanical Day/Night function by ICR
- XD-DNR (3D & 2D-DNR) Noise Reduction
- Gen. IV Advanced Analytics: Regional Entrance / Exiting Detection, Line Crossing, Target Counting [All by Human / Motor Vehicle Classification] Face Detection, Video Blur, Video Color Cast Detection, Abnormal Video
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 1 Ch. Audio In + Built-in Mic*
- Remote Viewing via CMS, Internet Explorer, iOS & Android Apps
- ONVIF Compliant
- MicroSD Card Slot for Local Recording (256GB)
- IP67 Weather Resistance + IK10 Impact Rating
- Optional Junction Box (VT-TJB03A), Wall Mount (VT-TWMT3), Pendant Mount (VT-TPDM-1 [reqs. VT-TJB03A]) and In-Ceiling Semi Flush Mount (VT-TFMT-S) Available [See Additional Mounting Options Below]
- 12VDC & PoE (Power over Ethernet) Operation
- 3-Year Warranty


*Please research local, state and federal laws regarding the implementation of audio surveillance.



TRANSCENDENT "GEN IV" SERIES NDAA COMPLIANT IP CAMERAS WITH AI POWERED FACIAL DETECTION AND MORE!

Transcendent Series NDAA Compliant High Definition 8 Megapixel [4K] IP Network Cameras with Gen. IV Advanced Analytics including Face Detection and Target Counting offer unprecedented performance and value. These simple, easy to install, attractively styled, IP Network Cameras transmit over remote viewing via CMS, Internet Explorer, and iOS & Android Apps.

GEN. IV ADVANCED ANALYTICS




**FACIAL
DETECTION**
Security personnel
can find out who
entered / left the
restricted area and
at what time



**TARGET
COUNTING**
Keep count of
vehicles,
motorbikes,
bicycles and people
in a given area



**REGIONAL
ENTRANCE/EXIT**
Begin NVR recording
and receive an alert upon
subjects entering /
exiting; ideal for
property monitoring

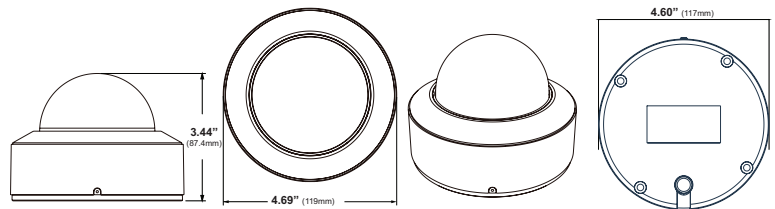

Pair with VITEK Transcendent Series
Network Recorders VT-TNR818PF,
VT-TNR1646PF, and VT-TNR3216PF with
Built-in PoE and Fully Programmable
Intelligent Analytics including Facial
Detection.

An Eye On
Innovation

VT-TJB03A
Optional
Junction box
for Cable
Management



VT-TWMT3
Optional Wall
Mount



VT-TPDM-1
Pendant Mount
- reqs.
VT-TJB03A



VT-TFMT-S
In-Ceiling
Semi-Flush
Mount



VT-TPLMT
Universal Pole
Mount Adapter -
reqs. VT-TJB03A



VT-TCNMT
Universal Corner
Mount Adapter -
reqs. VT-TJB03A



www.vitekccv.com



DETAILED SPECIFICATIONS

Image Sensor	1/2.8" 8.0 Megapixel [4K] Progressive Scan CMOS
NDAA Compliant	Yes
Image Size	8 MegaPixel (3840 × 2160)
Resolution	8MP (3840×2160), 6MP(3072×2048), 5MP(2592×1944), 4MP(2592×1520), 2K(2560×1440), 3MP(2304×1296), 1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240
Min. Illumination	0.01 lux @ F1.2, AGC ON; 0 lux with IR, 0.02 lux@F1.6, AGC ON; 0 lux with IR
Lens	2.8mm Fixed Iris Lens
Day / Night	True Day / Night by ICR
IR LEDs / IR Distance	2 Matrix Style IRs / Up to 100'
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
Audio Compression	G.711A / G.711U
Main-Stream	60Hz: 8/6/5/4MP/2K/3MP/1080P/720P(1~30fps), 50Hz: (1~25fps) HFR:1080P 720P(60Hz: 1 60fps; 50Hz: 1~50fps)
Sub / Third Stream	1080P/720P/D1/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps), 720P/D1/CIF/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate / Type	64 Kbps ~ 12 Mbps / VBR, CBR
Wide Dynamic Range	120dB Super WDR
Other Features	Highlight Compensation, Backlight Compensation, DeFog, Hardware Reset
Digital Noise Reduction	XD-DNR (3D-DNR & 2D-DNR)
Image Setting	ROI, Saturation, Brightness, Chroma, Contrast, Sharpen, NR; adjustable through client software / web browser
Gen. IV Advanced Analytics	Regional Entrance / Exit Detection, Line Crossing, Target Counting <i>[all by Human / Motor Vehicle Classification]</i> Face Detection, Video Blur, Video Color Cast Detection, Abnormal Video
Smart Alarm	Motion Detection, SD Card Error, SD Card Full
Region of Interest (ROI)	Each ROI to be configured separately
Audio	1 Ch. Audio In + Built-in Mic*
Alarm	N/A
Local Storage	Built-in MicroSD Card Slot (up to 256GB)
Remote Viewing	CMS / Web Browser / Mobile (iOS/Android)
Supported Browsers	Internet Explorer, Chrome and Firefox with IE Tab
Connection Protocol	ONVIF
Ingress Protection / Impact	IP67 + IK10 Impact Rating
Power Input	12VDC / PoE
Pwr Consumption (12VDC)	350mA (LEDs Off) / 750mA (LEDs On)
Power Consumption (PoE)	<9W
Working Environment	-22° ~140° / < 95% Humidity
Weight	24.69 oz. / 1.54 lbs. / .70kg (NET) 29.98 oz. / 1.87 lbs/ .85kg (SHIPPING)
Dimensions (Dia × H)	3.69" × 3.44" (119mm × 87.4mm)

*Please research local, state and federal laws regarding the implementation of audio surveillance.