

VTM-SCT-U4

Four Inch Hand-held 5-in-1 [4K H.265 IP / TVI / CVI / AHD / CVBS] CCTV Testing Monitor

VITEK
INDUSTRIAL VIDEO PRODUCTS, INC.
VITEKCCCTV.COM
(888) VITEK-70



**MULTI
FORMAT**

**HD
OVER COAX**

**4K
8MP**



APPLICATIONS

The Vitek **VTM-SCT-U4** Multi Format Testing Monitor is an indispensable All-in-One tool for the most demanding CCTV Installers. The compact 4-inch touch-screen display boasts a high quality 800 x 480px image, displaying HD Network and COAX-based cameras in high resolution. This model also supports ONVIF, PTZ control, Network Cabling Installation, Video Transmission Channel Testing, and more.

KEY FEATURES


- Supports 8MP TVI / CVI / AHD, 4K H.265 IP, CVBS
- H.265/H.264, 4K Video Display via Mainstream
- Compact, 4" Touch Screen
- Portable, Easy-to-Carry-and-Hold Design
- ONVIF Compliant with Other Leading Manufacturers' IP Cameras
- Rapid ONVIF, Auto View Video + Test Report Creation
- Built in WIFI, Creates WIFI Hotspot & Displays Wireless Camera Images
- Innovative HD-Over-COAX Focus, Video Signal Quality Test
- 10/100/1000M Ethernet, Network State and Traffic Display
- Tester Play: Simultaneous Tester, Android Mobile Phone, PC Display
- One Button IP Discovery: Detects All Network Camera IP Addresses
- One Button Rapid Video: Detects all Network Cameras with Auto Display
- Network Tool: PING Test, IP Address Scan, Port Flashing
- Drop-down Menu Selects: Poe Power, IP Setting, CVBS, LAN Information
- Self-updating Software: Install Apps with Android
- Media player, Supports 4K Video Files and MKV/MP4 Media Files
- Displays IP Cameras' Genuine Resolution
- PTZ Control Supporting 30+ Protocols (Incl. PELCO-P, PELCO-D, Samsung)
- Audio In, Supports Record / Save Audio
- Features LED Lamp, Calculators, Music Players and Other Application Tools
- 7.4 V / 2400mA Lithium Ion Polymer Battery with 8 hr. Life (4~5 Charging hrs.)
- DC12V / 3A Power Out: Temporary Power Supply
- DC48V PoE Power Output (Max. Power 24W)
- Package Includes: Tester, Adaptor, Battery, Tool Bag, DC12V Power Cable, BNC Cable, RS485 Cable, Audio Cable
- 3-Year Warranty

SPECIFICATIONS

LCD Display	4-Inch IPS Touch Screen , 800*480 Resolution
CVBS	1 Channel BNC Input, NTSC/PAL (Auto adapt) PTZ Control, RS485 control, Baud 600-115200bps, compatible w/ 30+ protocols (PELCO-D/P, Samsung, Panasonic)
IP Test 4K/H.265/H.264	IP Discov. / Quick ONVIF / IPC Test / RTSP Play / Client APK
IP Camera Rapid Video	Automatically View Video, Create Testing Report
Coaxial HD Test	8MP [4K] TVI, CVI, AHD 3840 x 2160 (15fps), Control over COAX, OSD menu
Zoom Image	Zoom, Screen Snapshot, Record, Save, View, Record+Playback
Network Test	Link Monitor, Port Flashing, Ping Test
Audio Test	1 Ch. Audio Signal Input, Test for Sound Function, 1 Ch. Audio Signal (Headphone Connection)
Data Monitor	Captures / Analyze Command Data from Controlling Device + Can Send Hexadecimal
Drop-Down Menu (All Interfaces)	Select PoE Power Switch, IP Setting, CVBS, LAN, Info
Operation Languages	English, Chinese, Korean, Russian, Italian, French, Polish, Spanish, Japanese
Auto-Off	1-30 (mins)
Battery	Built-in 7.4V Lithium Polymer Battery, 2400mA, 8 hr. Working Period, 4~5 hr. Charging Period
Power (12V / 3A power)	Output DC12V / 3A Power Out: Temporary Power Supply
Power (PoE Output)	48V PoE Power Output, Max Power 24W
External Power Supply	DC 12V/1A
Working Temperature	14~122F (-10 ~ 50C)
Working Humidity	30% - 90% (Recommended)
Dimension / Weight	4.96 x 3.27 x 1.3" (126 x 83 x 33mm) / 7lbs (3.2kg)



FUNCTIONALITY

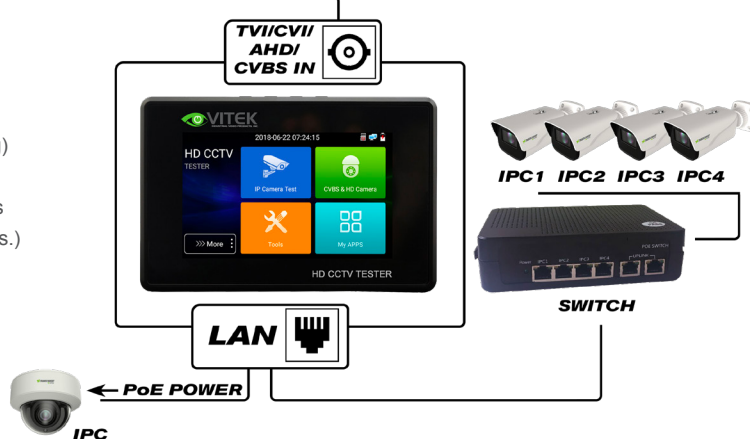

ONVIF

(888) VITEK-70 | WWW.VITEKCCCTV.COM
28492 Constellation Road Valencia, CA 91355

**An Eye On
Innovation**