

VTM-TLM22B

Transcendent 22" 1080P LED Professional Security Monitor with 2ea Composite BNC In / 1ea BNC Out, HDMI, & VGA Inputs



REAR CONNECTIONS



2 x BNC IN with 1 x BNC OUT (Looping), Plus HDMI, VGA, Audio IN / OUT, & ISP / USB Service Port.

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

TRANSCENDENT



TRANSCENDENT



22-INCH PANEL



2 x BNC IN + 1 x
BNC OUT



AUDIO IN / OUT



HDMI INPUT



VGA



NDA COMPLIANT

A PROFESSIONAL SECURITY MONITOR DESIGNED AND BUILT TO SUPPORT VITEK'S HIGHEST QUALITY INDUSTRIAL VIDEO PRODUCTS

Complete your security system with this cost-effective VITEK Transcendent Series NDA Compliant Professional Grade HD Security Monitor. This 22" 16:9 backlit LED display is designed for 24/7 continuous use in critical security applications. Features a 50,000+ hour panel life with Dynamic Optimization, Natural Color, Contrast & Detail Enhancement, and more!

KEY FEATURES

- 22" TFT-LED Display with 16:9 Aspect Ratio
- 1080P Resolution (1920x1080)
- 2x BNC Inputs with 1x BNC Output (Looping), 1 x HDMI, VGA, Audio IN/OUT
- Integrated Speakers
- Super Slim Design
- 5ms Response Time
- 178° / 178° Horizontal and Vertical Viewing Angle
- NDA Compliant
- 3 Year Warranty

An Eye On
Innovation



VITEK, IVP Inc. offers a full range of NDA Compliant IP and HD COAX cameras, recorders and accessories, including point-to-multi-point wifi bridges, monitors, testers and more. See vitekccv.com for the full product line-up and more info.


www.vitekccv.com



SPECIFICATIONS

Panel Type	22" 16:9 TFT-LED Backlit Monitor
Active Display Area	18.77"(W) × 10.56" (H) / 476.64mm × 268.11mm
Resolution	1920 × 1080
Display Mode	16:9
Pixel Pitch	0.248(H) × 0.248(V)
Contrast Ratio	10,000:1
Brightness	300 cd/m ²
Response Time	5ms
Colors	16.7M
Viewing Angle (H/V)	178°/178°
Inputs / OUTPUTS	2 × BNC (BNC In / Out) + 1 × HDMI + 1 × VGA + 1 × ISP / USB Service Port + Audio In / Out
Speakers	2 × 3W (Stereo)
Features	3D Comb Filter + Video Noise Reduction
Power consumption	<25W
VESA Mounting	VESA 100mm × 100mm
Auto adjustment	Yes
OSD Control	Yes - Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, Phase, Color, Language
Panel Life	50,000 Hours
Working Temp	32~104°F (0~40°C)
OSD Language	English, Spanish, French, Korean, Chinese
NDAA Compliant	YES
Accessories	Power Cord, Power Adapter, Stand, Quick Start Guide
Dimensions / Weight	Without Stand: 20.01" × 12.04" × 1.86" (508.35 × 305.93 × 47.2mm / 7.72lb / 3.5k

DIMENSIONS

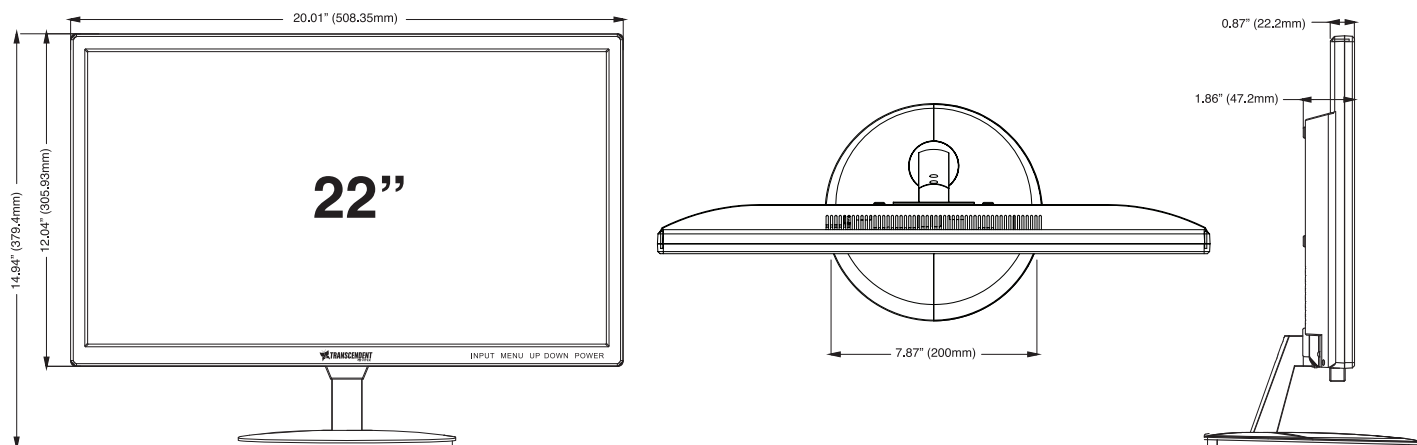

OPTIONAL ACCESSORIES

VT-LCD/PMT
LCD Monitor Swivel Pole



VT-LCD/WMT-R
Rotating LCD Wall Mount



An Eye On
Innovation

 **TRANSCENDENT**
www.vitekccv.com

