


RG-6/U 60% Dual Shield Riser (CMR) Coaxial Cable

Cable Detail



Approval

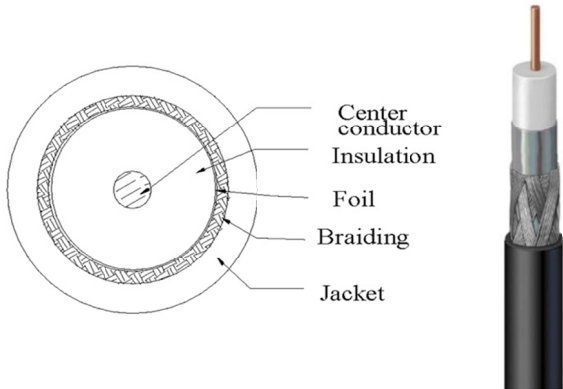

Applicable Standards

- RG-6/U 60% CMR CATV 75 Ω Coaxial Cable
- Reference Standard
SCTE IPS-SP-001 / UL 1655, UL 13, UL 444, ROHS

Physical Characteristics

Conductor	Solid	Copper Clad Steel
AWG		18
Diameter	(inches)	0.040
Insulation Material		Foam PE
Nominal Thickness	(inches)	0.073
Insulation Diameter	(inches)	0.186
Braid Shield		Aluminum
Coverage Area	(%)	60
Braid Diameter	(inches)	0.213
Jacket Material		PVC
Nominal Thickness	(inches)	0.2716
Cable Diameter	(inches)	0.0295
Nominal Weight	500 ft.	16 lbs.
	1000 ft.	30 lbs.

Electrical Characteristics

Temperature Rating	-20 to 60 ($^{\circ}$ C)
Impedance	75 ($\pm$ 3.0 Ohms)
Capacitance	15.5 (pF/ft.)
Conductor DCR@20 $^{\circ}$ C	28.6 (ohms/1000ft)
Velocity of Propagation	84 (%)
RoHS Compliant	Yes

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
5	2.66	550	16.70
55	5.25	600	17.52
211	10.10	750	19.69
250	11.02	870	21.33
270	11.48	1000	22.97
300	12.14	1250	25.00
350	13.15	1450	26.37
400	14.11	2200	31.16
450	15.03	2400	32.83
500	15.88	3000	37.88

Cable Marking

RG6/U 18AWG CMR FT4 XXXXXX VERIFIED TO C(ETL)US
CATV SWEPT TO 3.0 GHZ ****FT

Part Numbers	Jacket Color	Package
RG6URBK4-500	Black	500ft / Pullbox
RG6URBK4	Black	1000ft / Pullbox
RG6URBK2	Black	1000ft / Reel
RG6URWH4-500	White	500ft / Pullbox
RG6URWH4	White	1000ft / Pullbox
RG6URWH2	White	1000ft / Reel