



Tripod Screen

Installation

1. Rotate the blue locking mechanism and then raise the telescopic frame.



2. Pull up the top of the telescopic frame so the locking pin is visible. Once done tighten the locking mechanism.




3. Unfold the tripod stand and rotate the screen as shown in the picture below



4. Pull the screen up and hang on top of the top of the frame



5. Pull up the blue locking lever then push the handle down into place, as illustrated in the pictures below.

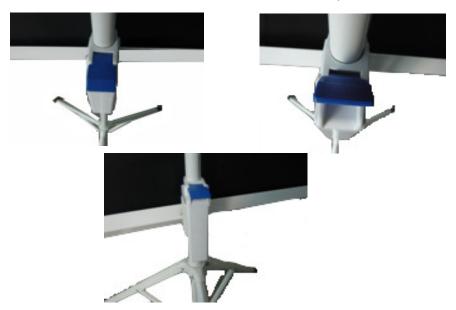

6. To change the height of the Homegear Tripod Screen loosen the blue locking mechanism on the telescopic frame and adjust accordingly.





USA

www.shop247.com

Suite 110-120 16 Sunset Way

Henderson, Nevada 89014

Telephone: 1-800-603-0004