




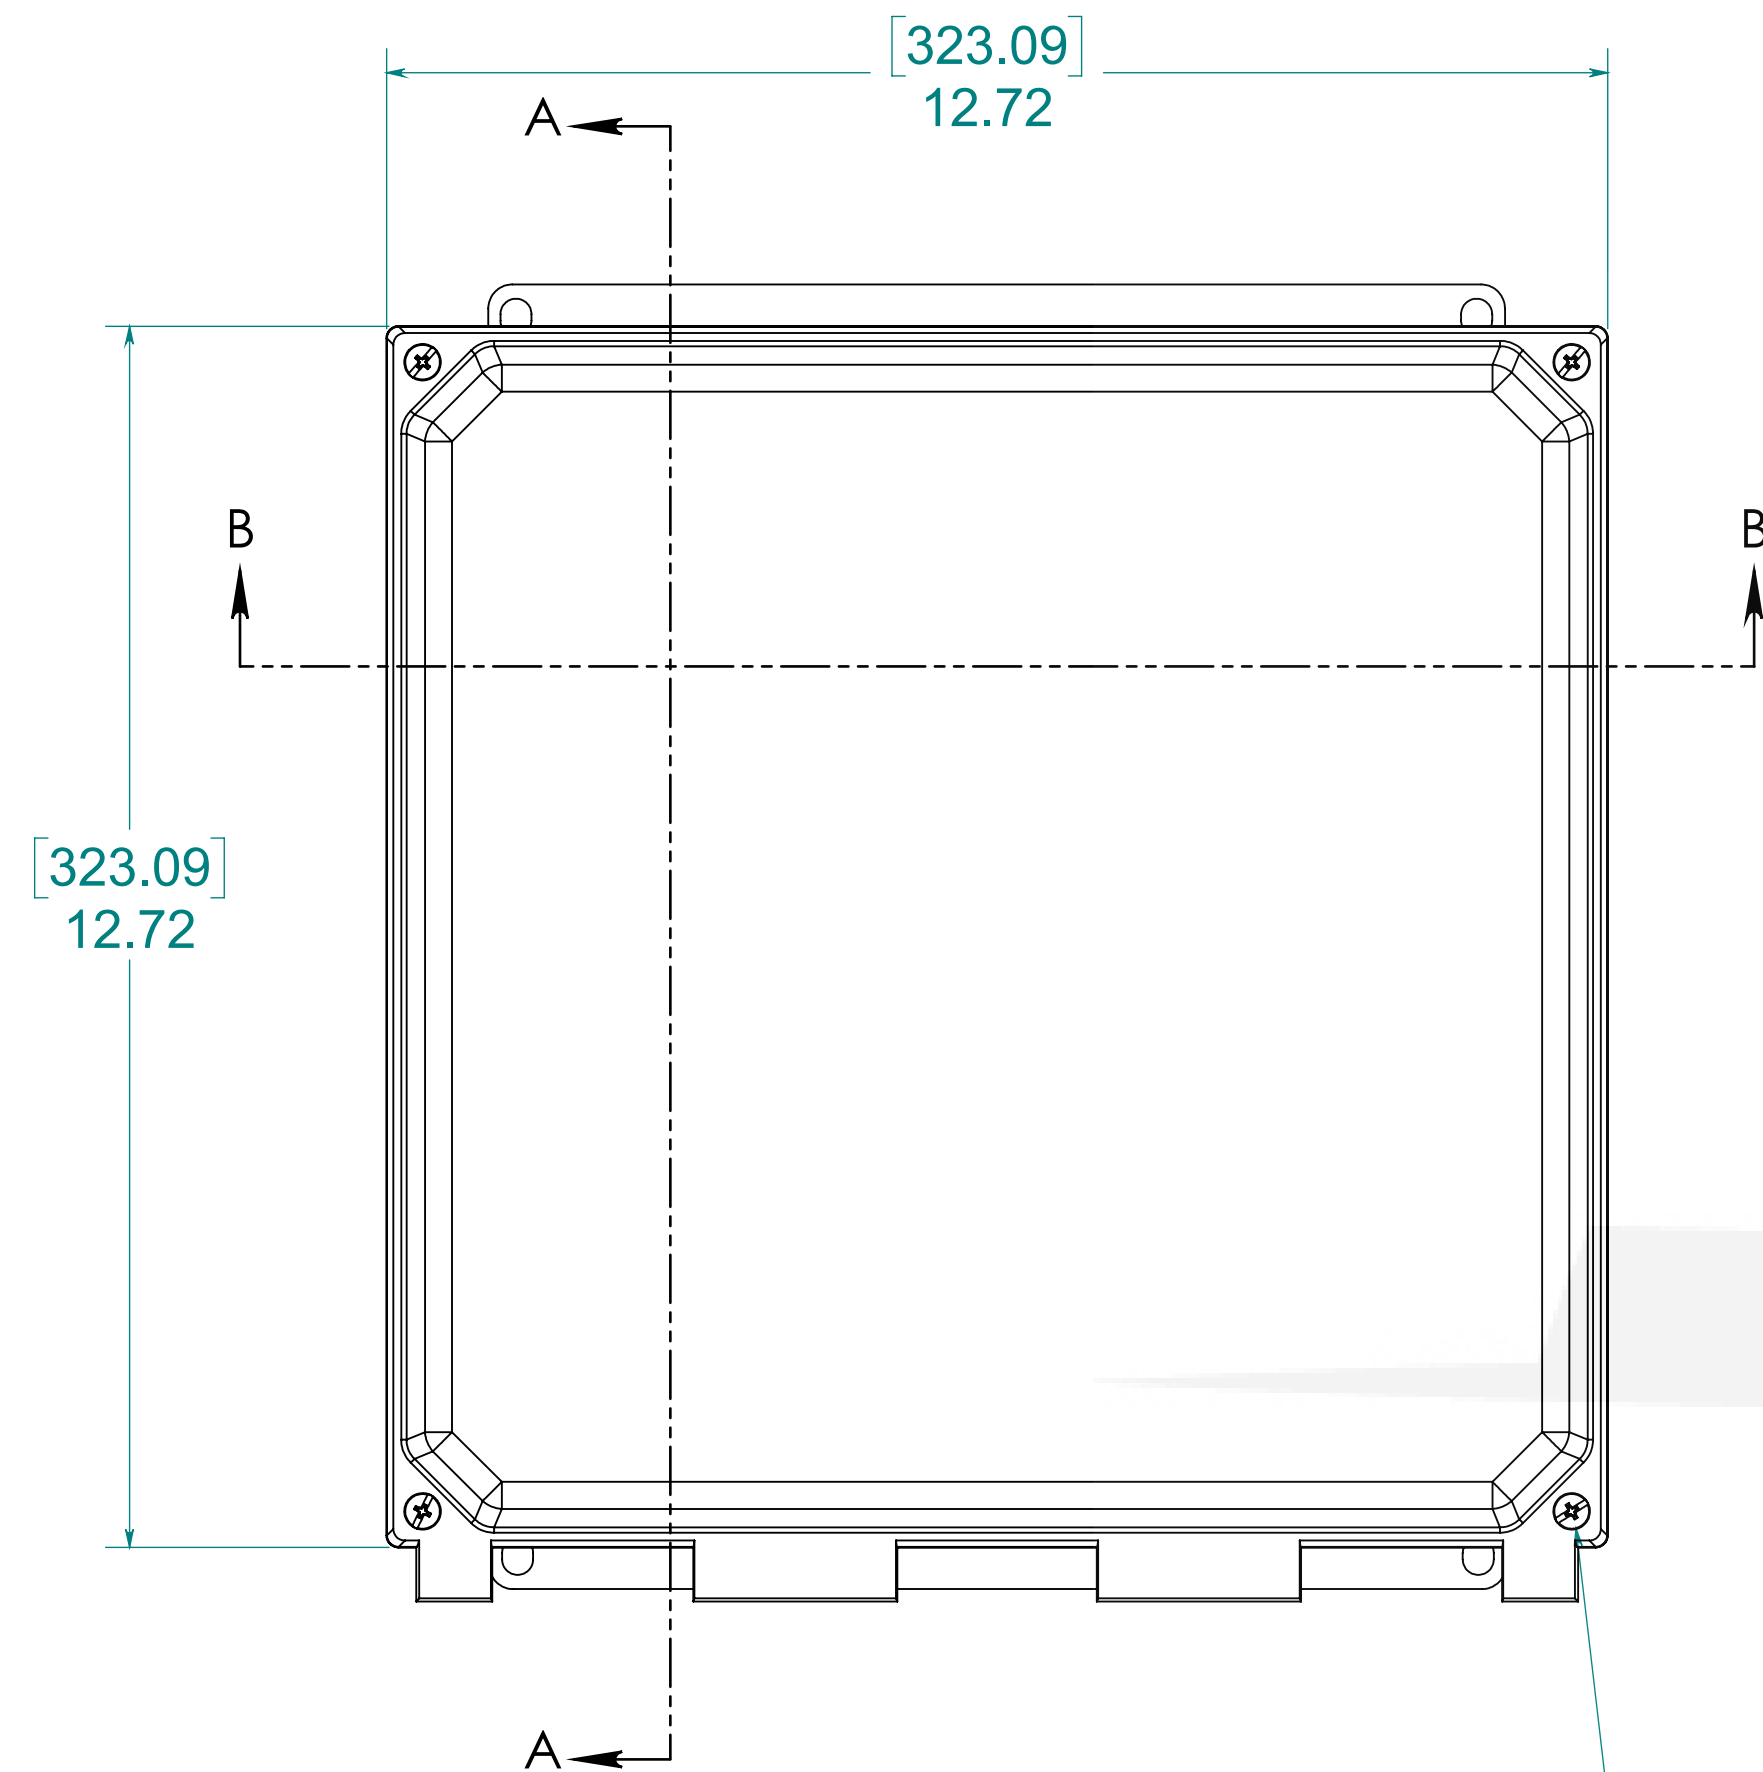

(4X) EACH #10-32 BRASS INSERTS AND 316 STAINLESS STEEL CAPTIVE COVER SCREWS

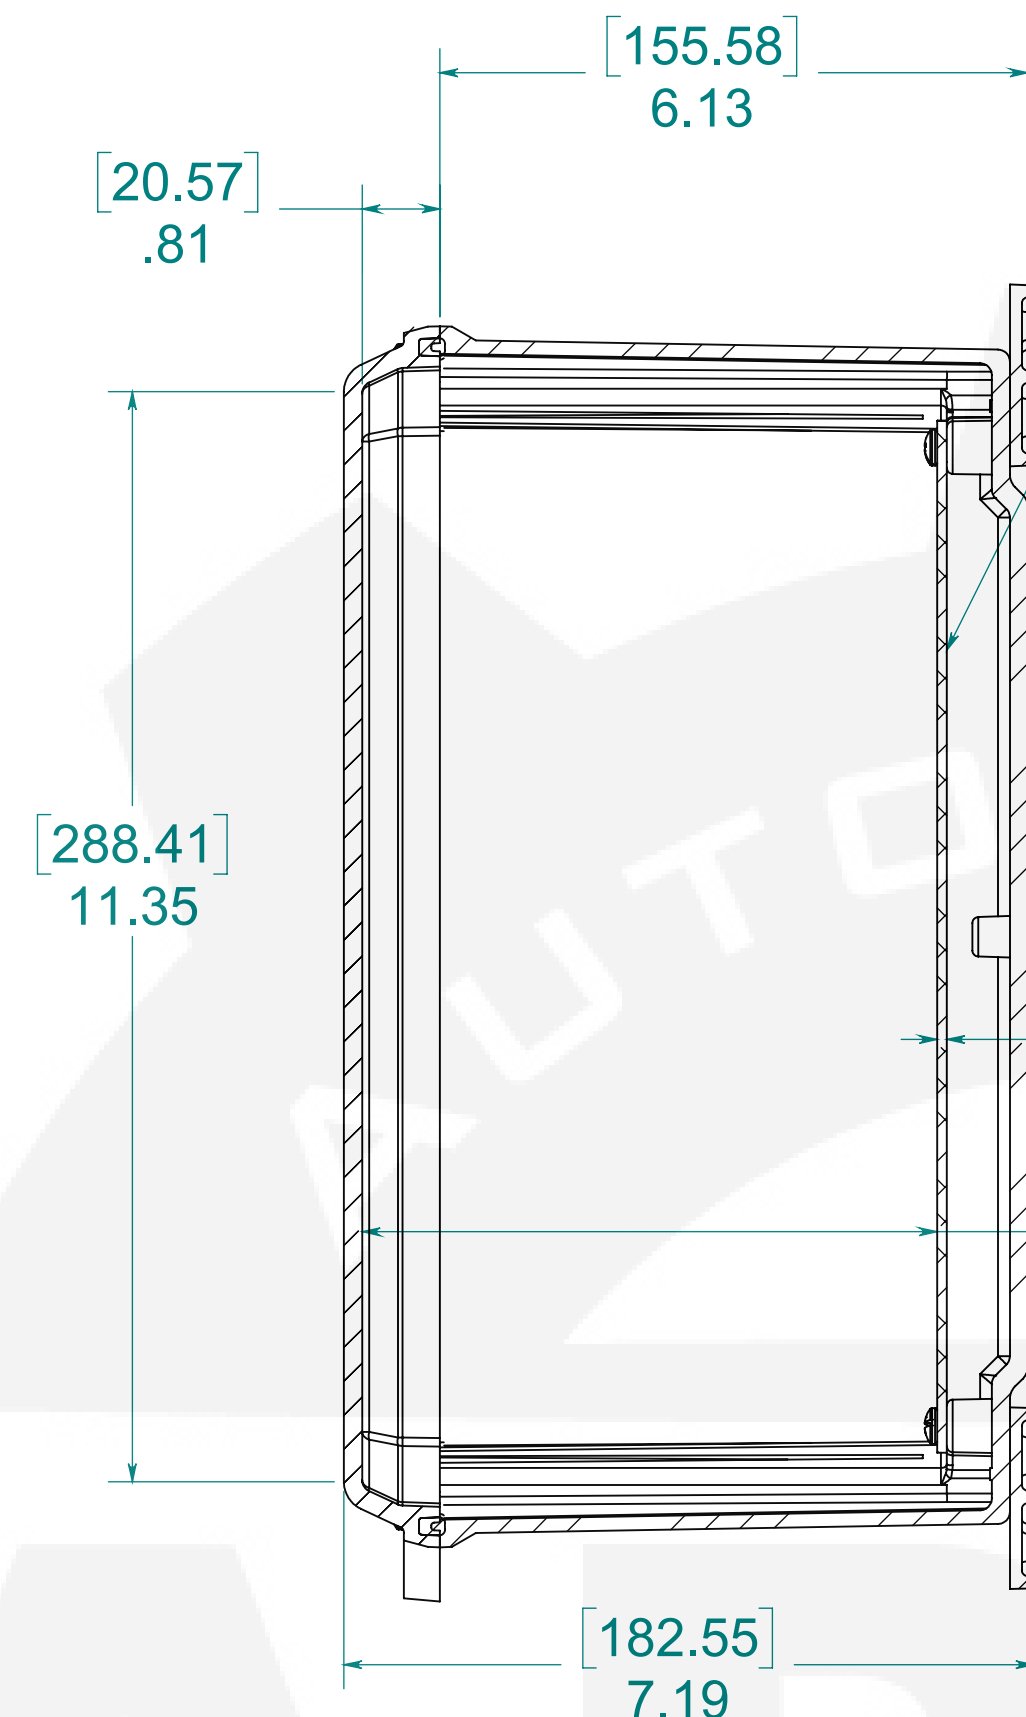

SECTION A-A

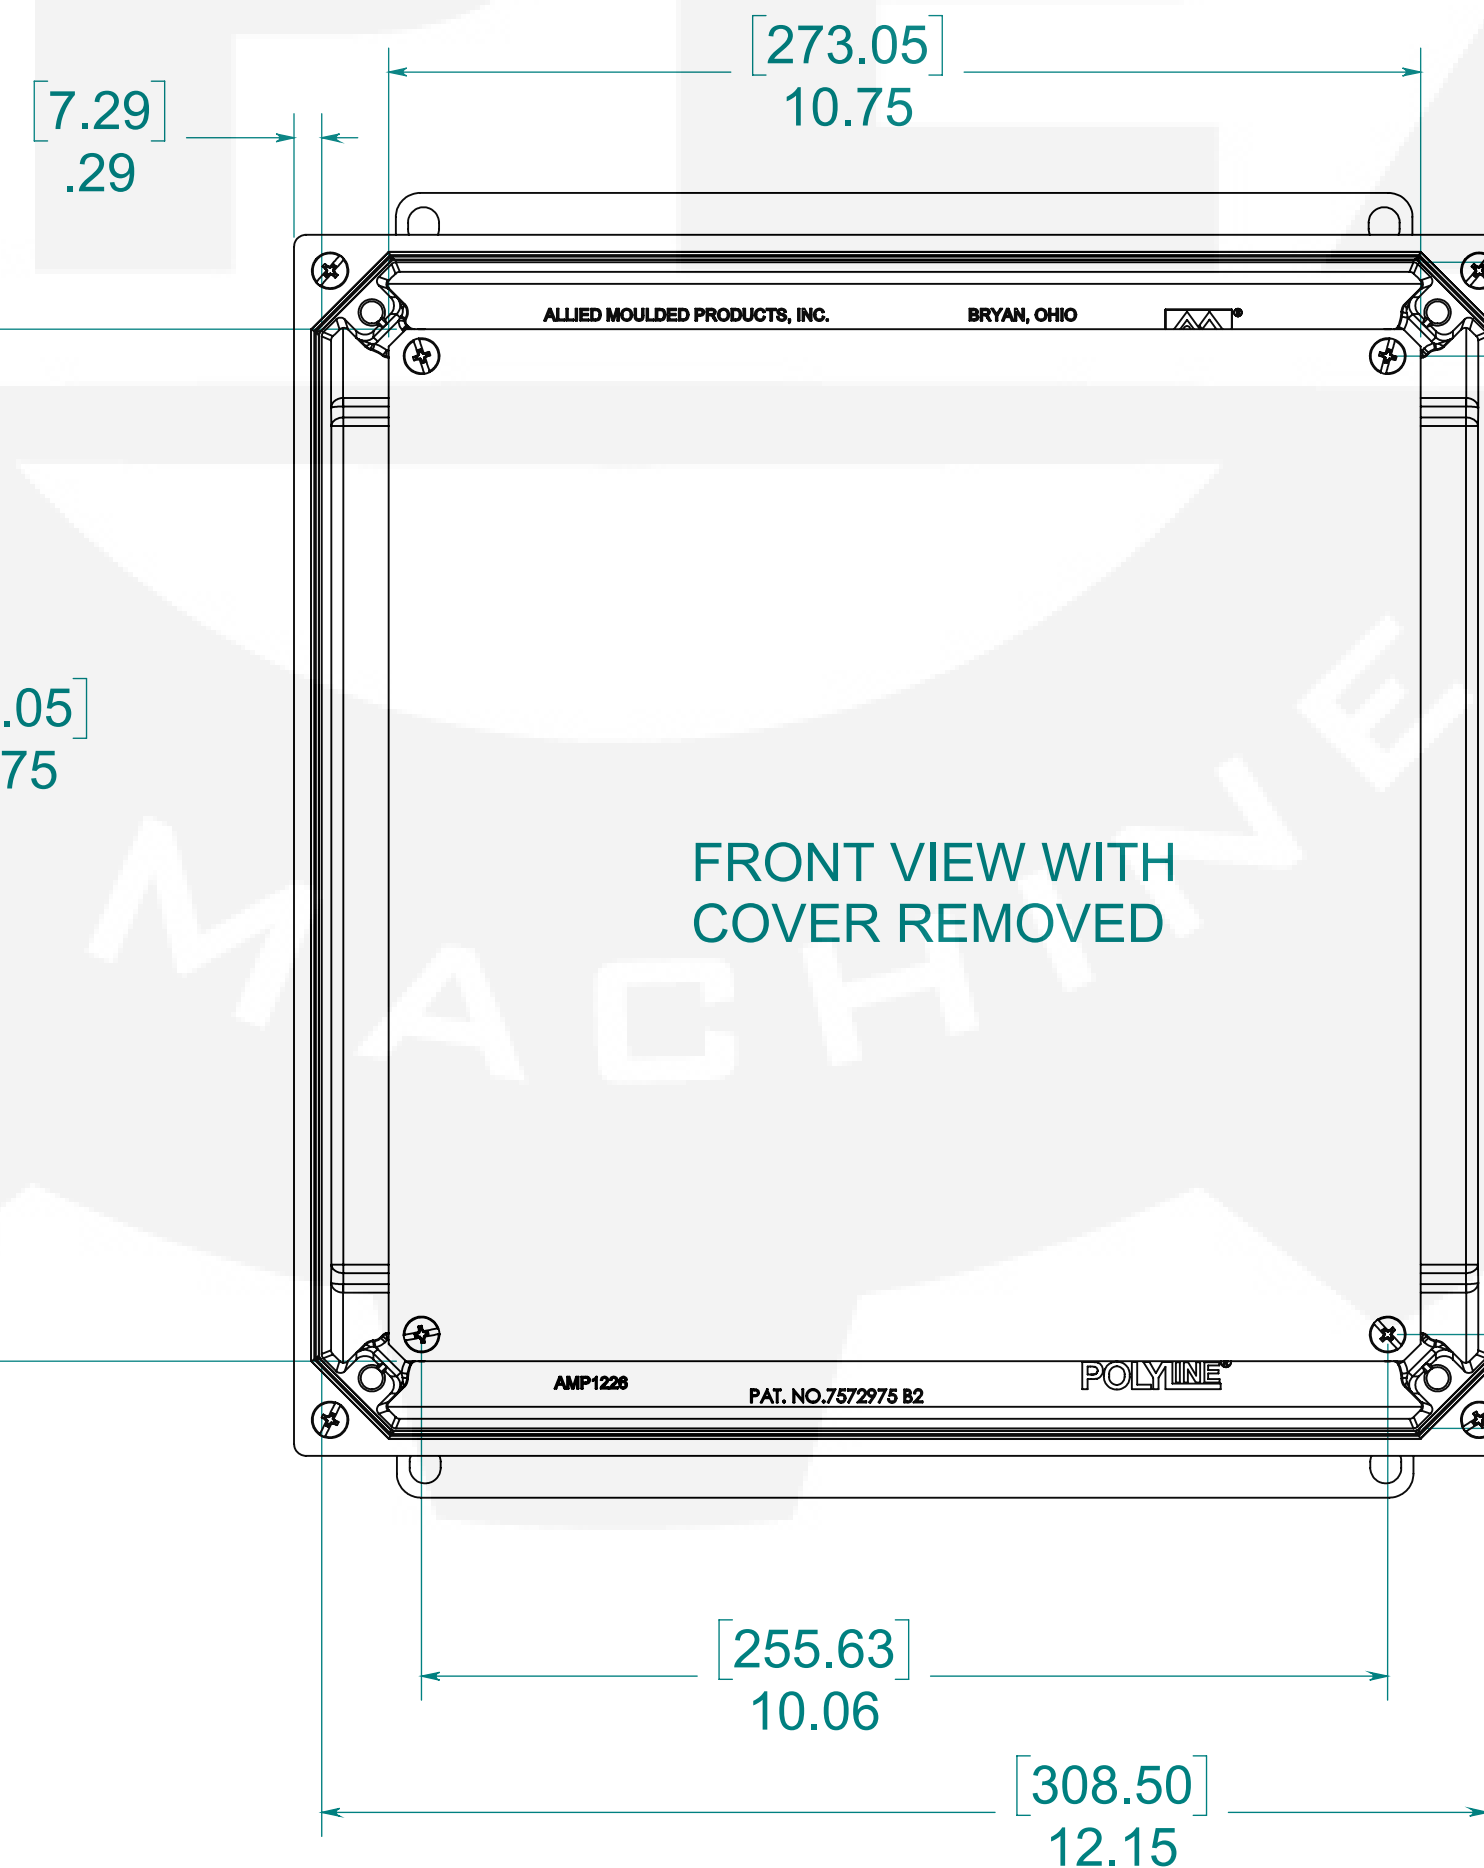


FRONT VIEW WITH COVER REMOVED

345.19 [13.59]


329.44 [12.97]  
MAX SLOT DISTANCE

326.14 [12.84]  
MIN SLOT DISTANCE

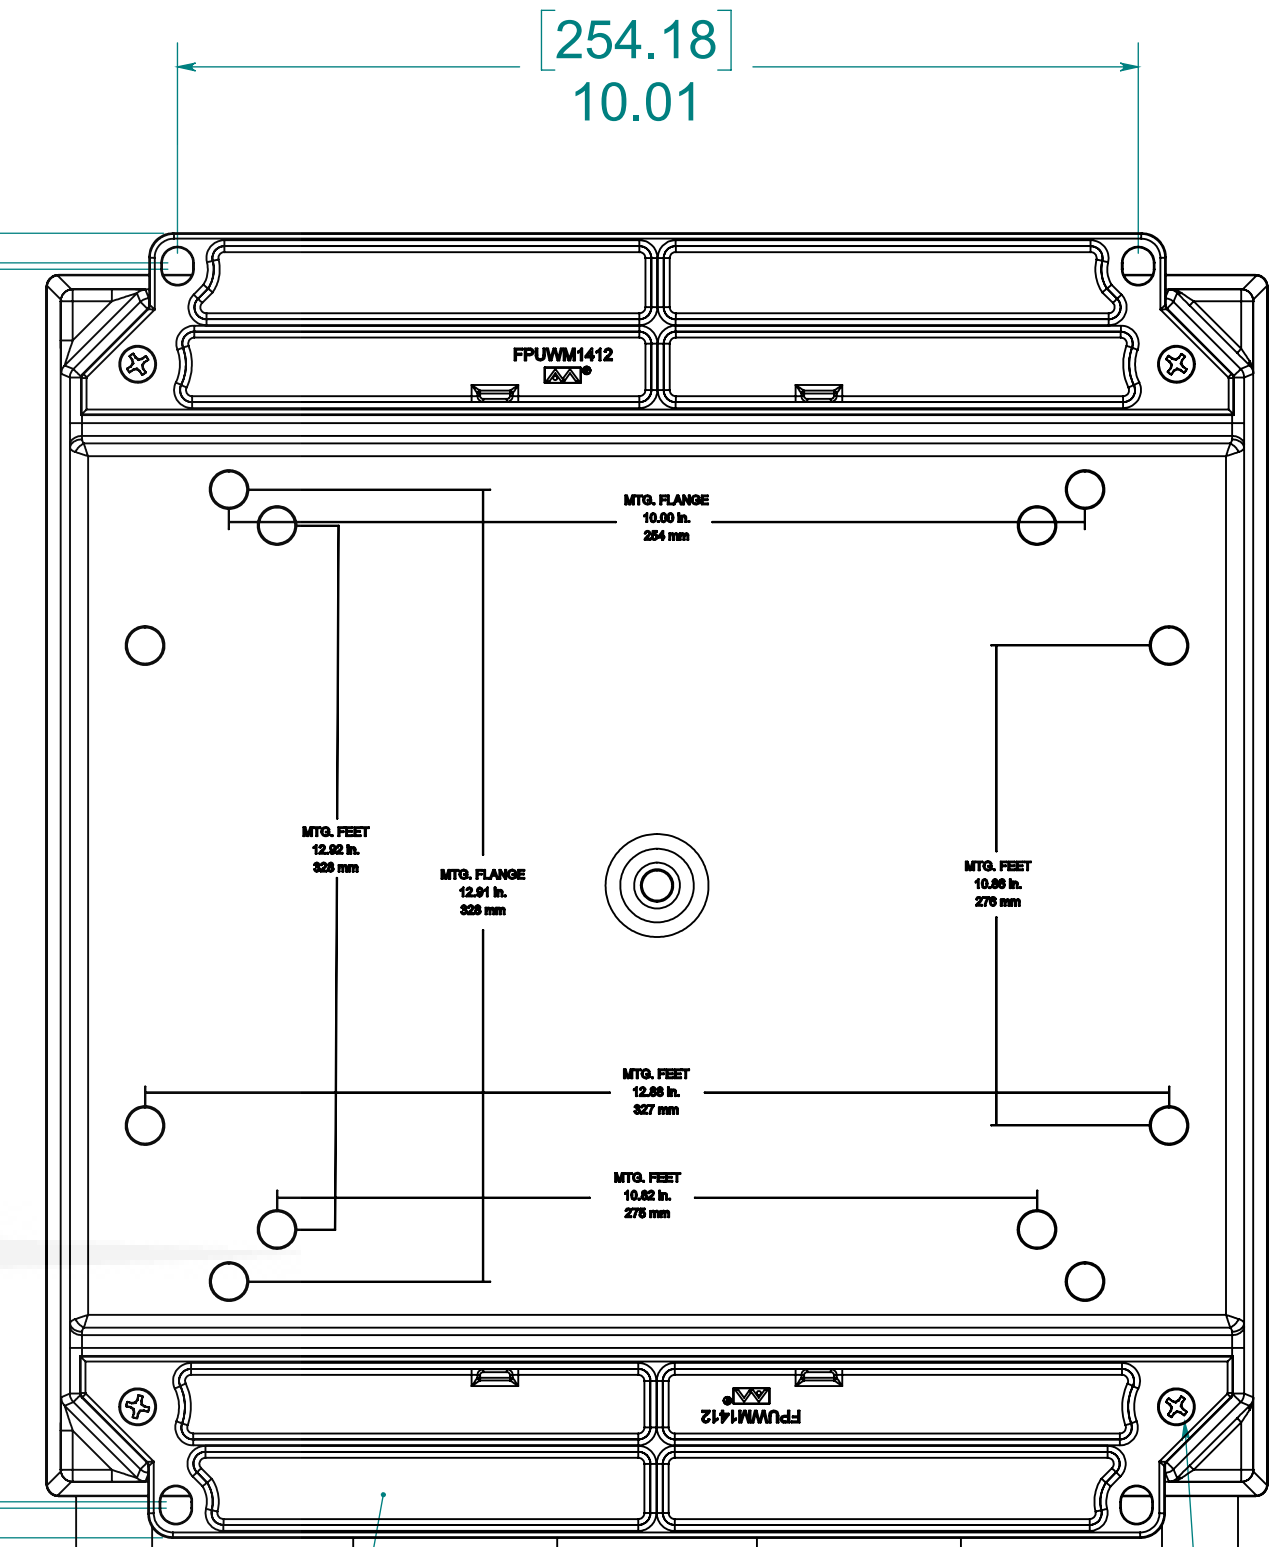

(2X) POLYCARBONATE FLANGE

(4X) EACH #10-32 BRASS INSERTS AND 316 STAINLESS STEEL FLANGE SCREWS

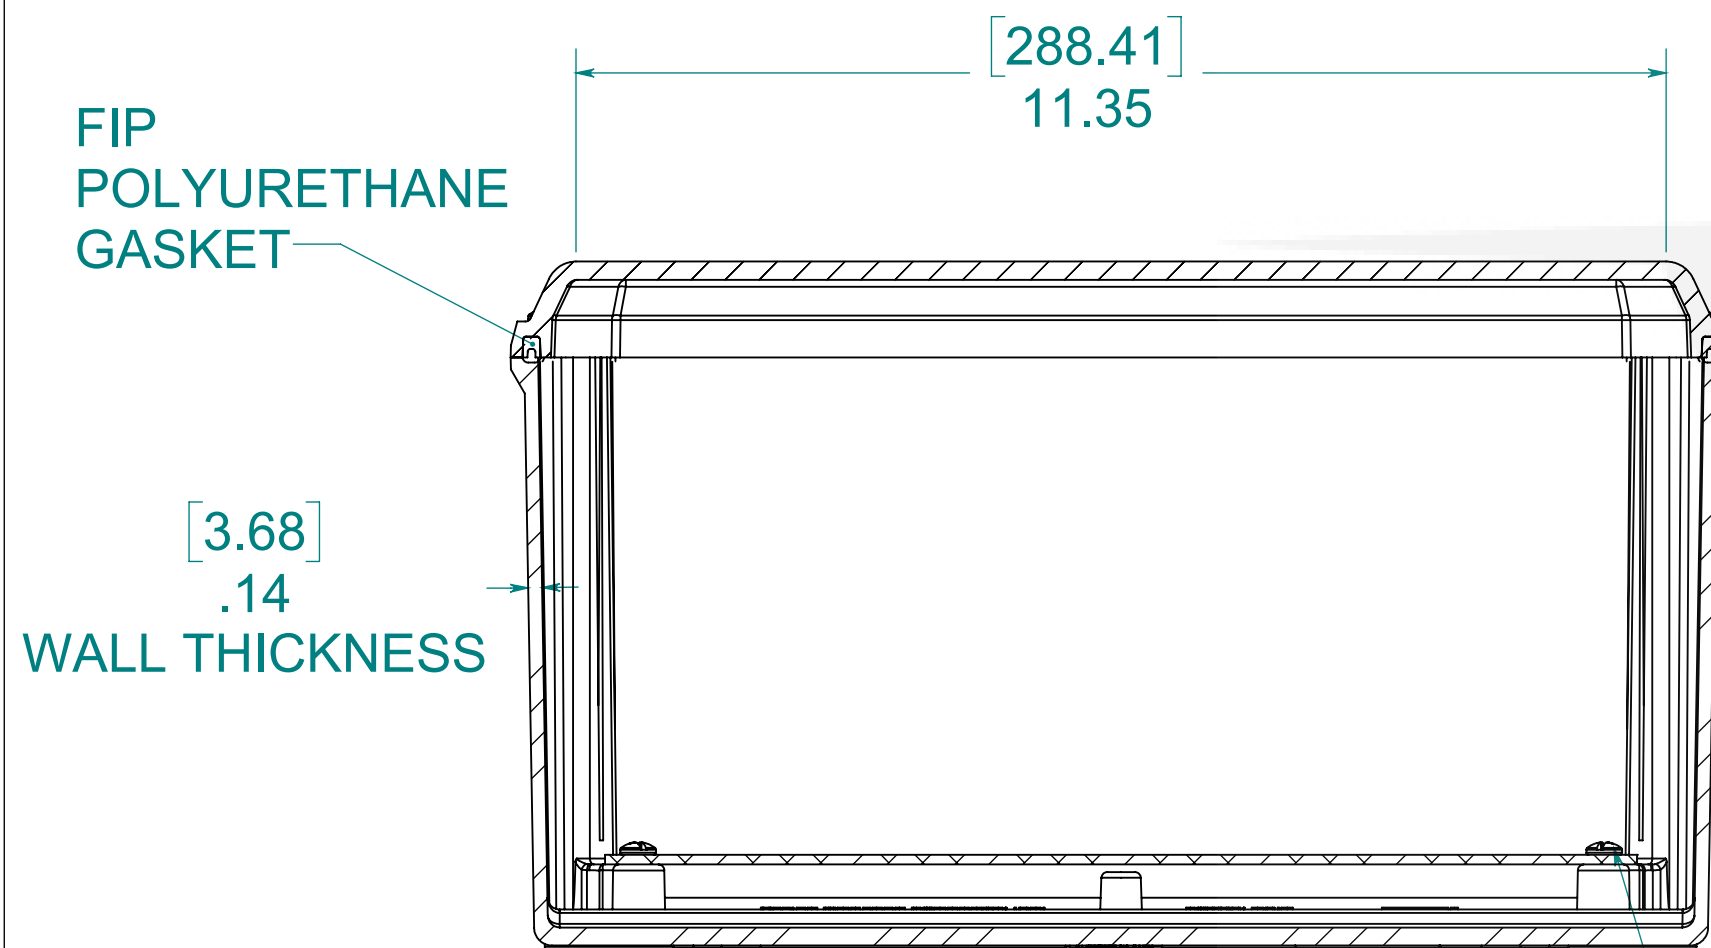


SECTION B-B

(4X) EACH #10-32 BRASS INSERTS AND PLATED CARBON STEEL SCREWS

MATERIAL:  
BOX- INJECTED POLYCARBONATE  
STANDARD COVER- INJECTED POLYCARBONATE  
CLEAR COVER- INJECTED POLYCARBONATE

NOTE:  
1. DATA SUBJECT TO CHANGE WITHOUT NOTICE

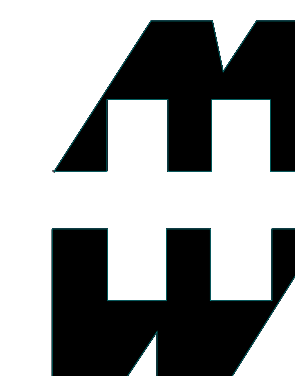

PART No. PCJ12126CCF

for more information visit  
[www.hammfg.com](http://www.hammfg.com)  
Data subject to change without notice  
Drawing Not to Scale