



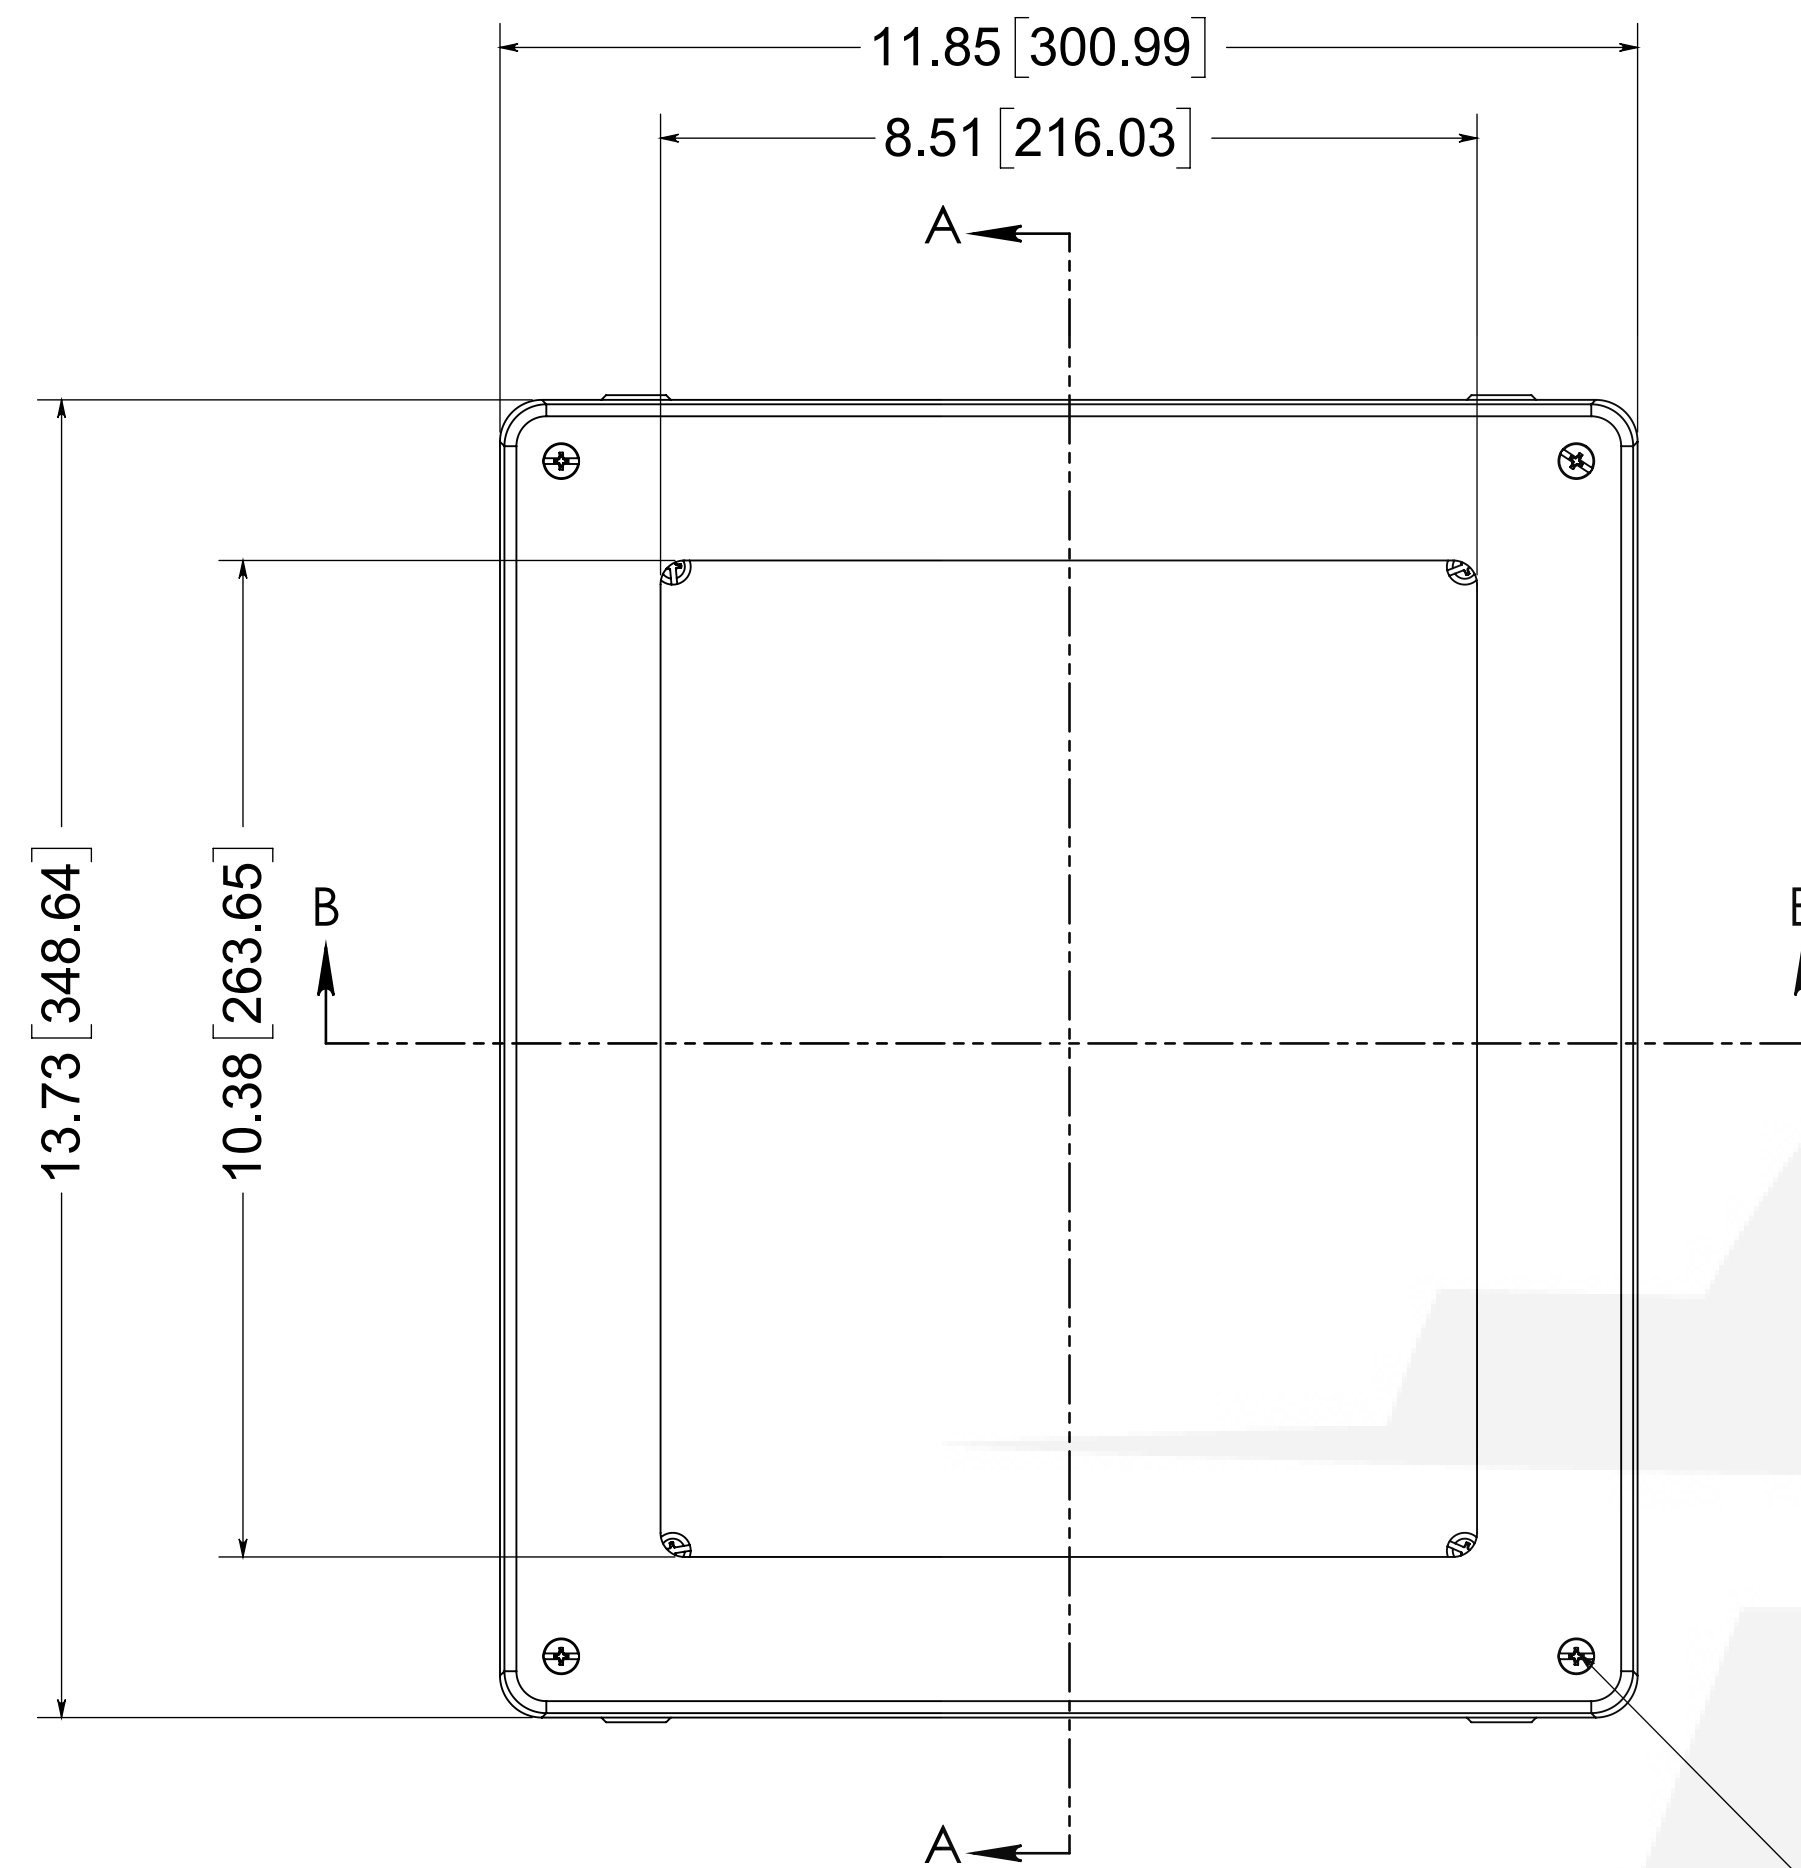

(4) EACH #10-32 BRASS INSERTS AND 316 STAINLESS STEEL CAPTIVE COVER SCREWS WITH RETAINING O-RING

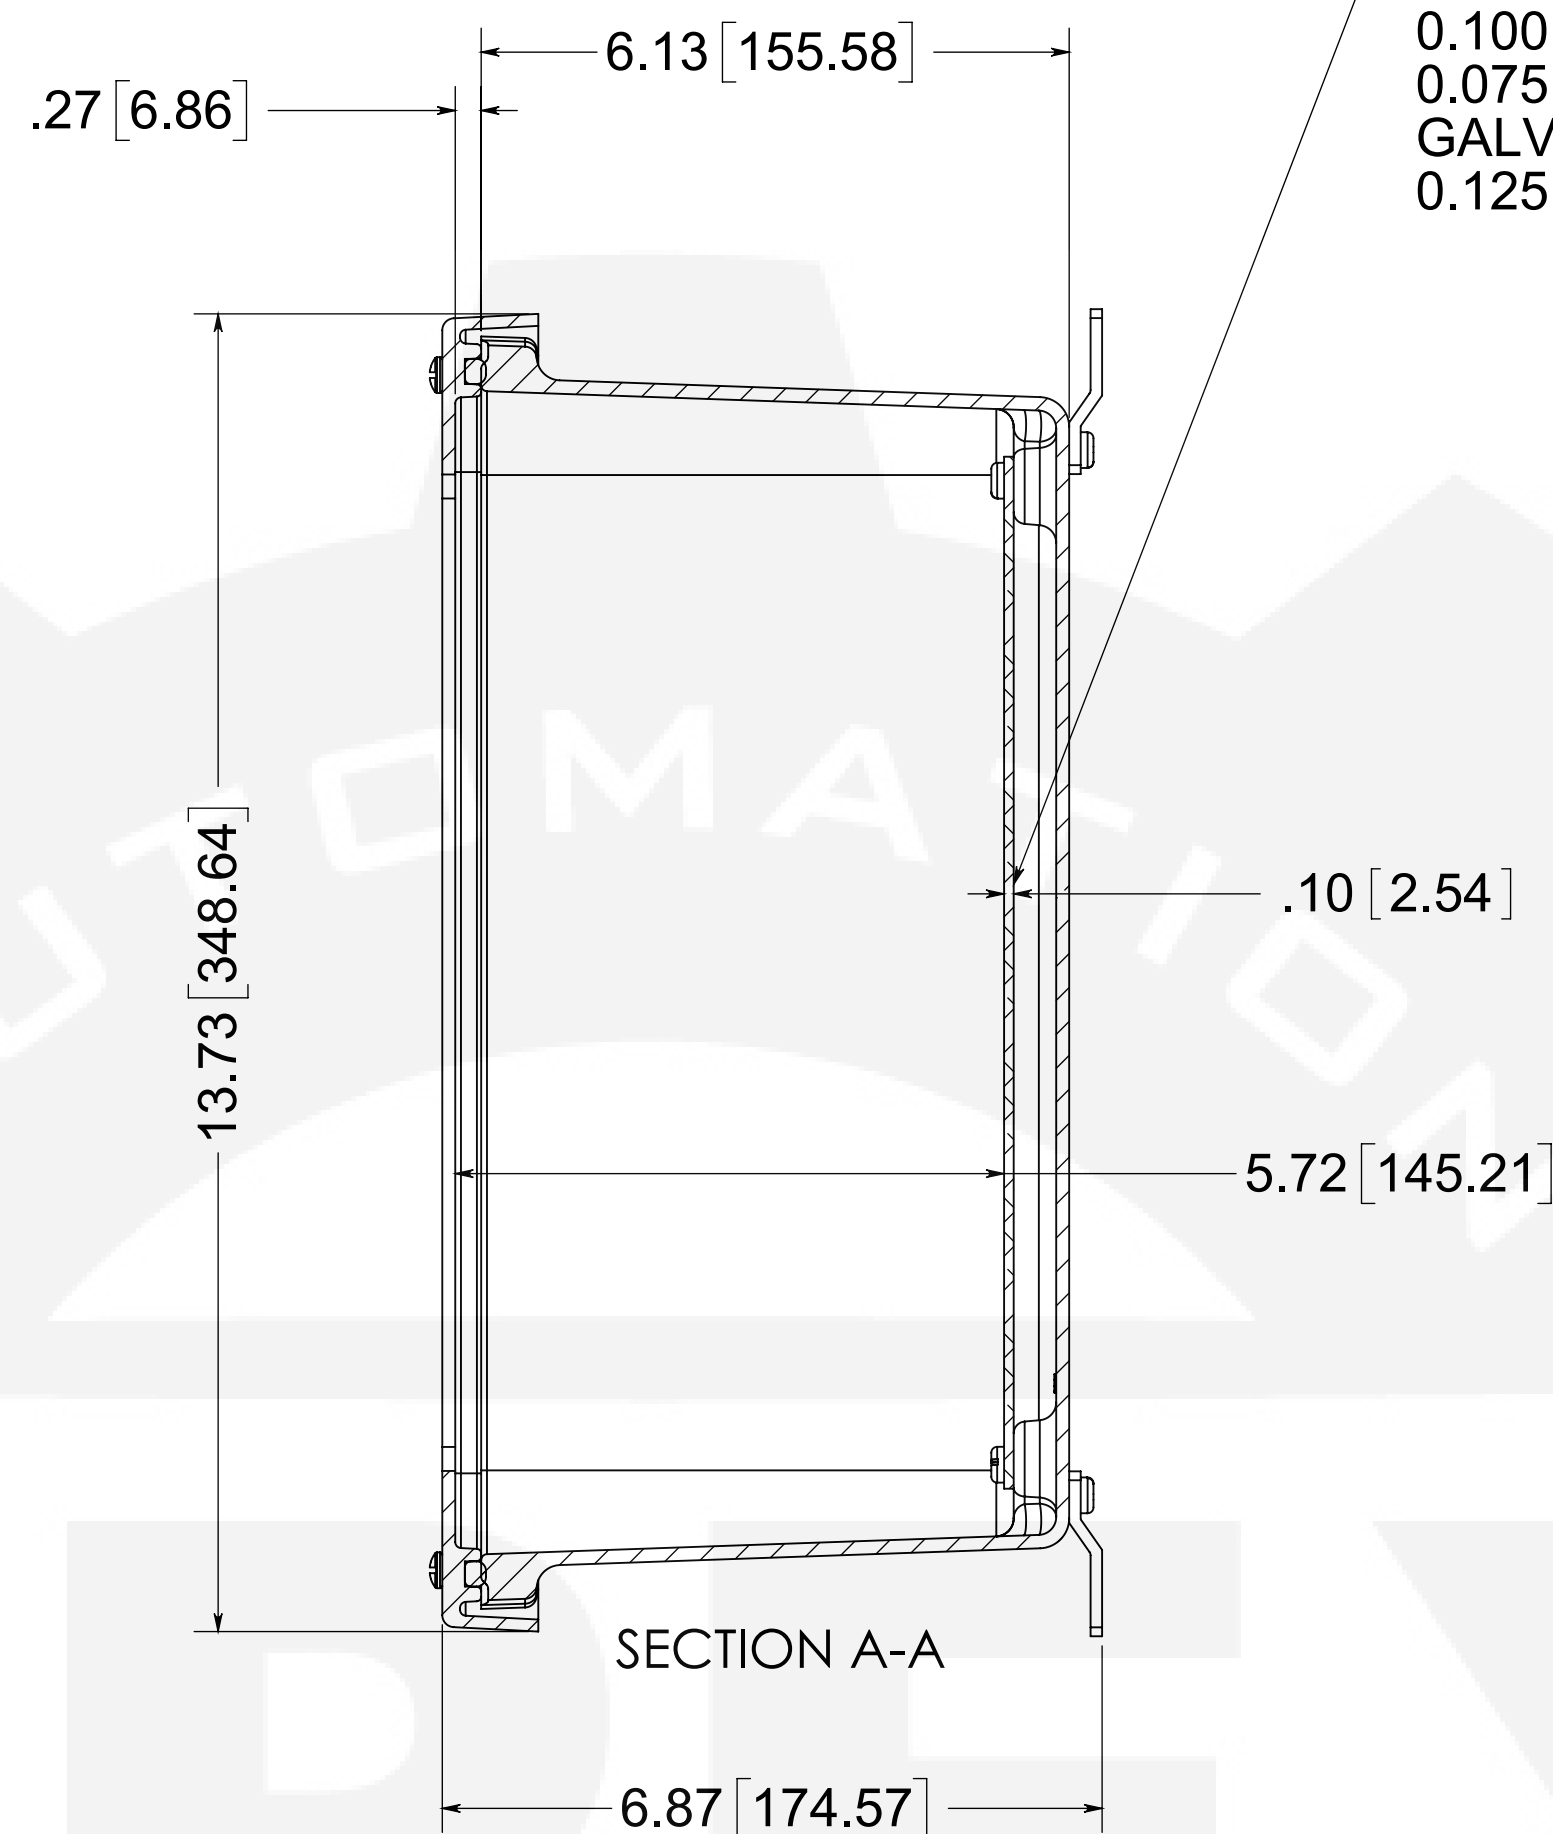


(4X) 316 STAINLESS STEEL FEET

(4X) EACH #10-32 BRASS INSERTS, AND 316 STAINLESS STEEL FEET SCREWS


FIP POLYURETHANE GASKET

.14 [3.55] WALL THICKNESS

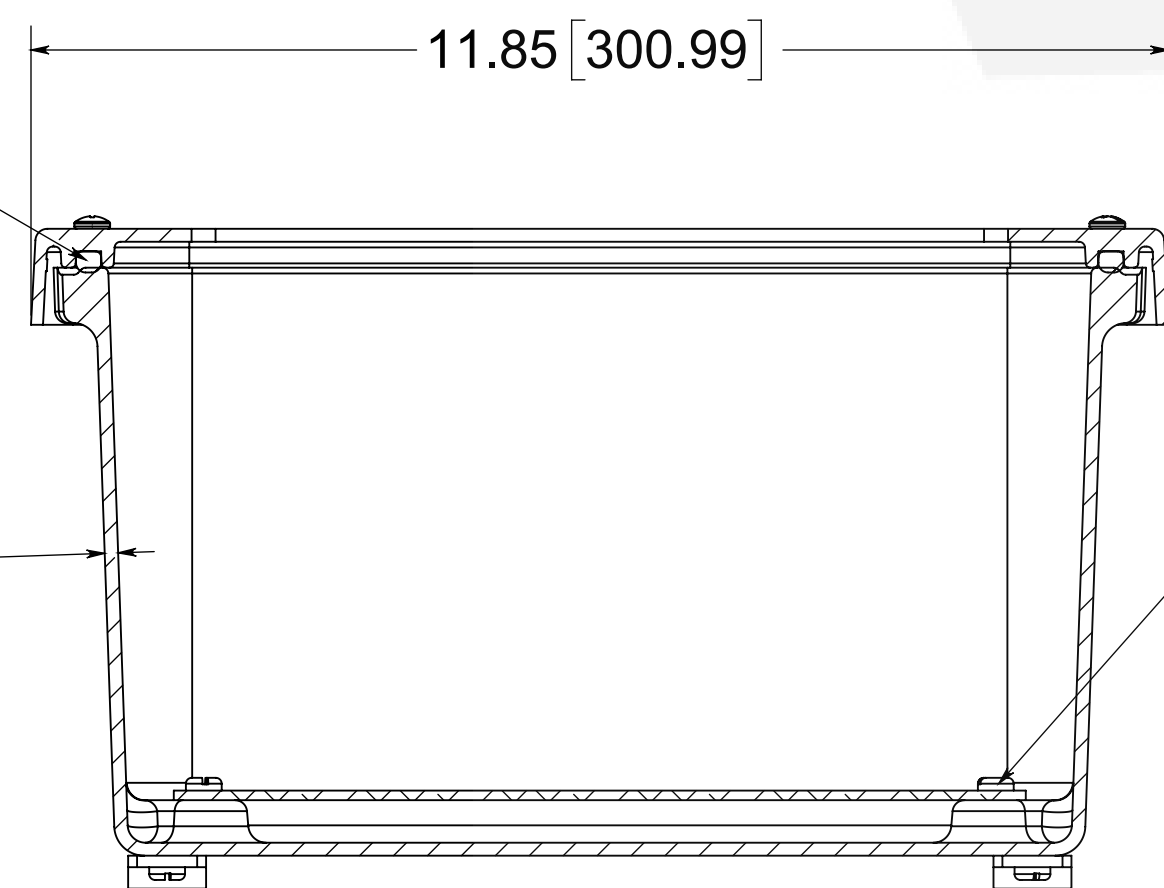


SECTION B-B

MATERIAL
BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOWS- POLYCARBONATE

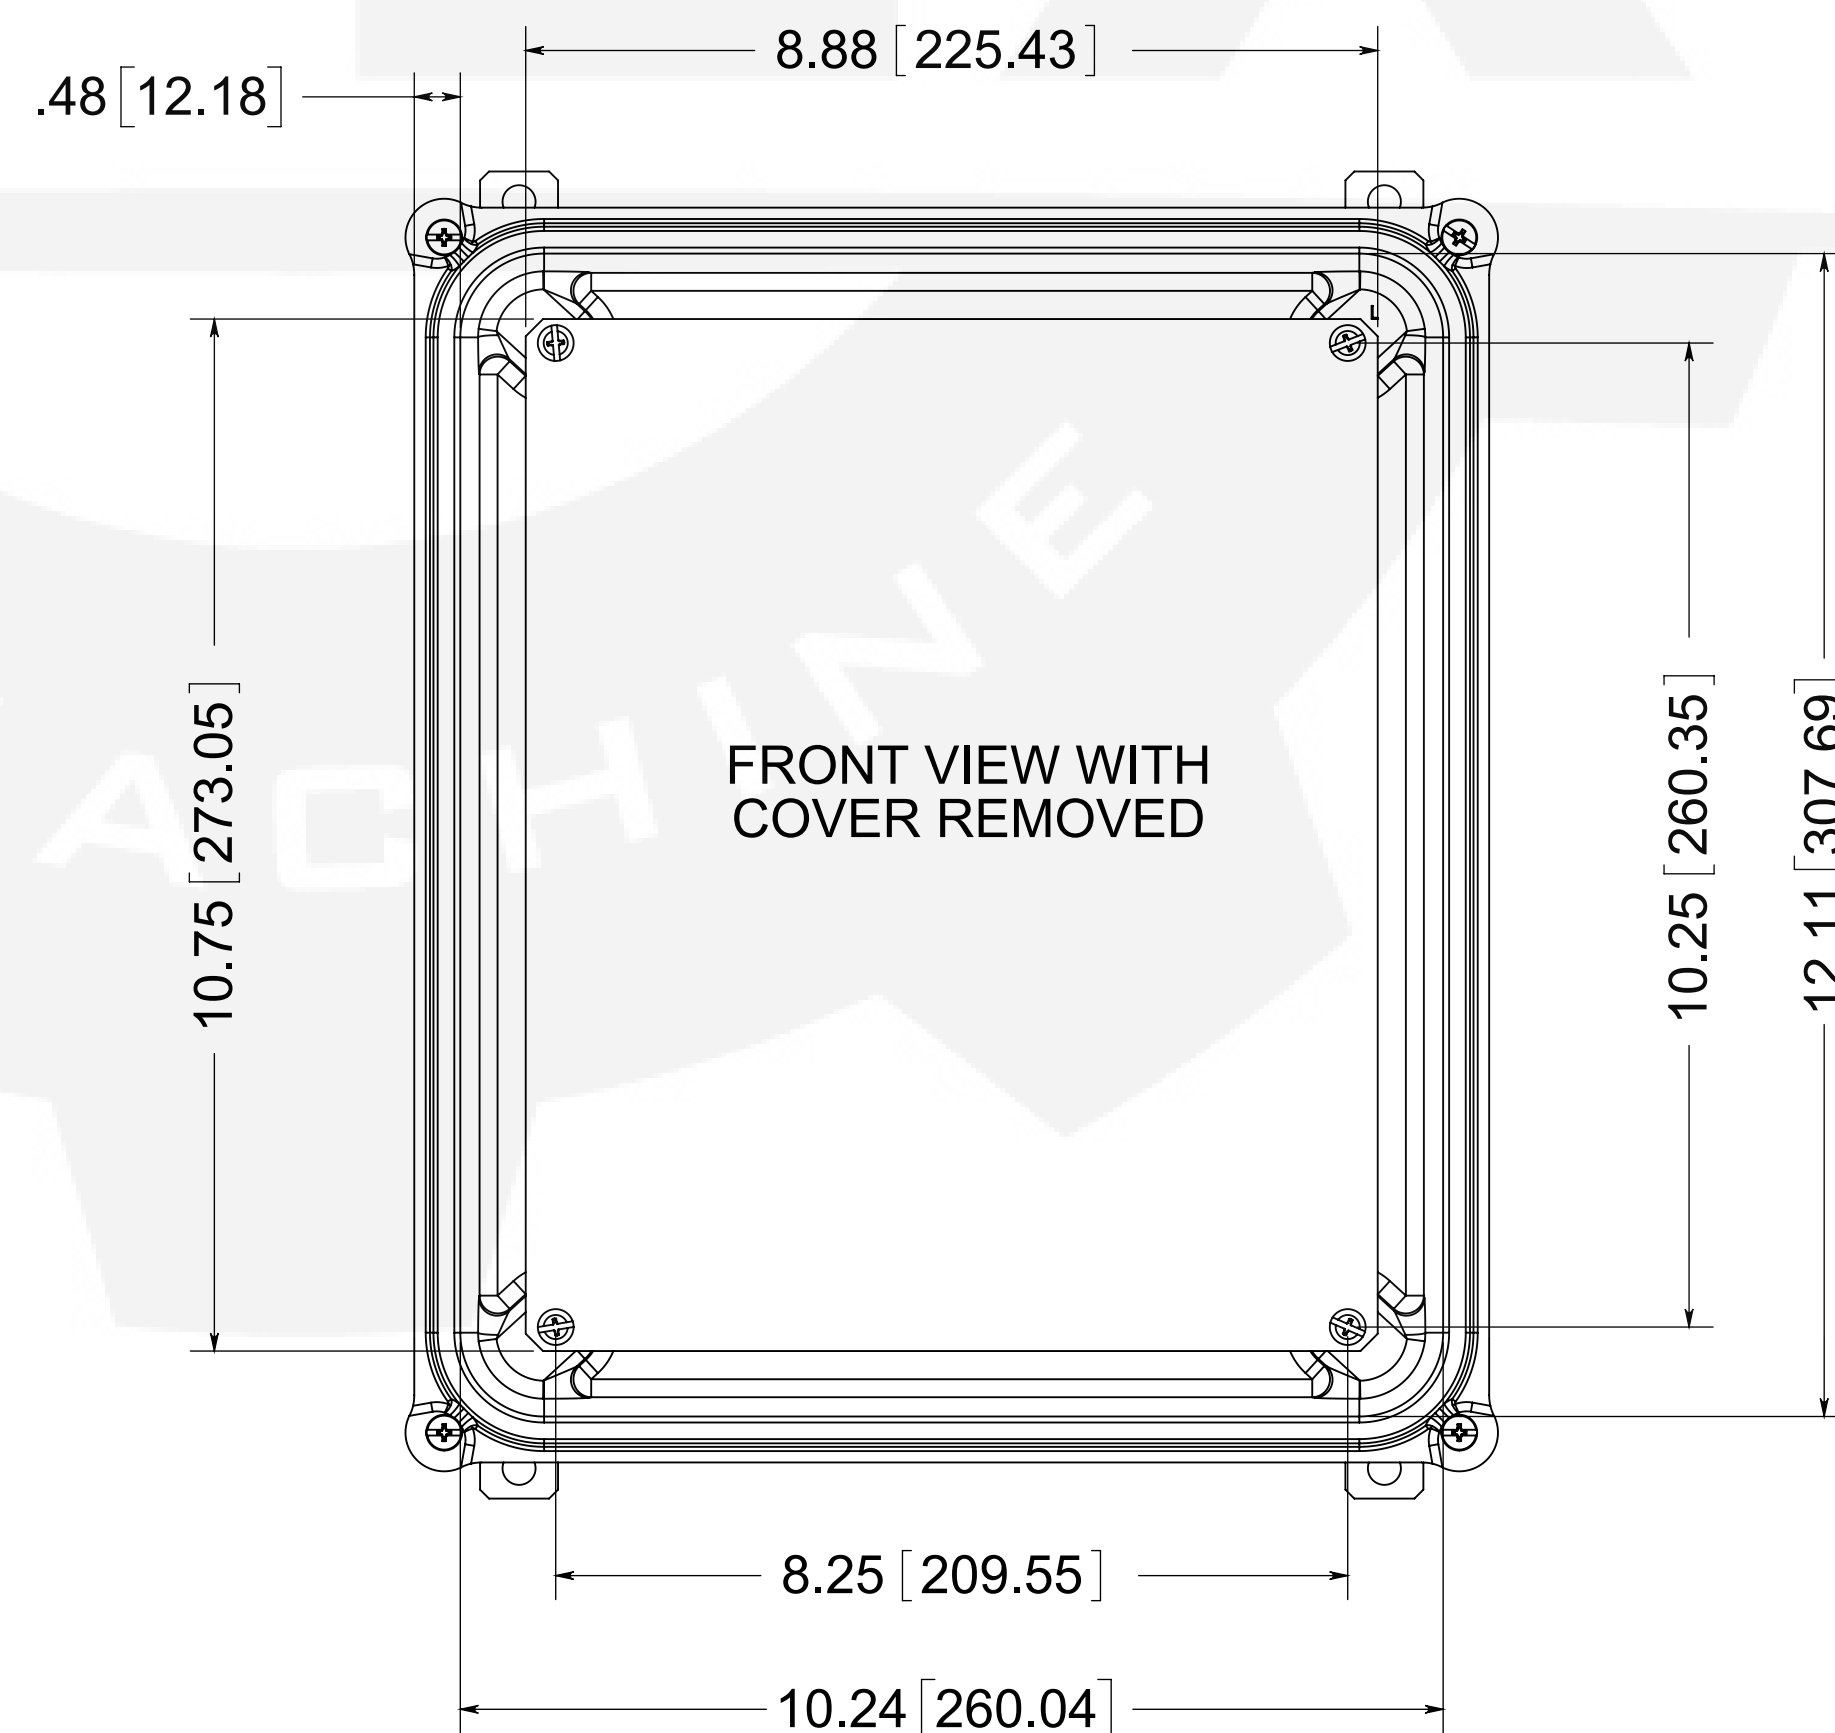

FRONT VIEW WITH COVER REMOVED

NOTES:
1. DATA SUBJECT TO CHANGE WITHOUT NOTICE

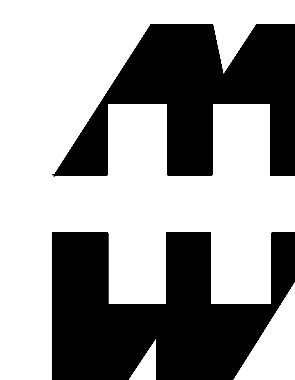

PART No. PJ12106W
for more information visit
www.hammfg.com
Data subject to change without notice
Drawing Not to Scale