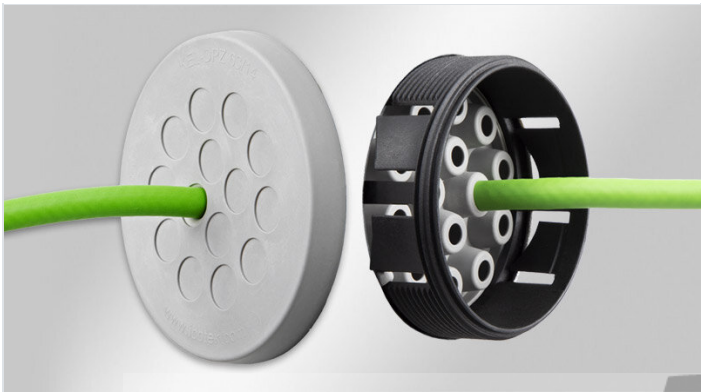


KEL-DPZ-CLICK multi-membrane cable entry plates

for snap-in mounting, M25 - M63 / IP65 / IP66 / IP68



KEL-DPZ-CLICK cable entry plates are designed to route and seal cables without connectors or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The new variant of the proven cable entry plate KEL-DPZ is snapped into the cut-out directly from the front. This significantly reduces the assembly time. Alternatively, the new variant can be fastened with a locknut. The KEL-DPZ-CLICK series have a thread to fit in metric cut-outs from M25 to M63. Thus cut-outs for metric cable glands can be used.

Snapped into the cut-out:

For wall thickness 1 – 2.5 mm
Protection IP65

Fixed with a locknut:

For max. wall thickness 11 mm
Protection IP66 / IP68

The assembly of the KEL-DPZ-CLICK with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ-CLICK provides strain relief and protection IP65 / IP66 / IP68 (certified acc. to EN 60529).

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

IP54

IP67

REACH COMPLIANT

IP55

IP68

ECOLAB certified

Made in Germany

IP64

UV ISO 4892-2A

IP65

PNEUMATICS

IP66

RoHS compliant

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66, IP67, IP68
Material	Elastomer Base frame: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Fasten with locknut, Snap-in

Advantages & Benefits

- Fast mounting
- Offers two mounting types: Snap-in and locknut fixation
- High cable density
- Certified protection classes IP65/IP66/IP68 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Suitable for metric cut-outs
- Hygienic design - free of dirt-collecting recesses


Product types & Sizes

	KEL-DPZ-CLICK 25/3 gy	Part No.	44050	Mounting height	8 mm
		EAN	4251269323065	Cut-out size, round	25,3 mm
		PU	10	Cut-out size, metric	M25
		For max. no. of cables	3	Thread	M25 x 1,5
		Color	grau (ähnlich RAL 7035)	Thread length	20 mm
		Height	28 mm	Suitable locknut	52284
		External diameter	39 mm	Clamping range	2 x 3.2 - 5.2 mm 1 x 3.2 - 6.5 mm

KEL-DPZ-CLICK 25|4 gy


Part No. **44051**
 EAN **4251269323072**
 PU **10**
 For max. no. of cables **4**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **39 mm**

Mounting height **8 mm**
 Cut-out size, round **25,3 mm**
 Cut-out size, metric **M25**
 Thread **M25 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52284**
 Clamping range **4 x 3.2 - 5.2 mm**

KEL-DPZ-CLICK 32|4 gy


Part No. **44052**
 EAN **4251269323089**
 PU **10**
 For max. no. of cables **4**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **44 mm**

Mounting height **8 mm**
 Cut-out size, round **32,3 mm**
 Cut-out size, metric **M32**
 Thread **M32 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52285**
 Clamping range **3 x 3.2 - 6.5 mm**
1 x 7.2 - 12.5 mm

KEL-DPZ-CLICK 32|4-2 gy


Part No. **44053**
 EAN **4251269323096**
 PU **10**
 For max. no. of cables **4**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **44 mm**

Mounting height **8 mm**
 Cut-out size, round **32,3 mm**
 Cut-out size, metric **M32**
 Thread **M32 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52285**
 Clamping range **4 x 5 - 9.5 mm**

KEL-DPZ-CLICK 32|7 gy


Part No. **44054**
 EAN **4251269323102**
 PU **10**
 For max. no. of cables **7**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **44 mm**

Mounting height **8 mm**
 Cut-out size, round **32,3 mm**
 Cut-out size, metric **M32**
 Thread **M32 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52285**
 Clamping range **7 x 3.2 - 6.5 mm**

KEL-DPZ-CLICK 40|8 gy


Part No. **44055**
 EAN **4251269323119**
 PU **10**
 For max. no. of cables **8**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **52 mm**

Mounting height **8 mm**
 Cut-out size, round **40,4 mm**
 Cut-out size, metric **M40**
 Thread **M40 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52286**
 Clamping range **4 x 3.2 - 6.5 mm**
4 x 5 - 10.2 mm


KEL-DPZ-CLICK 50|8 gy

Part No. **44056**
 EAN **4251269323126**
 PU **10**
 For max. no. of cables **8**
 Color **grau (ähnlich RAL 7035)**
 Height **28 mm**
 External diameter **62 mm**


Mounting height **8 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 × 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **5 x 5 - 10.2 mm**
3 x 7.2 - 12.5 mm

**KEL-DPZ-CLICK 50|10
gy**


Part No.	44057	Mounting height	8 mm
EAN	4251269323133	Cut-out size, round	50,4 mm
PU	10	Cut-out size, metric	M50
For max. no. of cables	10	Thread	M50 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
External diameter	62 mm	Clamping range	7 x 3.2 - 6.5 mm 2 x 5 - 10.2 mm 1 x 16 - 22.2 mm

**KEL-DPZ-CLICK 50|12
gy**

Part No.	44058	Mounting height	8 mm
EAN	4251269323140	Cut-out size, round	50,4 mm
PU	10	Cut-out size, metric	M50
For max. no. of cables	12	Thread	M50 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
External diameter	62 mm	Clamping range	4 x 3.2 - 6.5 mm 8 x 5 - 10.2 mm

**KEL-DPZ-CLICK 50|19
gy**

Part No.	44059	Mounting height	8 mm
EAN	4251269323157	Cut-out size, round	50,4 mm
PU	10	Cut-out size, metric	M50
For max. no. of cables	19	Thread	M50 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
External diameter	62 mm	Clamping range	19 x 3.2 - 6.5 mm

**KEL-DPZ-CLICK 50|78
gy**

Part No.	44060	Mounting height	8 mm
EAN	4251269323164	Cut-out size, round	50,4 mm
PU	10	Cut-out size, metric	M50
For max. no. of cables	78	Thread	M50 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
External diameter	62 mm	Clamping range	76 x 1.5 - 2.6 mm 2 x 2.5 - 5 mm

KEL-DPZ-CLICK 63|9 gy

Part No.	44061	Mounting height	8 mm
EAN	4251269323171	Cut-out size, round	63,4 mm
PU	10	Cut-out size, metric	M63
For max. no. of cables	9	Thread	M63 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52288
External diameter	75 mm	Clamping range	1 x 3.2 - 6.5 mm 3 x 5 - 10.2 mm 4 x 9 - 16.2 mm 1 x 16 - 22.2 mm

KEL-DPZ-CLICK 63|13
gy




Part No.	44062	Mounting height	8 mm
EAN	4251269323188	Cut-out size, round	63,4 mm
PU	10	Cut-out size, metric	M63
For max. no. of cables	13	Thread	M63 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52288
External diameter	75 mm	Clamping range	4 x 3.2 - 6.5 mm 4 x 5 - 10.2 mm 5 x 9 - 16.2 mm

KEL-DPZ-CLICK 63|14
gy



Part No.	44063	Mounting height	8 mm
EAN	4251269323195	Cut-out size, round	63,4 mm
PU	10	Cut-out size, metric	M63
For max. no. of cables	14	Thread	M63 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52288
External diameter	75 mm	Clamping range	14 x 5 - 10.2 mm

KEL-DPZ-CLICK 63|35
gy



Part No.	44064	Mounting height	8 mm
EAN	4251269323201	Cut-out size, round	63,4 mm
PU	10	Cut-out size, metric	M63
For max. no. of cables	35	Thread	M63 × 1,5
Color	grau (ähnlich RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52288
External diameter	75 mm	Clamping range	35 x 3.2 - 6.5 mm

APEX

MACHINE