

CDC 16 poles + ⊕ 16A - 250V

enclosures:
size "66.16"


page:

IL-BRID 378 - 382
CZ7 IP67, single lever 385
W-TYPE for aggressive environments 520
E-Xtreme® corrosion proof 541
EMC 577

panel supports:
COB + adaptor

page:
652 - 654

inserts, crimp connections



16A crimp contacts standard or for advanced opening silver and gold plated



STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	CDCF 16	
male inserts for male contacts	CCDM 16	
16A female contacts		
0,14-0,37 mm ² AWG 26-22 one groove	CCFA 0.3	CCFD 0.3
0,5 mm ² AWG 20 with no grooves	CCFA 0.5	CCFD 0.5
0,75 mm ² AWG 18 one groove (back side)	CCFA 0.7	CCFD 0.7
1 mm ² AWG 18 one groove	CCFA 1.0	CCFD 1.0
1,5 mm ² AWG 16 two grooves	CCFA 1.5	CCFD 1.5
2,5 mm ² AWG 14 three grooves	CCFA 2.5	CCFD 2.5
3 mm ² AWG 12 one wide groove	CCFA 3.0	CCFD 3.0
4 mm ² AWG 12 with no grooves	CCFA 4.0	CCFD 4.0
16A male contacts		
0,14-0,37 mm ² AWG 26-22 one groove	CCMA 0.3	CCMD 0.3
0,5 mm ² AWG 20 with no grooves	CCMA 0.5	CCMD 0.5
0,75 mm ² AWG 18 one groove (back side)	CCMA 0.7	CCMD 0.7
1 mm ² AWG 18 one groove	CCMA 1.0	CCMD 1.0
1,5 mm ² AWG 16 two grooves	CCMA 1.5	CCMD 1.5
2,5 mm ² AWG 14 three grooves	CCMA 2.5	CCMD 2.5
3 mm ² AWG 12 one wide groove	CCMA 3.0	CCMD 3.0
4 mm ² AWG 12 with no grooves	CCMA 4.0	CCMD 4.0
16A male crimp contacts for advanced opening		
0,5 mm ² AWG 20 with no grooves	CC 0.5 AN	* for basic or high thickness gold plating, please refer to page 675
0,75 mm ² AWG 18 one groove (back side)	CC 0.7 AN	
1 mm ² AWG 18 one groove	CC 1.0 AN	
1,5 mm ² AWG 16 two grooves	CC 1.5 AN	
2,5 mm ² AWG 14 three grooves	CC 2.5 AN	

- characteristics according to EN 61984:



16A 250V 4kV 3
16A 230/400V 4kV 2

- cULus (UL for USA and Canada),


certified

- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 G Ω
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 m Ω
- according to recommendations EUROMAP N° 13 / N° 14.1
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CDC 16 poles connector inserts
Maximum current load derating diagram

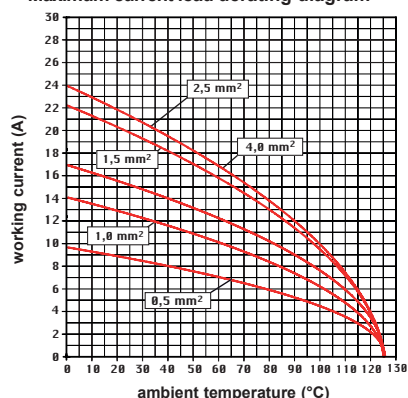


contacts side (front view)




- it is recommended to crimp the contacts with
crimping tools homologated by ILME (please see
the crimping tool section 16A contacts, CCF, CCM
and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC...AN contacts

conductor section mm ²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5