

**CH - CA - CF and MH - MA - MF C-TYPE standard version**

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

**hoods with 2 pegs****hoods with 2 pegs  
M40 cable entry with 20 mm thread length**

description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	<b>CHO 10 L</b>	16	<b>MHO 10 L20</b>	20				
with pegs, side entry			<b>MHO 10 L25</b>	25				
with pegs, side entry, high construction	<b>CAO 10 L21</b>	21	<b>MAO 10 L32</b>	32				
with pegs, side entry, high construction	<b>CAO 10 L29</b>	29	<b>MAO 10 L40</b>	40				
with pegs, side entry, high construction, without adapter <sup>1)</sup>					<b>CFO 10 L21</b>	21	<b>MFO 10 L32</b>	32
with pegs, side entry, high construction, without adapter <sup>1)</sup>					<b>CFO 10 L29</b>	29	<b>MFO 10 L40</b>	40
with pegs, top entry	<b>CHV 10 L</b>	16						
with pegs, top entry <sup>2)</sup>			<b>MHV 10 L20</b>	20				
with pegs, top entry			<b>MHV 10 L25</b>	25				
with pegs, top entry, high construction	<b>CAV 10 L21</b>	21	<b>MAV 10 L32</b>	32				
with pegs, top entry, high construction	<b>CAV 10 L29</b>	29	<b>MAV 10 L40</b>	40				
with pegs, top entry, high construction, without adapter <sup>1)</sup>					<b>CFV 10 L21</b>	21	<b>MFV 10 L32</b>	32
with pegs, top entry, high construction, without adapter <sup>1)</sup>					<b>CFV 10 L29</b>	29	<b>MFV 10 L40</b>	40

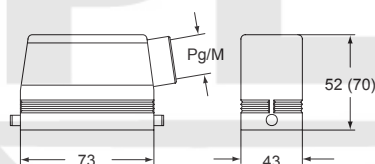
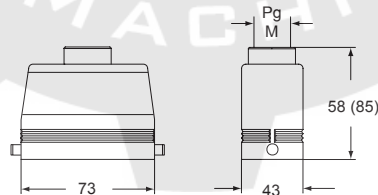
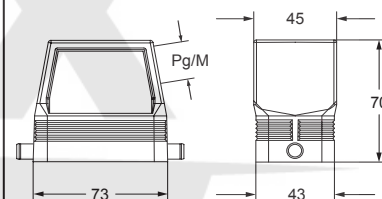
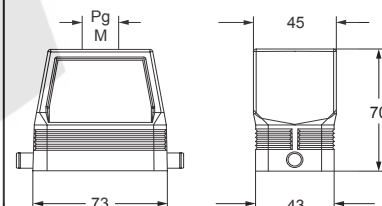
<sup>1)</sup> enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

<sup>2)</sup> can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.

Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/IP67/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449

**CHO L (CAO L) and MHO L (MAO L)****CHV L (CAV L) and MHV L (MAV L)****CFO L and MFO L****CFV L and MFV L**

**CALUS** Type 4/4X/12



insulating cable gland or fittings without gasket



cable gland with O-Ring gasket