



CH - CF and MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

hoods with double top entry



description	part No.	entry Pg	part No.	entry M
with pegs for two levers used with enclosures size "57.27"	CAV 10.213	13,5 x 2	MAV 10.220	20 x 2
with pegs for two levers, without adapter 1) used with enclosures size "57.27"	CFV 10.213	13,5 x 2	MFV 10.220	20 x 2


1) enclosure without adapter, threaded on the body,
to be used only with a complete cable gland.

IP degrees are according to the type of lever of the
counterpart enclosures.

Alternatively, hoods with pegs may be coupled with
fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever,
from page 393 to page 400
- C7, IP66/IP67/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448
and 449

CAV/CFV and MAV/MFV

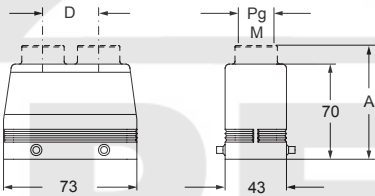

part No.	A	B
CAV 10.213 - MAV 10.220	82 (84,5)	26 (28,5)
CFV 10.213 - MFV 10.220	-	28,5 (26)

CAV[®]US Type
4/4X/12



insulating cable gland or fittings
without gasket



cable gland with O-Ring gasket
IP67 if hoods without adapters coupled
with IP67 housings