

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

hoods with 4 pegs**hoods with 4 pegs
M40 cable entry with 20 mm thread length**

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 16	21	MHO 16.25	25				
with pegs, side entry			MHO 16.32	32				
with pegs, side entry, high construction	CAO 16.21	21	MAO 16.32	32				
with pegs, side entry, high construction	CAO 16.29	29	MAO 16.40	40				
with pegs, side entry, high construction, without adapter ¹⁾					CFO 16.21	21	MFO 16.32	32
with pegs, side entry, high construction, without adapter ¹⁾					CFO 16.29	29	MFO 16.40	40
with pegs, top entry	CHV 16	21						
with pegs, top entry ²⁾			MHV 16.25	25				
with pegs, top entry			MHV 16.32	32				
with pegs, top entry, high construction	CAV 16.21	21	MAV 16.32	32				
with pegs, top entry, high construction	CAV 16.29	29	MAV 16.40	40				
with pegs, top entry, high construction, without adapter ¹⁾					CFV 16.21	21	MFV 16.32	32
with pegs, top entry, high construction, without adapter ¹⁾					CFV 16.29	29	MFV 16.40	40
with pegs, frontal entry, high construction	CAF 16	21	MAF 16.25	25				
with pegs, frontal entry, high construction, without adapter ¹⁾	CFF 16	21	MFF 16.25	25				

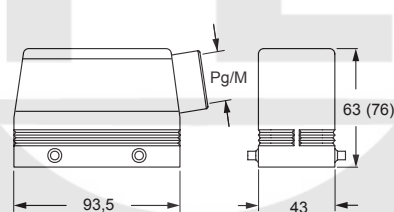
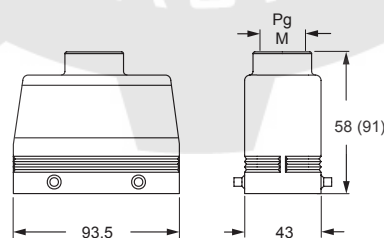
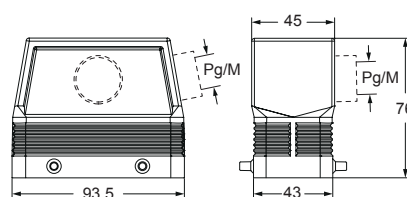
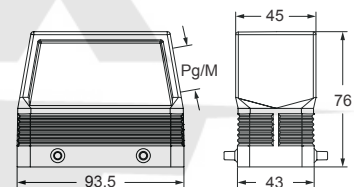
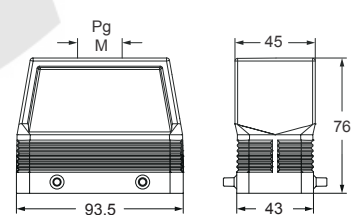
¹⁾ enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

²⁾ can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.

Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/IP67/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455.

CHO (CAO) and MHO (MAO)**CHV (CAV) and MHV (MAV)****CAF/CFF and MAF/MFF****CFO and MFO****CFV and MFV**

CALUS Type 4/4X/12



insulating cable gland or fittings without gasket



cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings