

## CA - CF and MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

## hoods with double top entry



## hoods with double front entry



description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with pegs for two levers								
used with enclosures size "77.27"	CAV 16.216	16 x 2	MAV 16.220	20 x 2				
used with enclosures size "77.27"	CAV 16.221	21 x 2	MAV 16.225	25 x 2				
with pegs for 2 levers, without adapter 1)								
used with enclosures size "77.27"	CFV 16.216	16 x 2	MFV 16.220	20 x 2				
used with enclosures size "77.27"	CFV 16.221	21 x 2	MFV 16.225	25 x 2				
with pegs for two levers								
used with enclosures size "77.27"					CAF 16.221	21 x 2	MAF 16.225	25 x 2
with pegs for 2 levers, without adapter 1)								
used with enclosures size "77.27"					CFF 16.221	21 x 2	MFF 16.225	25 x 2


1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

IP degrees are according to the type of lever of the counterpart enclosures.

Alternatively, hoods with pegs may be coupled with fixed enclosures:


- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/IP67/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

## CAV/CFV and MAV/MFV

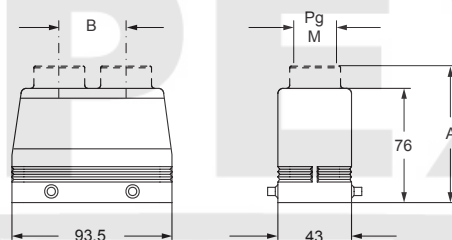

part No.	A	B
CAV 16.216 - MAV 16.220	89 (90,5)	35 (30)
CAV 16.221 - MAV 16.225	90,5 (91)	40
CFV 16.216 - MFV 16.220	-	35 (30)
CFV 16.221 - MFV 16.225	-	40

## CAF/CFF and MAF/MFF

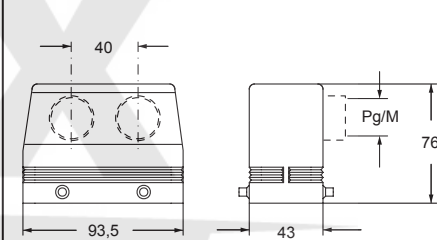

**CALUS**® Type  
4/4X/12



insulating cable gland or fittings  
without gasket



cable gland with O-Ring gasket  
IP67 if hoods without adapters coupled  
with IP67 housings