

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts

CD	64 poles + ⊕	72
CDD	108 poles + ⊕	81
CDS	42 poles + ⊕	-
CDSH	42 poles + ⊕	89
CNE	24 poles + ⊕	113
CSE	24 poles + ⊕	-
CSH	24 poles + ⊕	113
CSH S	24 poles + ⊕	125
CCE	24 poles + ⊕	133
CMSH	10+2 (aux) poles + ⊕	140
CMCE	10+2 (aux) poles + ⊕	141
CSS	24 poles + ⊕	151
CQE	46 poles + ⊕	171
CQEE	64 poles + ⊕	177
CX	4/8 and 6/6 poles + ⊕	204 and 206
MIXO	6 modules	262 - 317

page:

hoods with 2 pegs



hoods with 2 pegs

M40 cable entry with 20 mm thread length



description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 24 L	21	MHO 24 L25	25				
with pegs, side entry			MHO 24 L32	32				
with pegs, side entry, high construction	CAO 24 L21	21	MAO 24 L32	32				
with pegs, side entry, high construction	CAO 24 L29	29	MAO 24 L40	40				
with pegs, side entry, high construction, without adapter 1)					CFO 24 L21	21	MFO 24 L32	32
with pegs, side entry, high construction, without adapter 1)					CFO 24 L29	29	MFO 24 L40	40
with pegs, top entry	CHV 24 L	21	MHV 24 L25	25				
with pegs, top entry 2)			MHV 24 L32	32				
with pegs, top entry			MHV 24 L40	40				
with pegs, top entry	CHV 24 L29	29	MAV 24 L32	32				
with pegs, top entry, high construction	CAV 24 L21	21	MAV 24 L32	32				
with pegs, top entry, high construction	CAV 24 L29	29	MAV 24 L40	40				
with pegs, top entry, high construction, without adapter 1)					CFV 24 L21	21	MFV 24 L32	32
with pegs, top entry, high construction, without adapter 1)					CFV 24 L29	29	MFV 24 L40	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


2) can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.


Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CHO L (CAO L) and MHO L (MAO L)

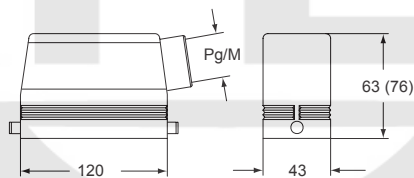


CHV L (CAV L) and MHV L (MAV L)

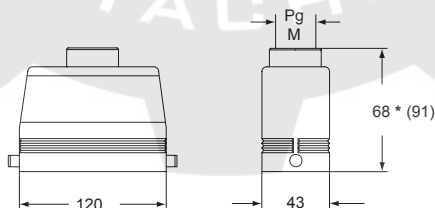


* 69,5 for Pg 29 - M 40 versions

CFO L and MFO L

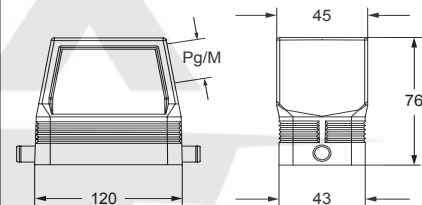

CFV L and MFV L

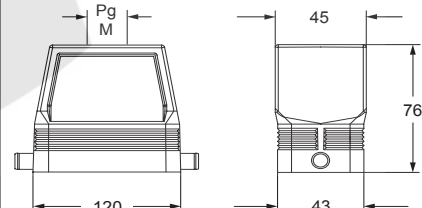

CALUS Type 4/4X/12



insulating cable gland or fittings without gasket



cable gland with O-Ring gasket