

CV - CVA and MV - MVA V-TYPE lever version


inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

surface mounting housings
with single lever in stainless steel



description	part No.	entry Pg	part No	entry M
with lever, size "77.27"	CVP 16 L	21	MVP 16 L25	25
with lever, size "77.27"	CVP 16 L2	21 x 2	MVP 16 L225	25 x 2
with lever, high construction, size "77.27"	CVAP 16 L21	21	MVAP 16 L32	32
with lever, high construction, size "77.27"	CVAP 16 L221	21 x 2	MVAP 16 L232	32 x 2
with lever, high construction, size "77.27"	CVAP 16 L29	29	MVAP 16 L40	40
with lever, high construction, size "77.27"	CVAP 16 L229	29 x 2	MVAP 16 L240	40 x 2

CVP L - CVAP L and MVP L - MVAP L

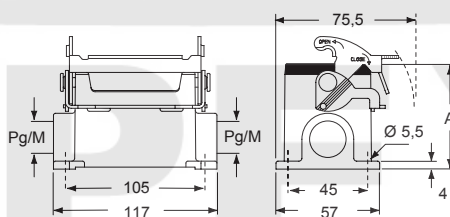

type	A
CVP/MVP 16 L	63
CVAP/MVAP 16 L	81

Hoods
(from page 404)



CAUS® Type
4/4X/12



insulating cable gland or fittings
without gasket



cable gland
with O-Ring gasket