



CV V-TYPE lever version

inserts		page:
CD	64 poles + ⊕	72
CDD	108 poles + ⊕	81
CDS	42 poles + ⊕	-
CDSH	42 poles + ⊕	89
CNE	24 poles + ⊕	113
CSE	24 poles + ⊕	-
CSH	24 poles + ⊕	113
CSH S	24 poles + ⊕	125
CCE	24 poles + ⊕	133
CMSH	10+2 (aux) poles + ⊕	140
CMCE	10+2 (aux) poles + ⊕	141
CSS	24 poles + ⊕	151
CT, CTS (10A) *	64 poles + ⊕	157
CT, CTSE (16A) *	24 poles + ⊕	163
CQE	46 poles + ⊕	171
CQEE	64 poles + ⊕	177
CX	4/8 and 6/6 poles + ⊕	204, 206
MIXO	6 modules	262 - 317

*) can be used only in bulkhead mounting housings

bulkhead mounting housings
with single lever in stainless steel




bulkhead mounting housings
with single lever in stainless steel



description	part No.	part No.
with lever and gasket, size "104.27"	CVI 24 L	
with lever, gasket and cover in aluminium, size "104.27"		CVI 24 LS
with lever, gasket and cover in plastic, size "104.27"		CVI 24 LP

☑ The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.


panel cut-out for bulkhead mounting housings

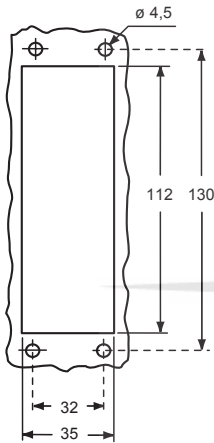


Hoods
(from page 414)



CVI L

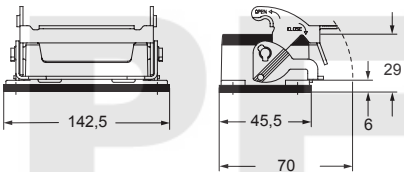

CVI LS/LP

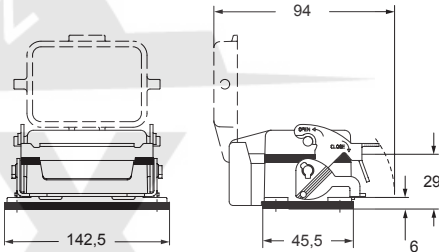

CAVUS Type 4/4X/12



CAVUS Type 4/4X/12
(except enclosures with plastic cover)

