

CA and MA CENTRAL LEVER

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CSS	10 poles + ⊕	149
CQE	18 poles + ⊕	169
MIXO	3 modules	262 - 317

hoods with central lever



hoods with central lever




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
side entry, high construction	CAO 06 YX21	21	MAO 06 YX25	25				
side entry, high construction	CAO 06 YX29	29	MAO 06 YX32	32				
top entry, high construction					CAV 06 YX21	21	MAV 06 YX25	25
top entry, high construction					CAV 06 YX29	29	MAV 06 YX32	32


Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of $\pm 5^\circ$.

CAO..YX and MAO..YX

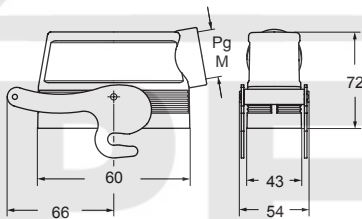

CAV..YX and MAV..YX

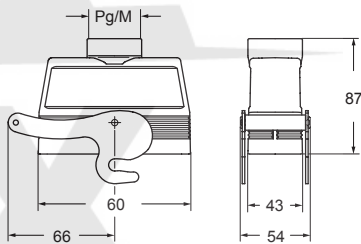

CAUS Type 4/4X/12

