


CD 64 poles + $\oplus$ 10A - 250Venclosures:
size "104.27"

page:

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536 - 537, 545, 556 - 557
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:
COBpage:
652 - 653

inserts, crimp connections

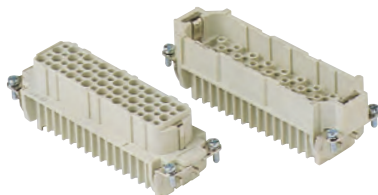10A crimp contacts
silver and gold plated

description

part No.

part No.

part No.

without contacts (to be ordered separately)

female inserts for female contacts

CD F 64
CD M 64

male inserts for male contacts

10A female contacts

0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. 2
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDFA 0.3
CDFA 0.5
CDFA 0.7
CDFA 1.0
CDFA 1.5
CDFA 2.5

silver plated

CDFD 0.3
CDFD 0.5
CDFD 0.7
CDFD 1.0
CDFD 1.5
CDFD 2.5

gold plated+

10A male contacts

0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. 2
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDMA 0.3
CDMA 0.5
CDMA 0.7
CDMA 1.0
CDMA 1.5
CDMA 2.5
CDMD 0.3
CDMD 0.5
CDMD 0.7
CDMD 1.0
CDMD 1.5
CDMD 2.5

- characteristics according to EN 61984:

10A 250V 4kV 3**10A 230/400V 4kV 2**
 - cULus (UL for USA and Canada),
 - certified

- rated voltage according to UL/CSA: 600V

- insulation resistance: ≥ 10 G Ω

- ambient temperature limit: -40 °C ... +125 °C



- made of self-extinguishing thermoplastic resin UL 94V-0

- mechanical life: ≥ 500 cycles- contact resistance: ≤ 3 m Ω




- for applications requiring higher voltages, please see the special voltage application section on page 65

- it is recommended to crimp the contacts with crimping tools homologated by ILME (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)

- for max. current load see the connector inserts derating diagram below; for more information see page 28




contacts side (front view)



CDF and CDM contacts

conductor section mm ²	conductor slot Ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

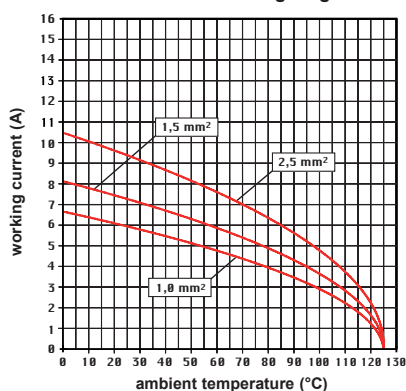CD 64 poles connector inserts
Maximum current load derating diagramCR CP coding pin
with loss of one contact
(page 689)

+ for basic or high thickness gold plating, please refer to page 674