

CDD 42 poles + ⊕ 10A - 250Venclosures:
size "57.27"

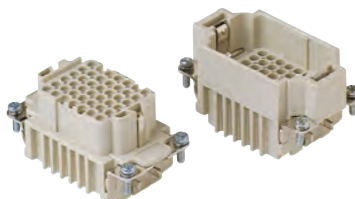
page:

C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof	532 - 533, 543, 552 - 553
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports:
COBpage:
652 - 653

PCBs interface, see article CIF 2.4 on page 670

inserts, crimp connections

10A crimp contacts
silver and gold plated

description

part No.

part No.

part No.

without contacts (to be ordered separately)

female inserts for female contacts

CDDF 42
CDDM 42

male inserts for male contacts

10A female contacts

0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. ②
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDFA 0.3
CDFA 0.5
CDFA 0.7
CDFA 1.0
CDFA 1.5
CDFA 2.5

silver plated

CDFD 0.3
CDFD 0.5
CDFD 0.7
CDFD 1.0
CDFD 1.5
CDFD 2.5

gold plated+

10A male contacts

0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. ②
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDMA 0.3
CDMA 0.5
CDMA 0.7
CDMA 1.0
CDMA 1.5
CDMA 2.5
CDMD 0.3
CDMD 0.5
CDMD 0.7
CDMD 1.0
CDMD 1.5
CDMD 2.5

- characteristics according to EN 61984:

10A 250V 4kV 2
 - cULus (UL for USA and Canada),
 - certified

- rated voltage according to UL/CSA: 600V

- insulation resistance: $\geq 10 \text{ G}\Omega$

- ambient temperature limit: -40 °C ... +125 °C


- made of self-extinguishing thermoplastic resin UL 94V-0

- mechanical life: ≥ 500 cycles- contact resistance: $\leq 3 \text{ m}\Omega$




- for applications requiring higher voltages, please see the special voltage application section on page 75

 - **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)

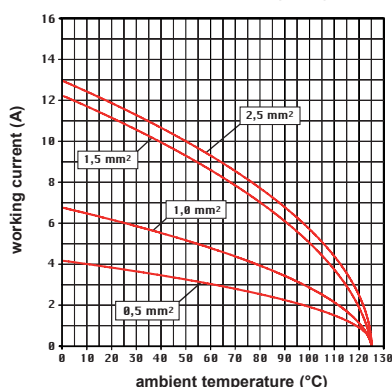
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

**CDF and CDM contacts**

conductor section mm ²	conductor slot Ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 42 poles connector inserts
Maximum current load derating diagram
CR CP coding pin
with loss of one contact
(page 689)


+ for basic or high thickness gold plating, please refer to page 674