





1 3/8" MIN Power Series Field Wireable Plugs

3 & 4 Conductor PMIN Series Field Wireable Plugs, 10-14AWG





Right Angle Field Wireable Plugs | 600 Volt MAX | IP67 Rating



# of Poles	Male Faceview	Rating	Wire AWG	Cable Types	Cable O.D. Range	Grommet Color	Male Right Angle	Female Right Angle
3	 1.375"-16UN2	Cable Rated <75 °C 600VAC MAX 35A MAX Cable Rated 75°C+ 600VAC MAX 45A MAX	10-14 AWG	STOW, STOOW (US)	13-15 mm	Gray	PMIN-3MP-FW-R	PMIN-3FP-FW-R
					13-18 mm	Black		
				TC-ER (US)	12-13 mm	Gray		
					12-13 mm	Black		
				SEOOW (US)	13-16 mm	Gray		
					13-18 mm	Black		
				STOW, STOOW (CN)	13-18 mm	Black		
				SEOOW (CN)	13-18 mm	Black		
4	 1.375"-16UN2	Cable Rated <75 °C 600VAC MAX 32A MAX Cable Rated 75°C+ 600VAC MAX 40A MAX	10-14 AWG	STOW, STOOW (US)	13-15 mm	Gray	PMIN-4MP-FW-R	PMIN-4FP-FW-R
					13-18 mm	Black		
				TC-ER (US)	12-13 mm (0.468"-0.509")	Gray		
					12-13 mm (0.502"-0.509")	Black		
				SEOOW (US)	13-16 mm	Gray		
					13-18 mm	Black		
				STOW, STOOW (CN)	13-18 mm	Black		
				SEOOW (CN)	13-18 mm	Black		

Voltage and amperage ratings are cable dependent and are based on 600VAC 10 AWG cable. Cables with lower voltage ratings or smaller wire gauge will lower these ratings.

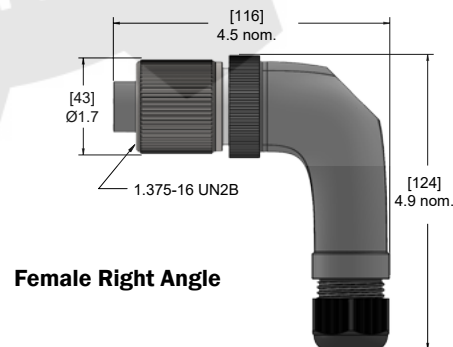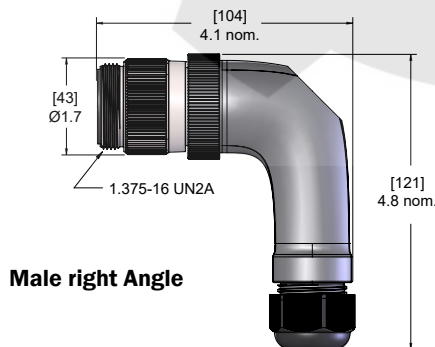

Specifications:

Body: Black Polyamide
Contacts: Copper Alloy with Gold Plating
O-Rings: NBR
Coupling Nut: Nickel Plated Brass

Insert: PBT
Connections: Screw Terminals
SCCR Rating: 65kA Breakers and Fuses
Temperature: -40 °C to +105°C (-40°F to +221°F)