





# of Poles	Male Faceview	Color Code	Wire AWG	Mounting Threads	Male Receptacles
26	M27 x 1	1. White 2. Brown 3. Green 4. Yellow 5. Gray 6. Pink 7. Blue 8. Red 9. Black 10. Violet 11. Gray/Pink 12. Red/Blue 13. White/Green 14. Brown/Green 15. White/Yellow 16. Yellow/Brown 17. White/Gray 18. Gray/Brown 19. White/Pink 20. Pink/Brown 21. White/Blue 22. Brown/Blue 23. White/Red 24. Brown/Red 25. White/Black 26. Green Yellow	22 AWG	M20	MCX-26MR-**-M20
				M25	MCX-26MR-**-M25
				M25L	MCX-26MR-**-M25L
				PG21	MCX-26MR-**-PG21
28	M27 x 1	1. White 2. Brown 3. Green 4. Yellow 5. Gray 6. Pink 7. Blue 8. Red 9. Black 10. Violet 11. Gray/Pink 12. Red/Blue 13. White/Green 14. Brown/Green 15. White/Yellow 16. Yellow/Brown 17. White/Gray 18. Gray/Brown 19. White/Pink 20. Pink/Brown 21. White/Blue 22. Brown/Blue 23. White/Red 24. Brown/Red 25. White/Black 26. Green Yellow 27. Brown/Black 28. Gray/Green	22 AWG	M20	MCX-28MR-**-M20
				M25	MCX-28MR-**-M25
				M25L	MCX-28MR-**-M25L
				PG21	MCX-28MR-**-PG21


** Length in meters. 0.3m leads are standard. Longer lead lengths are available, please consult the factory for part numbers.

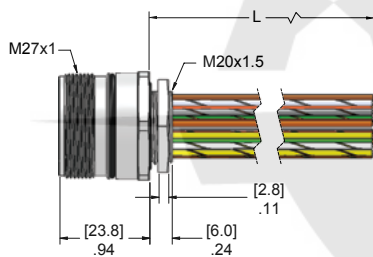


M20 Threads

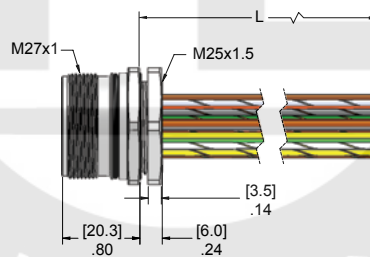

M25 Threads

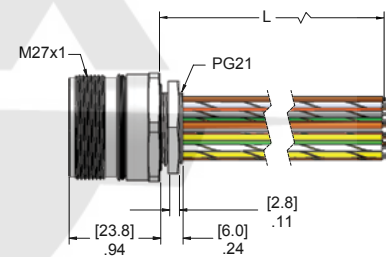

PG21 Threads

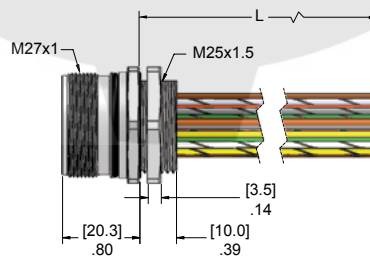

M25L Threads

Specifications:

Body: Nickel Plated Brass
 Contacts: Copper Alloy with Gold Plating
 Coupling Nut: Nickel Plated Brass
 Insulator: Polyamide

O-Ring: FPM
 Jam Nut: Nickel Plated Brass
 Temperature: -40°C to +105°C (-40°F to +221°F)