





# Euro-AC (M12) Series Field Wireable Plugs

4 & 5 Conductor MEC Series Field Wireable Plugs, 18-24AWG




Field Wireable Plugs | PG 7, 9 & 11 Threads | 250 Volt, 4 amps | IP67 Rating




| # of Poles | Male Faceview                                                                                | Wire AWG Rating         | Cable O.D. Range | Male plugs   |                | Female Plugs |                |
|------------|----------------------------------------------------------------------------------------------|-------------------------|------------------|--------------|----------------|--------------|----------------|
|            |                                                                                              |                         |                  | Straight     | Right Angle    | Straight     | Right Angle    |
| 4          | <br>M12 x 1 | 18-24 AWG<br>250V<br>4A | 3-6.5 mm         | MEC-4MP-FW07 | MEC-4MP-FW07-R | MEC-4FP-FW07 | MEC-4FP-FW07-R |
|            |                                                                                              |                         | 4-8 mm           | MEC-4MP-FW09 | MEC-4MP-FW09-R | MEC-4FP-FW09 | MEC-4FP-FW09-R |
|            |                                                                                              |                         | 5-10 mm          | MEC-4MP-FW11 | N/A            | MEC-4FP-FW11 | N/A            |
| 5          | <br>M12 x 1 | 18-24 AWG<br>250V<br>4A | 3-6.5 mm         | MEC-5MP-FW07 | MEC-5MP-FW07-R | MEC-5FP-FW07 | MEC-5FP-FW07-R |
|            |                                                                                              |                         | 4-8 mm           | MEC-5MP-FW09 | MEC-5MP-FW09-R | MEC-5FP-FW09 | MEC-5FP-FW09-R |
|            |                                                                                              |                         | 5-10 mm          | MEC-5MP-FW11 | N/A            | MEC-5FP-FW11 | N/A            |

These connectors are easily wired by inserting the individual wires into the screw terminal contacts. The connectors are water tight to IP 67 and are fully mateable with other "EURO-AC" style connectors. Standard coupling nut is nickel plated brass, for stainless steel coupling nut add a "SS" suffix. (e.g. MEC-4MP-FW07 becomes MEC-4MP-FW07-SS)

## Straight Field Wireable Plugs

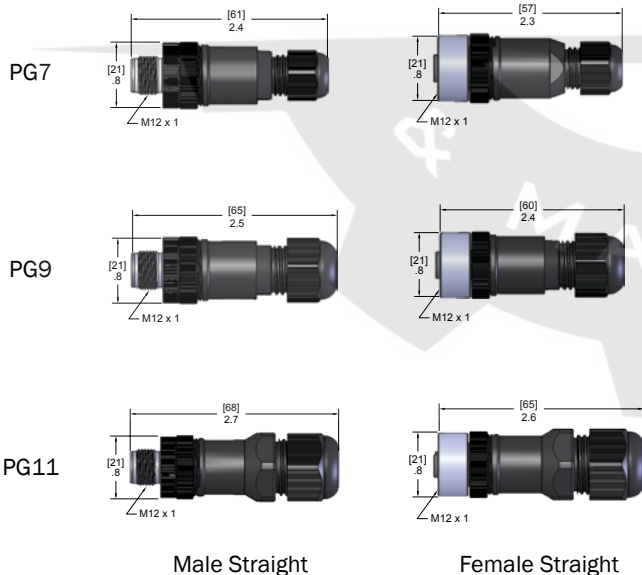

## Right Angle Field Wireable Plugs

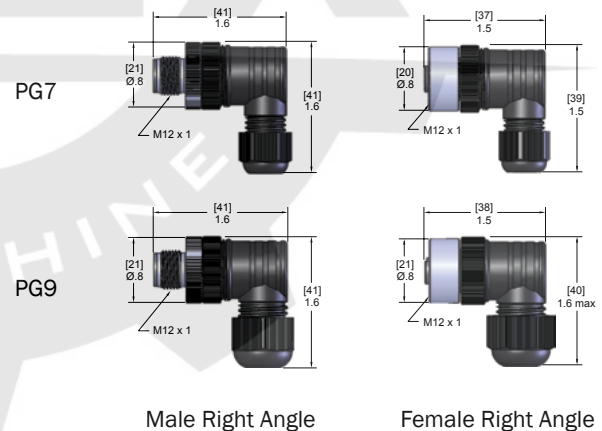

## Specifications:

Body: Black Polyamide  
Insulator: Black Polyamide  
Contacts: Copper Alloy with Gold Plating

Coupling Nut: Nickel Plated Brass  
Seal: NBR  
Temperature: -25°C to +85°C (-13°F to +185°F)