



DeviceNet Series Cordsets


5 Conductor DeviceNet Series Cordsets, 15/18AWG



Double Ended Cordsets | 600 Volt, 8 amps | 300 Volt, 4 amps | IP69 Rating



7/8"-16UN Trunk Extension - Thick Cable					
Male Faceview	Part Number	Cables	Features	Color Code	Female Faceview
7/8"-16UN2	MINDT-5MFP-**-	Gray PVC Trunk Cable AWM With Braided Shield 2 X 15 AWG 2 X 18 AWG 1 x 18 AWG (Drain) 600V, 8A -40°C to +80°C 11.2mm OD	Industry Standard PVC 7/8"-16UN to 7/8"-16UN Braided Shield	1. Bare (Drain) 2. Red (V+) 3. Black (V-) 4. White (CAN_H) 5. Blue (CAN_L)	7/8"-16UN2
7/8"-16UN Drop Extension - Thin Cable					
7/8"-16UN2	MINDD-5MFP-**-	Gray PVC Drop Cable AWM With Braided Shield 2 X 22 AWG 2 X 24 AWG 1 x 22 AWG (Drain) 300V, 4A -40°C to +80°C 7.4mm OD	Industry Standard PVC 7/8"-16UN to 7/8"-16UN Braided Shield	1. Bare (Drain) 2. Red (V+) 3. Black (V-) 4. White (CAN_H) 5. Blue (CAN_L)	7/8"-16UN2




Male(Male Thread) 7/8"-16UN to Female 7/8"-16UN Extension

7/8"-16UN Male to M12 Female Extension - Thin Cable					
Male Faceview	Part Number	Cables	Features	Color Code	Female Faceview
7/8"-16UN2	MINDCDD-5MFP-**-	Gray PVC Drop Cable AWM With Braided Shield 2 X 22 AWG 2 X 24 AWG 1 x 22 AWG (Drain) 300V, 4A -40°C to +80°C 7.4mm OD	Industry Standard PVC 7/8"-16UN to M12 Braided Shield	1. Bare (Drain) 2. Red (V+) 3. Black (V-) 4. White (CAN_H) 5. Blue (CAN_L)	M12 x 1

** Lengths in meters. Standard cable lengths are 1, 2, 4, 5, 6, 10 & 15 meters. Consult factory for other lengths.

Standard coupling nut is nickel plated brass, for stainless steel coupling nut add a "SS" suffix. (e.g. MINDCDD-5MFP-1M becomes MINDCDD-5MFP-1M-SS)

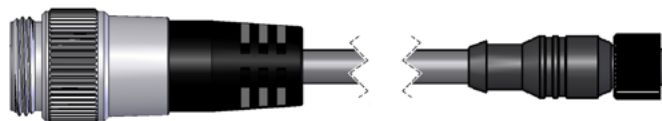

Male 7/8"-16UN to Female M12 Extension