





# JDC (M12) Junction Blocks

4 Port, 5 Pin JDC Junction blocks




Straight Wired | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number
	UL Listed	Field Wireable 24 AWG - 16 AWG	JDC-4A0-017-F000
	UL Listed	Black PUR AWM With Foil Shield 22 AWG Drain Wire <b>3 x 18 AWG</b> <b>4 x 22 AWG</b> 10.9mm OD	JDC-4A0-017-C**

\*\* Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

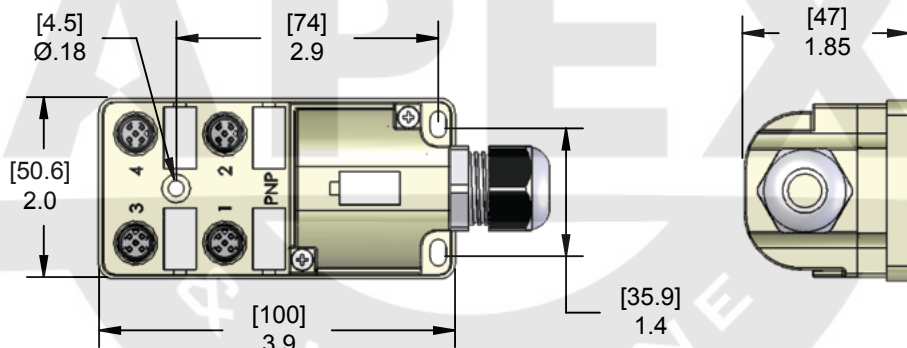

JDC Junction Blocks

Q

## Specifications:

Ratings:

3 A per Connector

8 A per Block

Voltage:

Without LEDs: 0-150 Volt Max

With LEDs: 48 VDC Max in accordance with LED Configuration

Body:

Polypropylene

Inserts:

Polyamide

Port Coupling Nuts:

PBT

O-Ring:

BUNA-N

LED Lens:

Polycarbonate

Contacts:

Copper Alloy with Gold Plating

Marker Tags:

Polyamide (supplied on all units)