







JDC (M12) Junction Blocks

6 Port, 4 Pin JDC Junction blocks




MIN Receptacle | MIN Plug | M23 Receptacle | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size III 9 Pole Male Receptacle	JDC-640-009-M000	JDC-64P-209-M000	JDC-64N-209-M000
	N/A	M23 12 Pole Male Receptacle	JDC-640-012-V000	JDC-64P-212-V000	JDC-64N-212-V000
	N/A	MIN Size III 9 Pole Male Plug with Male Thread	JDC-640-009-M003	JDC-64P-209-M003	JDC-64N-209-M003
	N/A	MIN Size III 9 Pole Male Plug	JDC-640-009-M**	JDC-64P-209-M**	JDC-64N-209-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

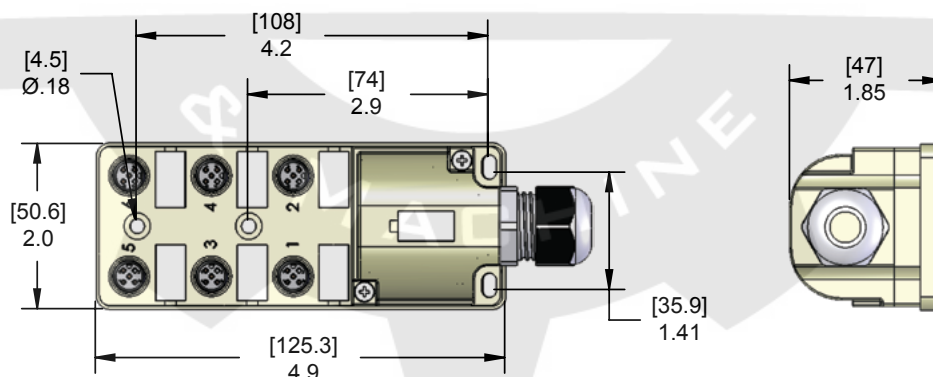

Specifications:

Ratings:	3 A per Connector 8 A per Block
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration
Body:	Polypropylene
Inserts:	Polyamide
Port Coupling Nuts:	PBT
O-Ring:	BUNA-N
LED Lens:	Polycarbonate
Contacts:	Copper Alloy with Gold Plating
Marker Tags:	Polyamide (supplied on all units)