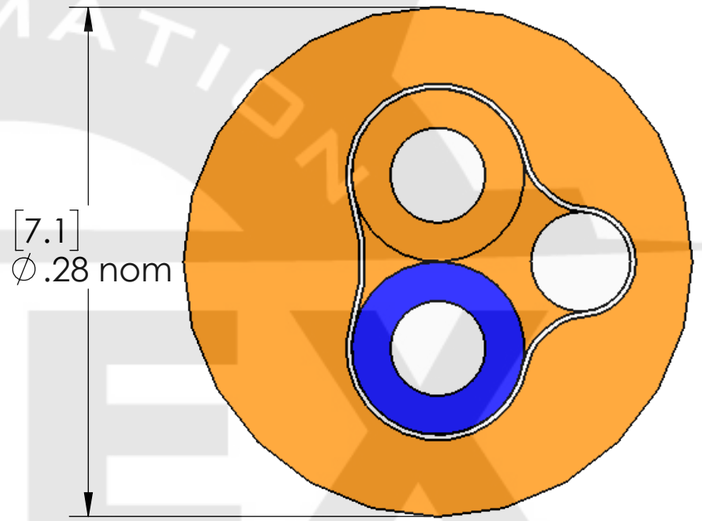

SPECIFICATIONS:	
UL STYLE:	AWM 20201
CSA STYLE:	
NUMBER OF CONDUCTORS:	2
CABLE JACKET MATERIAL:	ORANGE PVC
COND. JACKET MATERIAL:	XLPE
COND. JACKET THICKNESS:	.023" MIN
COND. STRANDING:	18AWG
FILLER:	Poly
DRAIN WIRE:	22 AWG TC stranded
SEPARATOR:	Aluminum Foil-Polyester Tape
LAY:	2.25" nom.
ELECTRICAL REQUIREMENTS:	@ 31.25kHz
IMPEDANCE	100+/-10?
DWV	1.5kVAC
MECHANICAL REQUIREMENTS:	
EXTRUSION STYLE:	PRESSURE EXTRUSION
JACKET PRINTING:	INK PRINTING OF UL / CSA INFORMATION. NO COMPANY NAMES ALLOWED
CONVOLUTIONS:	NONE ALLOWED. LEVEL 2 SMOOTH

CABLE SUPPLIED ON A SINGLE SPOOL.
1 BREAK ALLOWED FOR LENGTHS
OF 1000' OR MORE WITH NO
PIECE BEING SHORTER THAN 250'

TABLE A		
PART NUMBER	LENGTH	TOL
30AX002-0250	250'	2'
30AX002-0500	500'	5'
30AX002-1000	1000'	5'
30AX002-1500	1500'	5'

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	10/19/2016
CHECKED BY	
CHECK DATE	

COMMENTS:

MENCOM CORPORATION

TITLE:

18/2 Fieldbus cable

SIZE	DWG. NO.	REV
B	30AX002-ZZ	B

SCALE: 12:1 | WEIGHT: | SHEET 1 OF 1