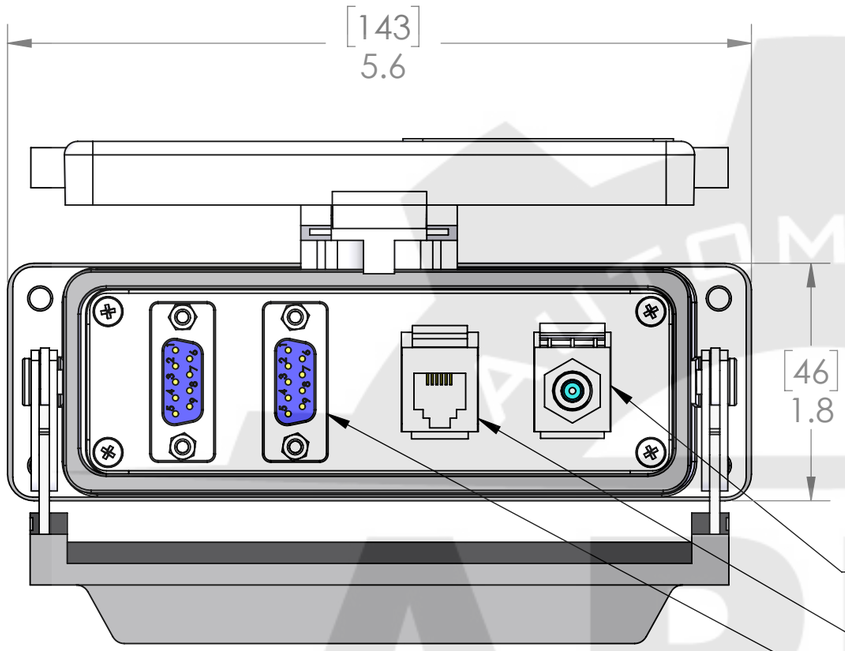

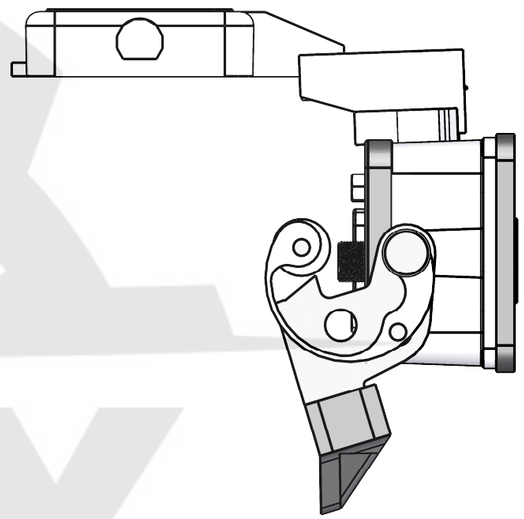

PANEL CUTOUT

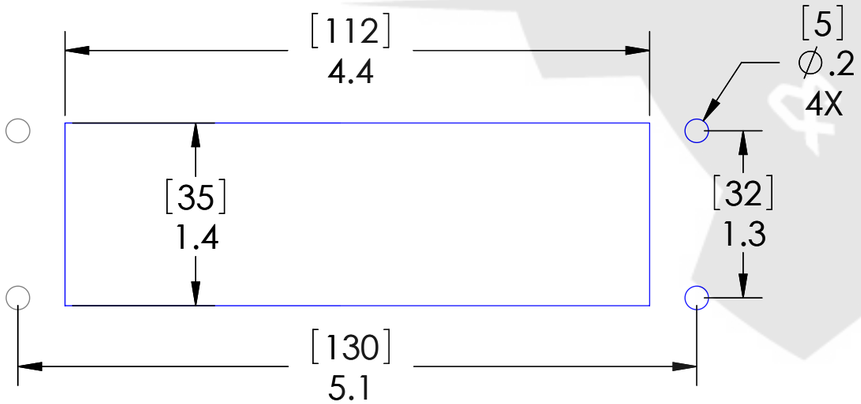

NOTE: RJ11 JACK IS TECHNICALLY AN RJ12 JACK IN THAT IT HAS ALL 6 CONTACTS. IT IS SUITABLE FOR USE WITH ALL RJ11 AND RJ12 APPLICATIONS.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ11	JACK	JACK
ALL D-SUBS	FEMALE	MALE

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT

P/N: D-PIC-MT

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS	
NEMA/UL | EN 60529:	4, 4X, 12 | IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)

c UL us LISTED ENCL. ACC. 5JR2

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	07/02/2021
CHECKED BY	DCG
CHECK DATE	07/02/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

2 DB09;RJ11;CX;24

SIZE	DWG. NO.	REV
B	DB09-2-RJ11-CX-24LS	C

SCALE: 7:8 | WEIGHT: | SHEET 1 OF 1