

8 7 6 5 4 3 2 1

D

C

B


A

D


C

B

A

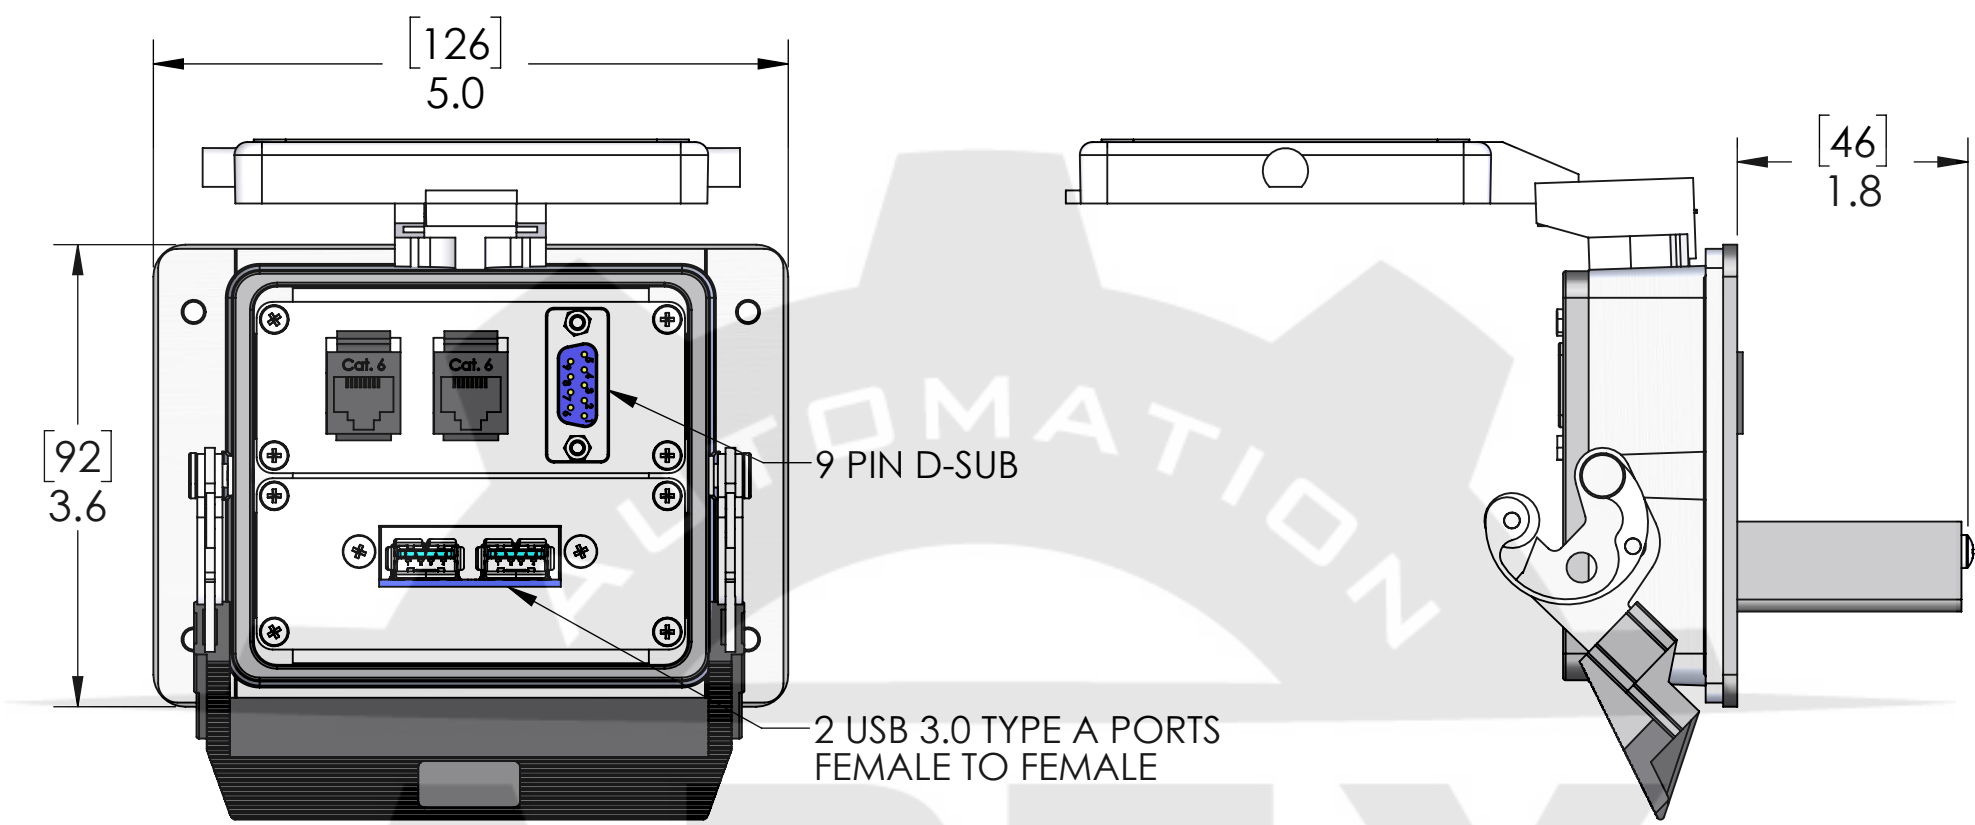

PANEL CUTOUT

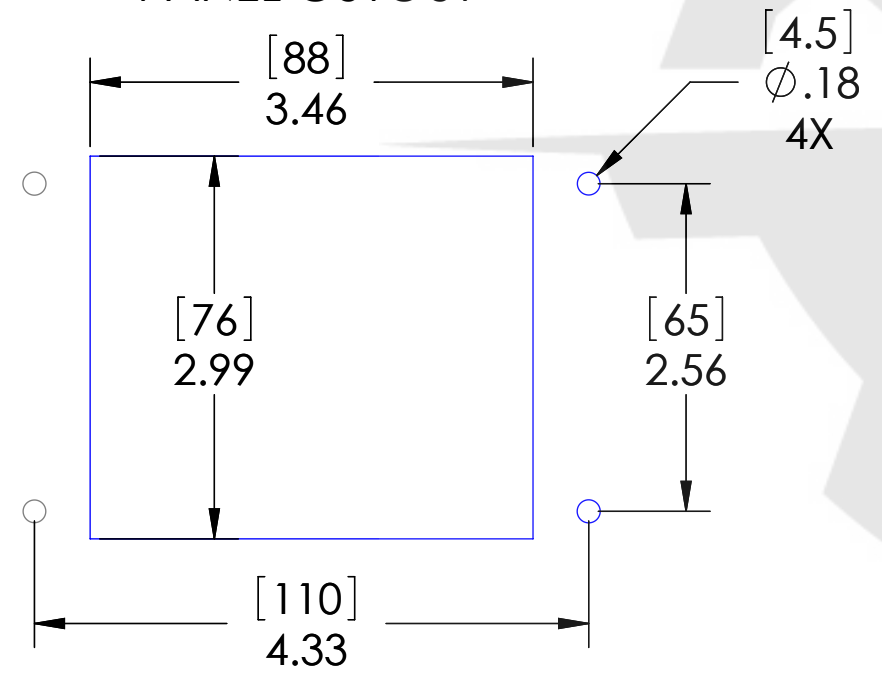


These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK
ALL D-SUBS	FEMALE	MALE

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4X0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	MATERIAL	
	FINISH	
	DO NOT SCALE DRAWING	

PIC RATINGS/SPECIFICATIONS			
NEMA/UL EN 60529:		4, 4X, 12 IP65	
MOUNTING SCREW SIZE:		M4 (8-32) (304 or 316SS for 4X)	
MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)	

MENCOM CORPORATION			
TITLE: DB9; 2RJ45; USB; 32			
SIZE B	DWG. NO. DB09-2RJ45-USB-32		REV D
SCALE: 2:3	WEIGHT:		SHEET 1 OF 1