


9 PIN D-SUB CONFIGURED
FEMALE EXTERIOR/ FEMALE INTERIOR

PANEL CUTOUT

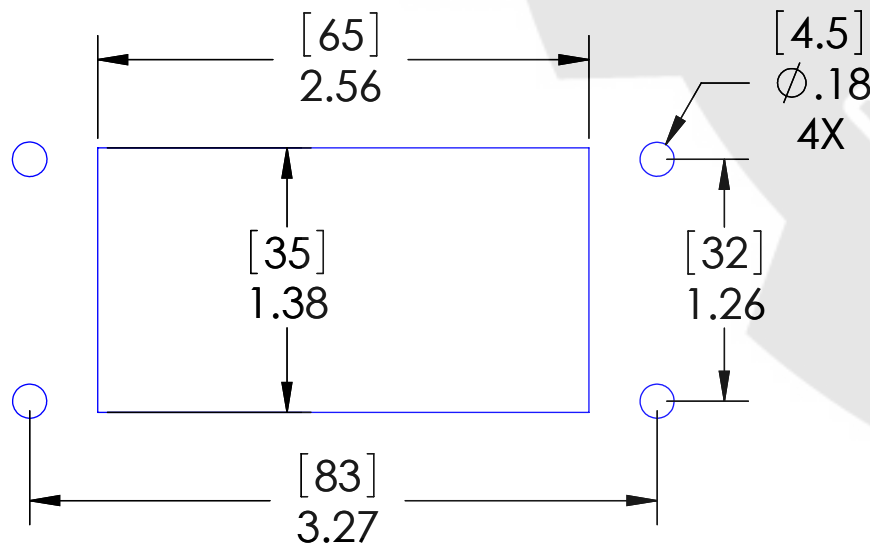

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4X0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL



UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

PIC RATINGS/SPECIFICATIONS			
NEMA/UL EN 60529:		4, 4X, 12 IP65	
MOUNTING SCREW SIZE:		M5 (10-32) (304 or 316SS for 4X)	
MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)	

MENCOM CORPORATION

TITLE:
DB9 FF; RJ45; 10

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

SIZE B	DWG. NO. DB09F-RJ45-10LS	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1