


—8 PIN MINI DIN IS CONNECTED TO A THREE PIN PLUGGABLE TERMINAL BLOCK FOR BLUE HOSE APPLICATION

PANEL CUTOUT

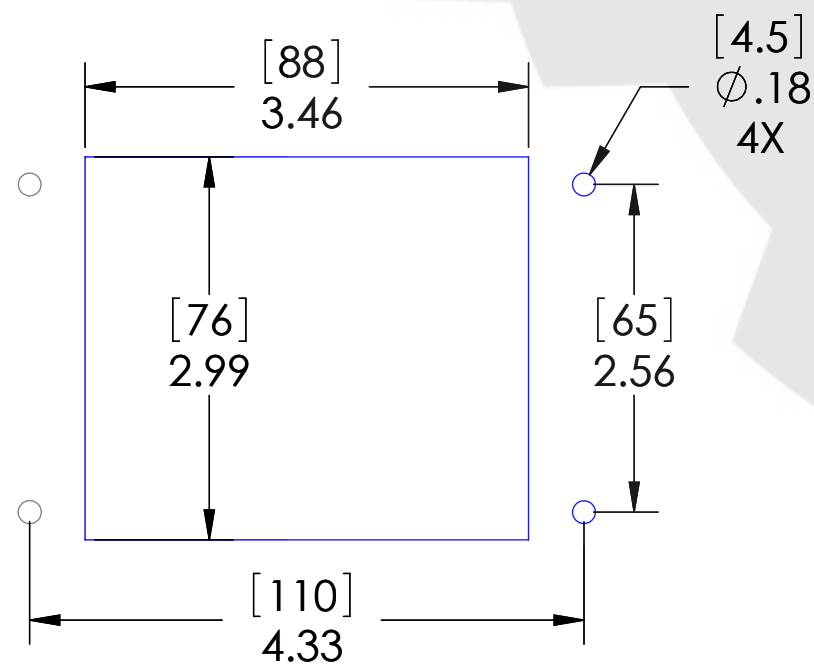

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

		PIC RATINGS/SPECIFICATIONS	
VOLTS:		125V	
AMPS:		3A	
SCCR:		0.2kA	
NEMA/UL EN 60529:		4, 4X, 12 IP65	
MOUNTING SCREW SIZE:		M4 (8-32) (304 or 316SS for 4X)	
MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)	
INCOMING POWER WIRE SIZE:		0.5 ~ 4.0 sq mm / 20-12AWG	
WIRE STRIP LENGTH:		10 ~ 11 mm	
ID:	DRAWN BY	DCG	<div>MENCOM CORPORATION</div> <div>TITLE:</div> <div>DHDP-8M-R-32</div>
	DRAWN DATE	09/22/2016	
	CHECKED BY		
	CHECK DATE		
COMMENTS:			
	SIZE	DWG. NO.	REV
	B	DHDP-8M-R-32	B
	SCALE: 2:3	WEIGHT:	SHEET 1 OF 1