
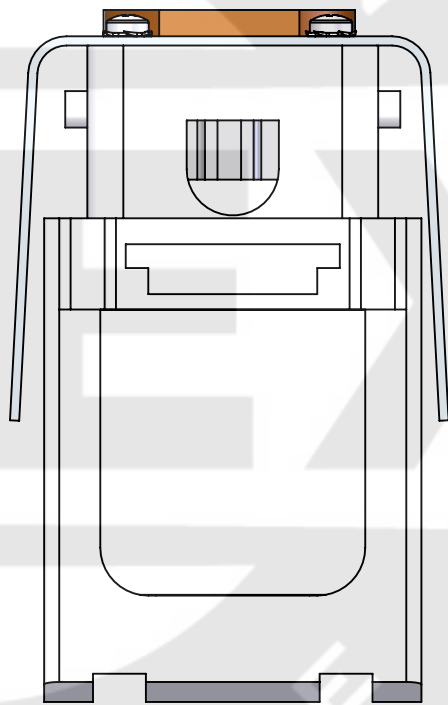


TS SYSTEM ALLOWS UNIT TO BE SNAP FASTENED ONTO
DIN EN 50022 RAIL.

OR

MOUNTING HOLES IN BOTTOM OF UNIT ALLOW FOR
MOUNTING INSIDE OF PANELS WITH FIXED FASTENERS

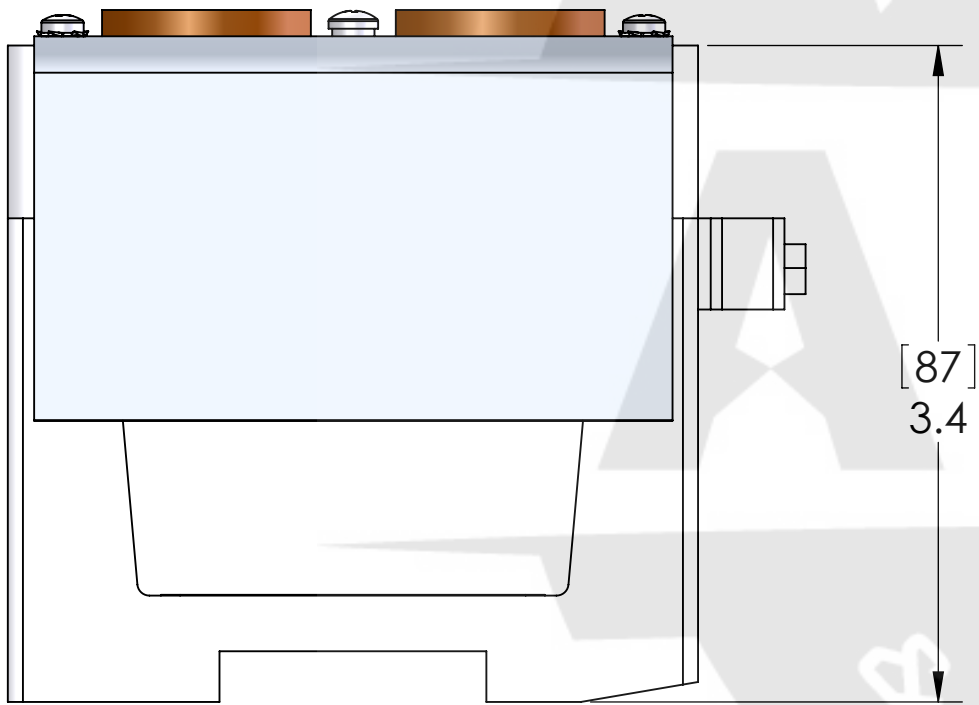

For power connector, crimp terminals
are supplied for hot, neutral and
ground connections.

HOUSING MATERIAL	
PLATE:	304 STAINLESS
BODY:	SELF-EXTINGUISHING THERMOPLASTIC
OPERATING TEMPERATURE: (-40°C / +60° C (-40° F / +140° F))	

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	20A
SCCR:	10kA
MOUNTING SCREW SIZE:	M4 (8-32)
INCOMING POWER WIRE SIZE:	14-16AWG

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

DRAWN BY	DCG
DRAWN DATE	08/16/2021
CHECKED BY	DCG
CHECK DATE	08/16/2021

MENCOM CORPORATION			
TITLE: DINRAIL;DUPLX			
SIZE B	DWG. NO. DP-TS20	REV C	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	