


(2X)USB 3.0 TYPE A CONFIGURED  
FEMALE EXTERIOR / FEMALE INTERIOR

For power connector, crimp terminals  
are supplied for hot, neutral and  
ground connections.

These devices shall be mounted on enclosures having adequate strength and  
thickness and with adequate spacing provided. Seal rating is based on  
mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

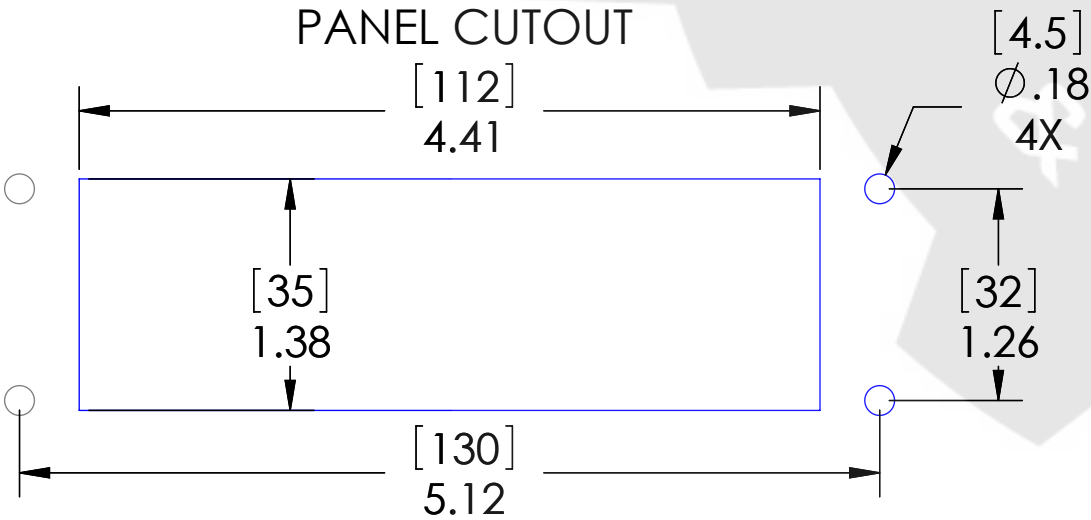

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F ))

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
P/N: D-PIC-MT



UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
FRACTIONAL ±1/64  
ANGULAR: MACH ±5° BEND ±5°  
TWO PLACE DECIMAL ±.01  
THREE PLACE DECIMAL ±.004

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

DRAWN BY	DCG
DRAWN DATE	07/13/2021
CHECKED BY	DCG
CHECK DATE	07/15/2021

COMMENTS:

MENCOM CORPORATION

TITLE:  
SMPLX; RJ45; 2USB-AA; 3A; 24

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED

CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

DO NOT SCALE DRAWING

SIZE B	DWG. NO. DP1-RJ45-2USB-AFAF-R-24	REV D
SCALE: 7:8	WEIGHT:	SHEET 1 OF 1