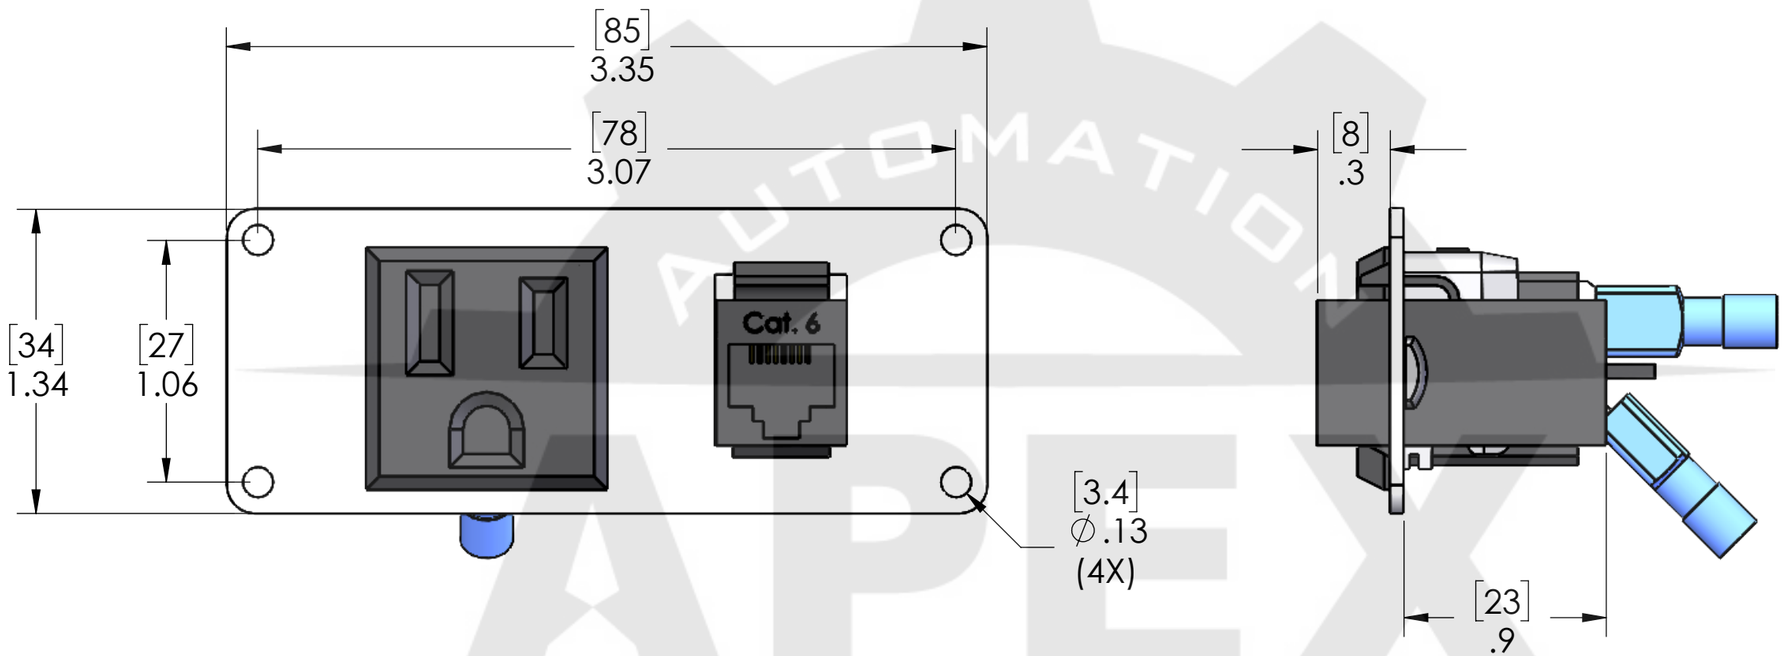

For power connector, crimp terminals are supplied for hot and neutral connection. Ground wire supplied with an M3 ring terminal applied to end of 6" ground lead.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

PIC RATINGS	
VOLTS:	125V
AMPS:	15A
SCCR:	10kA

MATERIALS	
PLATE:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	08/18/2021
CHECKED BY	APR
CHECK DATE	08/18/2021

COMMENTS:

MENCOM CORPORATION

TITLE:
SIMPLX, RJ45, SZ16 PL ONLY

SIZE	DWG. NO.	REV
B	DP1-RJ45-PL16	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1