


— MULTI-CONFIGURATION OULTET
ACCEPTS NEMA 1-15P, 5-15P, 6-15P,
5-20P, 6-20P, & UK1-13P, UK3-5P, JA1-15P,
EU1-16P (NON-GROUNDING), AU1-10P,
AU2-15P, CH1-10P, EUROPLUG AND
AR1-10P TYPE PLUGS

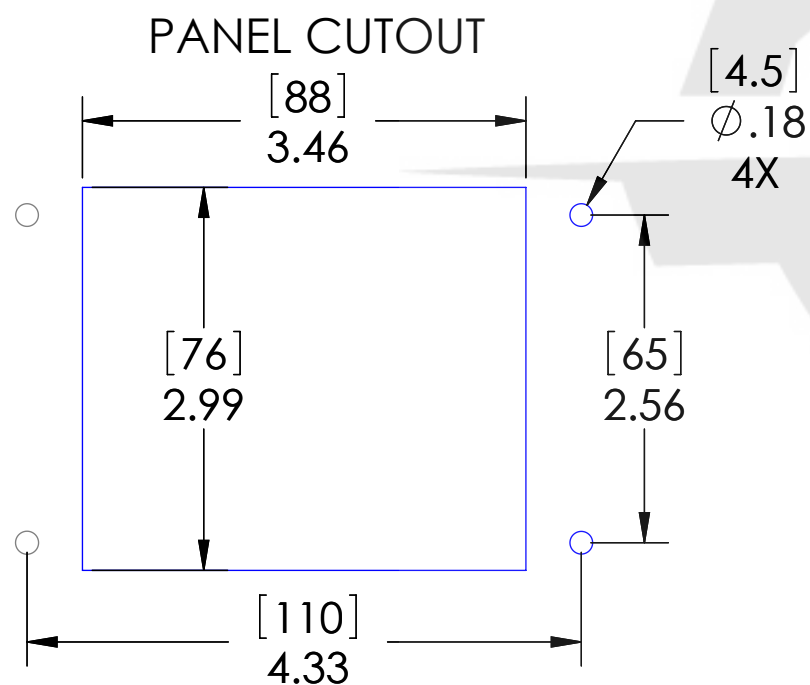

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MM]

	MATERIAL
--	----------

	FINISH
--	--------

DO NOT SCALE DRAWING

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V / 127V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

ED:	DRAWN BY	DCG	<div>MENCOM CORPORATION</div> <div>TITLE:</div> <div>UNIV RCPT; 2RJ45; 3A; 32</div>
	DRAWN DATE	07/08/2021	
	CHECKED BY	DCG	
	CHECK DATE	07/08/2021	

COMMENTS:	SIZE	DWG. NO.	REV
	B	DUN-2RJ45-R-32	E
	SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK