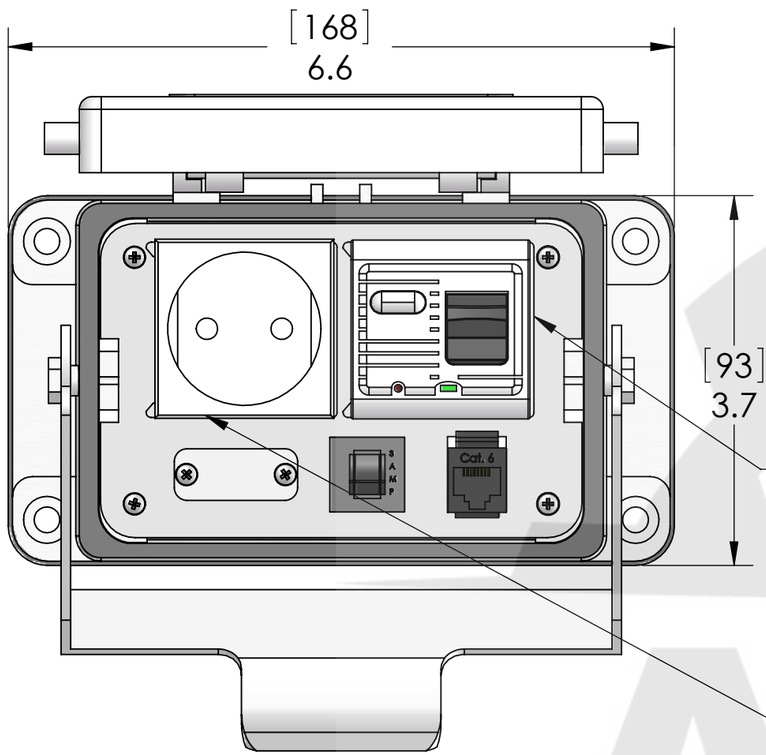


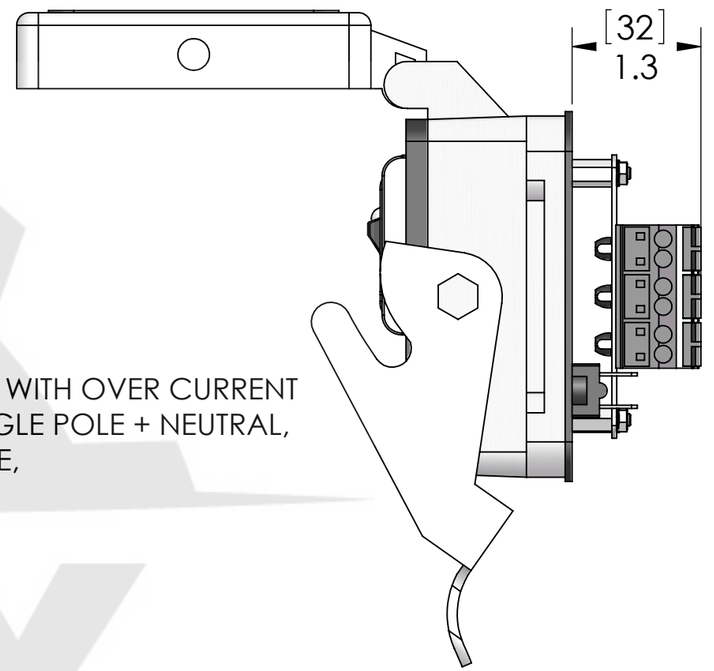


EUROPEAN RCBO CIRCUIT BREAKER, ( RCD / GFCI WITH OVER CURRENT CIRCUIT PROTECTION ), 16 AMPERE-230 VOLT, SINGLE POLE + NEUTRAL, 50/60 HZ, 30 Ma TRIP, 45mmX45mm MODULAR SIZE, TEST/BUTTON, INDICATOR LIGHT.

EUROPEAN "SCHUKO" 16 AMPERE-250 VOLT MODULAR OUTLET CEE7 TYPE F (EU1-16R), SHUTTERED CONTACTS, 2 POLE-3 WIRE GROUNDING (2P+E)

## PANEL CUTOUT

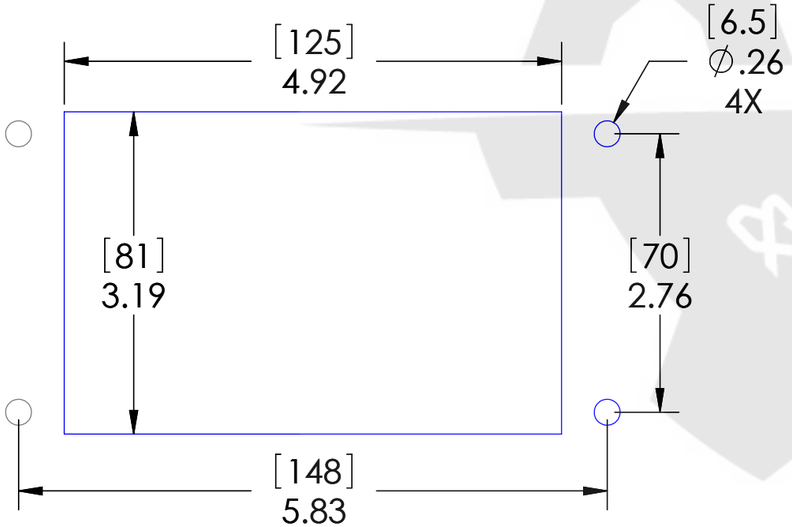


MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT

**P/N: D-PIC-MT**

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| HOUSING MATERIALS | |
|---|---|
| BODY: | NICKEL PLATED ZINC |
| GASKETS: | PUR FIPG |
| FRONT COVER: | POLYCARBONATE |
| LATCH & LOCK: | PBT |

| PIC RATINGS/SPECIFICATIONS | |
|---|---|
| | |
| VOLTS: | 250V |
| AMPS: | 3A |
| NEMA/UL \| EN 60529: | 4, 12 \| IP65 |
| PANEL THICKNESS: | 5.0mm max |
| MOUNTING SCREW TORQUE: | 0.8N-m |
| TERMINAL BLOCK TORQUE: | 0.5N-m |
| INCOMING POWER WIRE SIZE: | 0.25 - 2.5 sq mm / 24-12AWG |
| WIRE STRIP LENGTH: | 7 - 8 mm |

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED | | |
|---|---|---|
| CONN. TYPE | EXTERIOR | INTERIOR |
| RJ45 | CAT. 6 JACK | CAT. 6 JACK |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | dcg |
| DRAWN DATE | 01/15/2019 |
| CHECKED BY | DCG |
| CHECK DATE | 01/15/2019 |

COMMENTS:

MENCOM CORPORATION

TITLE: SCHUKO W/GFI BRKR; RJ45; 3A;48

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | EPGF-RJ45-R-48 | C |

SCALE: 2:3 | WEIGHT: | SHEET 1 OF 1