


PANEL CUTOUT

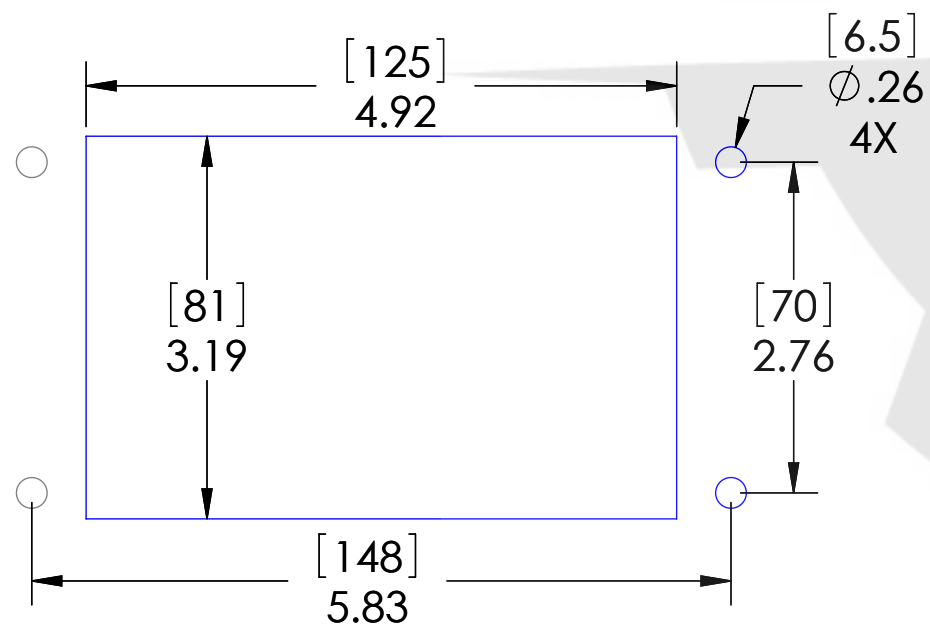

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M6 (1/4-20) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	3.0~3.6N·m (2.2~2.7 Lb·Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

	HOUSING MATERIALS
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	STAINLESS STEEL

OPERATING TEMPERATURE: (-10°C / +60° C (14° F / +140° F)

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M6x1 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M6 NUT
P/N: D-PIC48-MT



UNLESS OTHERWISE SPECIFIED:

S DIMENSIONS ARE IN INCHES
AND [MM]

	MATERIAL
--	----------

	FINISH
--	--------

DO NOT SCALE DRAWING

ED:	DRAWN BY	JJH
	DRAWN DATE	07/27/202
	CHECKED BY	DCG
	CHECK DATE	07/28/202

COMMENTS:

MENCOM CORPORATION

TITLE:

DPLX; 2 RJ45; USB-AA; 3A; 48

SIZE

B

DWG. NO.	
----------	--

GF-2RJ45-USB-AFAF-R-48

EV

C

SCALE: 5:8

WEIGHT:

SHEET 1 OF 1

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.