


(2X)USB 3.0 TYPE A CONFIGURED
FEMALE EXTERIOR / FEMALE INTERIOR

PANEL CUTOUT

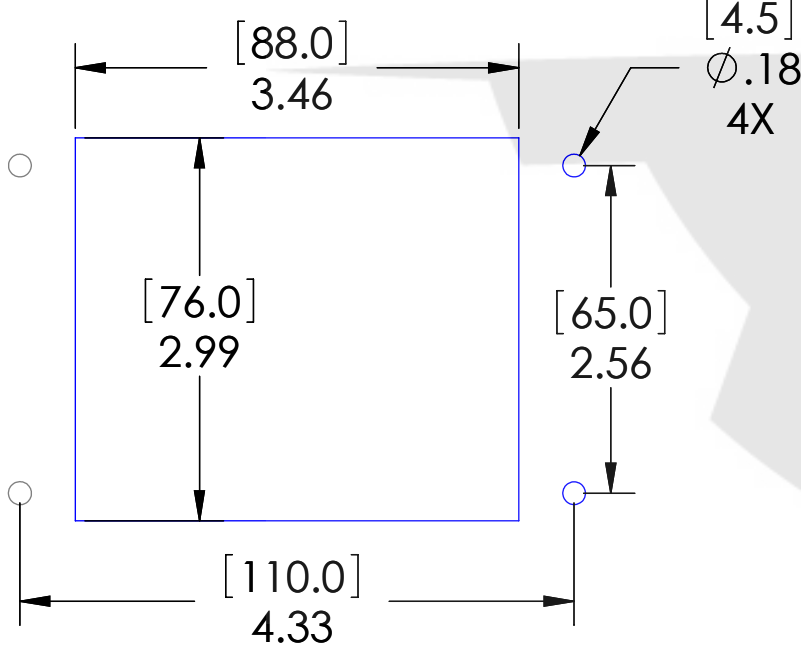

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL



UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS				
VOLTS:		125V		
AMPS:		3A		
SCCR:		0.2kA		
NEMA/UL EN 60529:		4, 4X, 12 IP65		
MOUNTING SCREW SIZE:		M4 (8-32) (304 or 316SS for 4X)		
MOUNTING SCREW TORQUE:		1.2~1.8N-m (0.9~1.3 Lb-Ft)		
INCOMING POWER WIRE SIZE:		0.5 ~ 4.0 sq mm / 20-12AWG		
WIRE STRIP LENGTH:		10 ~ 11 mm		
DRAWN BY	DCG	MENCOM CORPORATION TITLE: GF; 2 USB-AA; 3A; 32		
DRAWN DATE	11/21/2018			
CHECKED BY	GO			
CHECK DATE	11/26/2018			
COMMENTS:		SIZE	DWG. NO.	REV
		B	GF-2USB-AFAF-R-32	B
		SCALE: 2:3		WEIGHT:
				SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.