PANEL CUTOUT

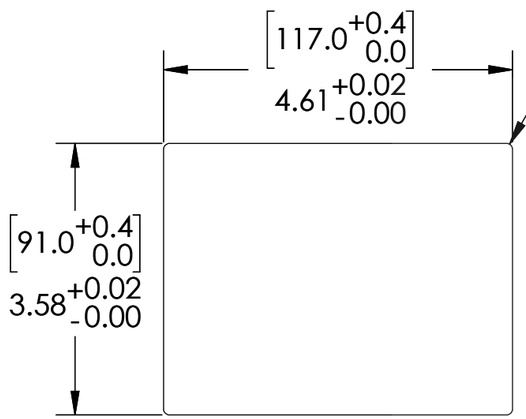

[2.0 MAX]
R0.08 MAX

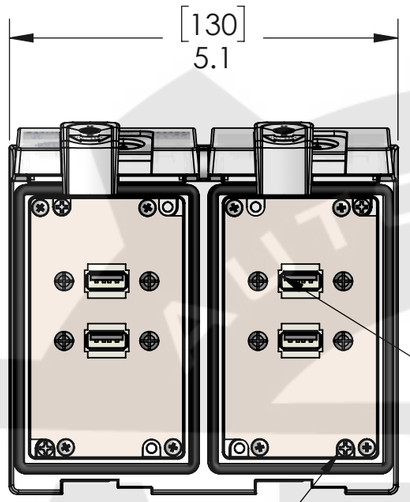

(4X) USB PCBL TYPE A FEMALE
EXTERIOR/MALE INTERIOR

(X4) USE PH2 SCREW DRIVER ON MOUNTING SCREWS. (REF. MOUNTING SCREW TORQUE)

ROTATE TWO TURNS COUNTER CLOCKWISE TO RELEASE THE TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO THEIR CLAMPING POSITION AS MOUNTING SCREWS TIGHTEN. DO NOT OVER-TORQUE!

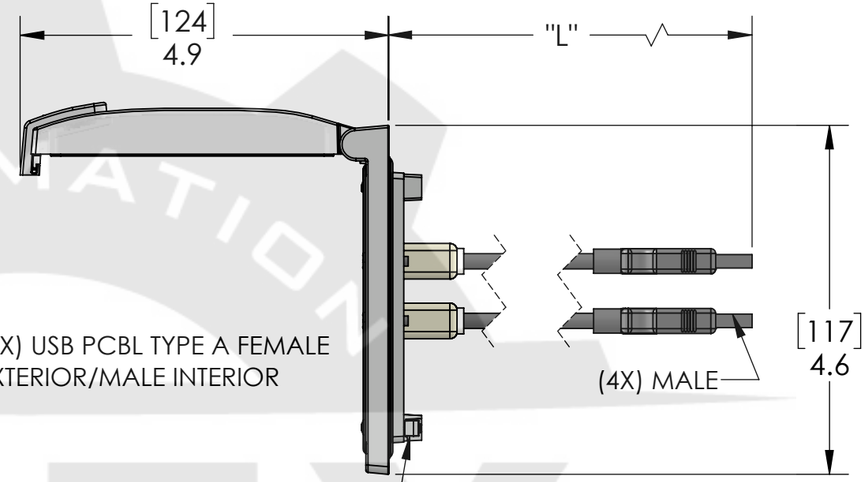

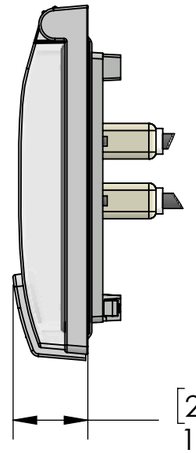

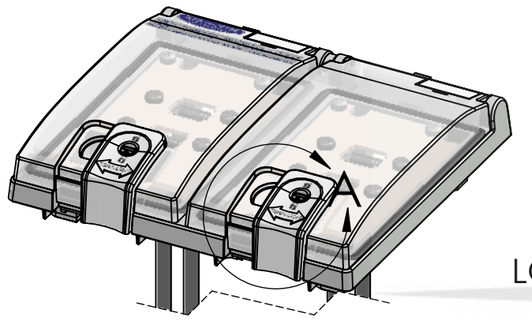



SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK



DETAIL A
SCALE 1 : 1

PART NUMBER	LENGTH "L"
LP2-4USB-01	1 FOOT
LP2-4USB-03	3 FEET
LP2-4USB-06	6 FEET

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

c UL us LISTED ENCL. ACC. 5JR2

PIC RATINGS/SPECIFICATIONS	
NEMA/UL | EN 60529:	4, 12 | IP65
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m

HOUSING MATERIALS	
BODY:	NICKEL PLATED ZINC
GASKETS:	PUR FIPG
FRONT COVER:	POLYCARBONATE
LATCH & LOCK:	PBT

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	DCG
DRAWN DATE	08/22/2018
CHECKED BY	JJH
CHECK DATE	08/22/2018

COMMENTS:

MENCOM CORPORATION

TITLE:

USB PCBL AFAM X 4; LP2

SIZE	DWG. NO.	REV
B	LP2-4USB-ZZ	A

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1