


Revisions			
REV.	DESCRIPTION	DATE	DRAWN BY
A	RELEASED	9/25/2019	DCG

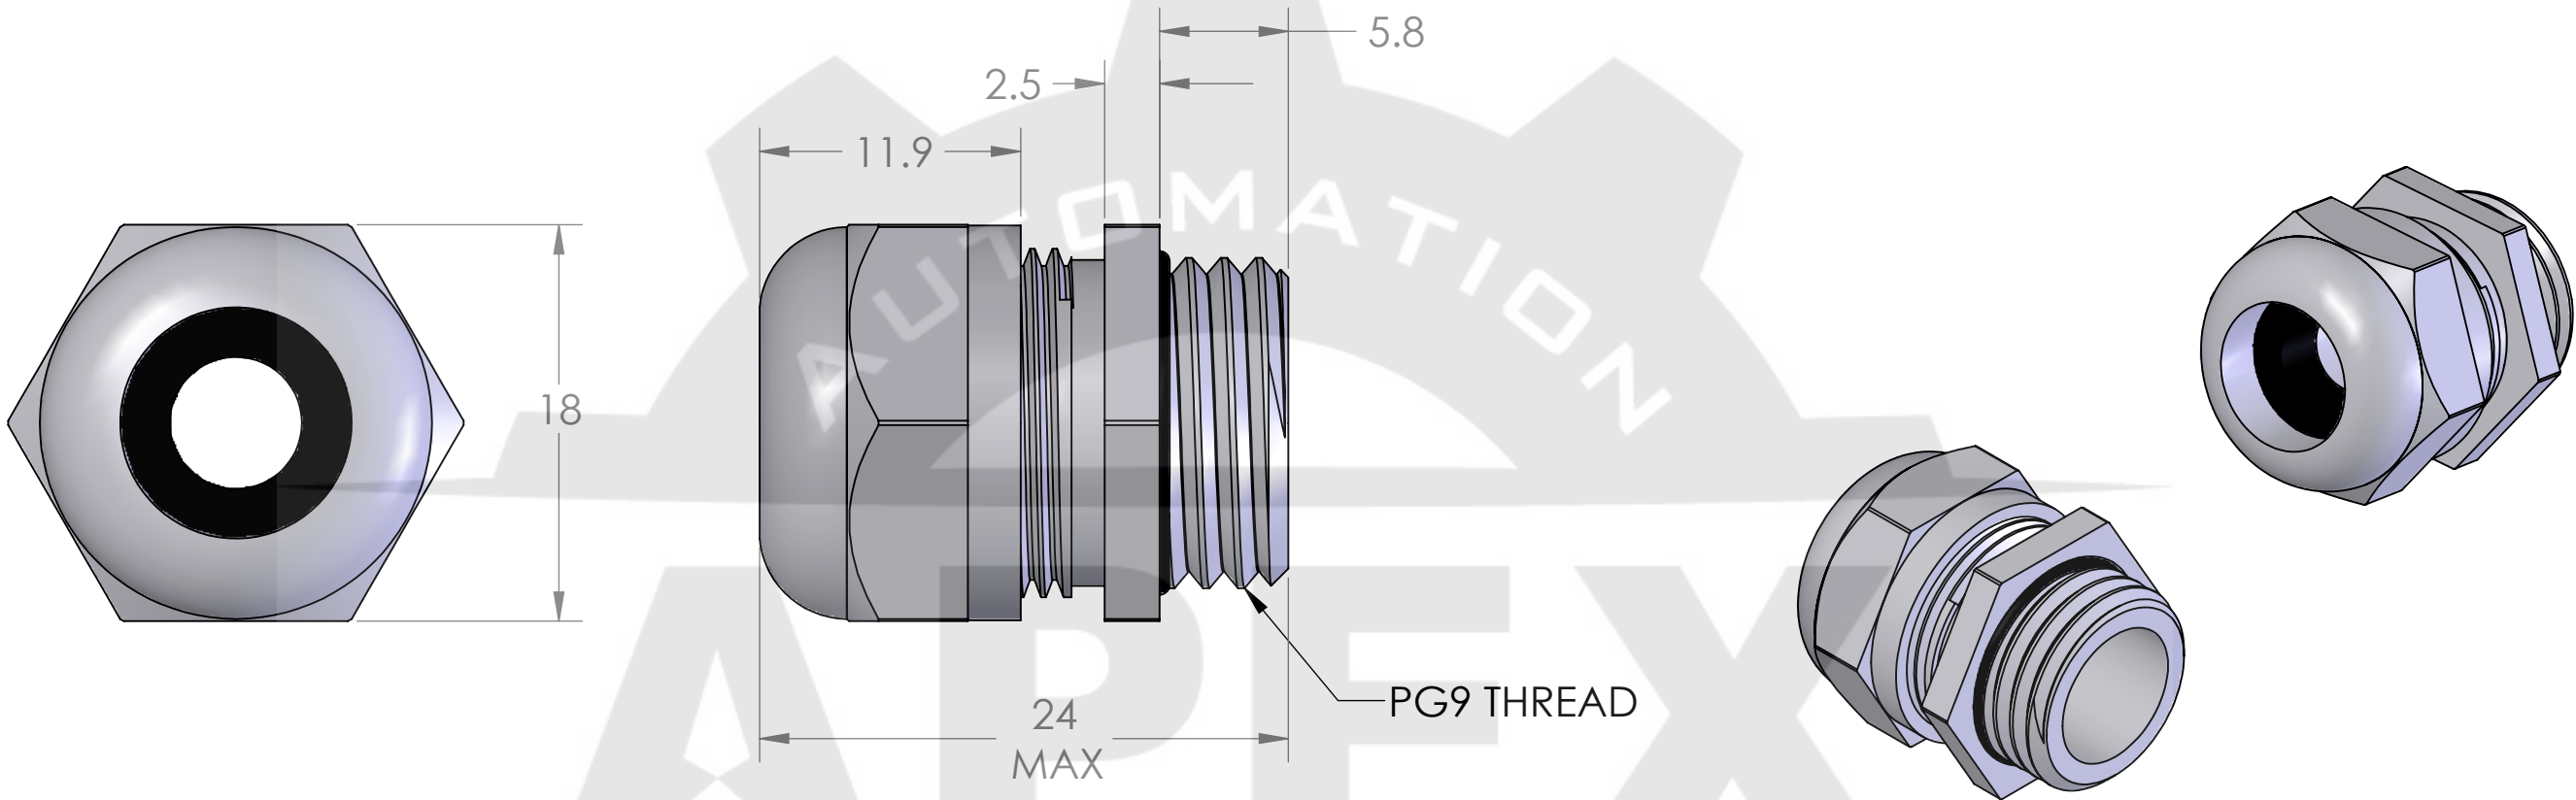

LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED TO: IP 65

SPECIFICATIONS:	
TIGHTENING TORQUE:	6.25 Nm
TEMPERATURE:	-30°C - +110°C

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

PART NUMBER	SEALING RANGE
MCGW-09	.197 - .394 [5 - 10 MM]

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DCG
DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm 3^\circ$ BEND $\pm 5^\circ$ ONE PLACE DECIMAL $\pm .2$ TWO PLACE DECIMAL $\pm .1$	DRAWN DATE	09/25/2019
	CHECKED BY	JJH
	CHECK DATE	09/25/2019

	COMMENTS:
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

MENCOM CORPORATION		
TITLE: PG9 METAL CBL GLND 5 - 10MM		
SIZE B	DWG. NO. MCGW-09	REV A
SCALE: 3:1	WEIGHT:	SHEET 1 OF 1