
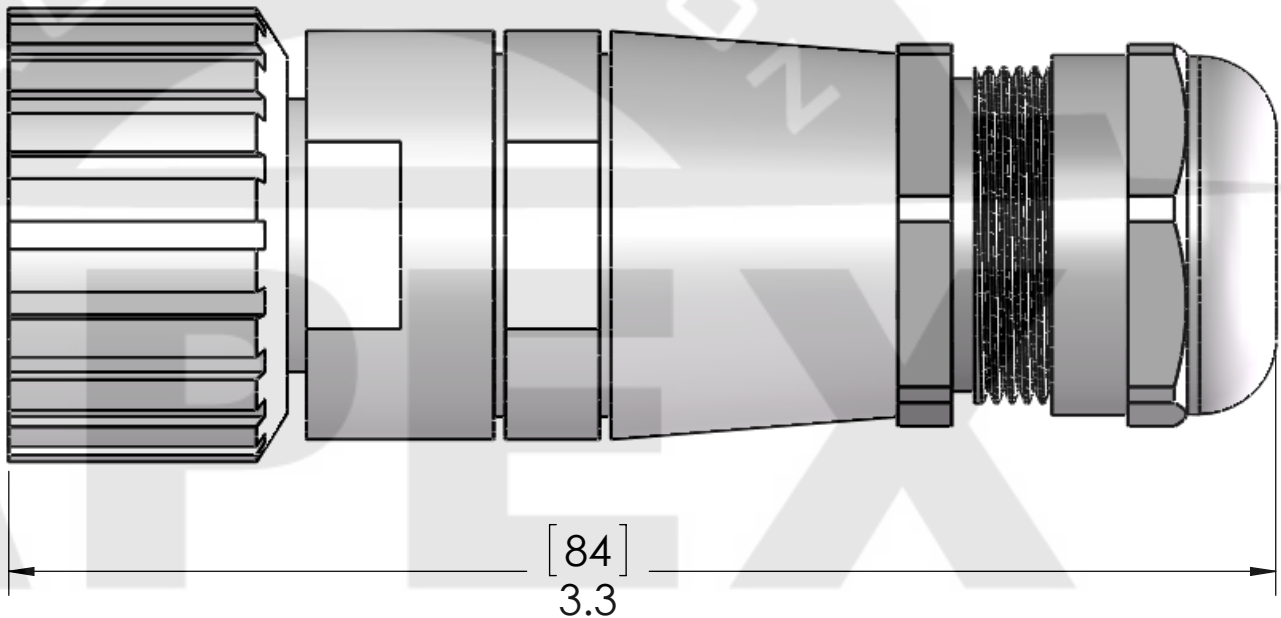


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	4/21/2014	BEM

M27x1
FEMALE
THREAD

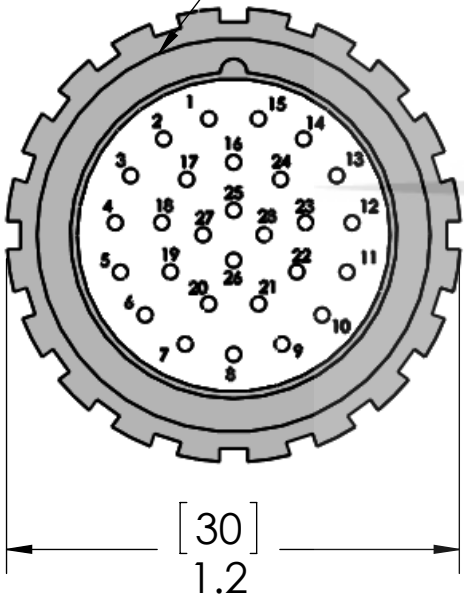

ALL CONNECTIONS MADE VIA SOLDER

MATERIALS:	
BODY:	NICKEL PLATED BRASS
SEALS:	FPM & NBR
GLAND:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	PA
RATINGS:	
VOLTS:	150V
AMPS:	1.5A
TEMP:	-40°C - +105°C
WIRE AWG:	18AWG max
CABLE DIA.:	0.394-0.551" [10-14mm]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

VOLTS	150V
AMPS	1.5A
TEMP	105C
APPLICATION	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN MM	DRAWN	JJH
TOLERANCES:	CHECKED	
ANGULAR: MACH±5° BEND ±5°	ENG APPR.	
ONE PLACE DECIMAL ±.2	MFG APPR.	
TWO PLACE DECIMAL ±.1	Q.A.	
INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:
28 PL M27 FEM PLG SLDR CUP

SIZE	DWG. NO.	REV
B	MCX-28FP-FW-SC	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1